

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

PHYSICAL PROPERTIES:
HOUSING MATERIAL: PBT
FLAMMABILITY: UL94V-0
COLOR: BLACK
MAX BOW/WARP: .0056 IN/IN.

MECHANICAL:
PITCH (TERMINAL SPACING): .563"
WIRE RANGE: 10-22 AWG
RECOMMENDED TIGHTENING TORQUE: 14IN-LBS MAX.

ELECTRICAL PROPERTIES:
MAXIMUM CURRENT: 30A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP RANGE: -40°C TO 120°C

TERMINAL:
TERMINALS: BRASS, TIN PLATED. (UNLESS OTHERWISE STATED)
SCREWS: 8-32 STEEL, NICKEL PLATED. (UNLESS OTHERWISE STATED)
Q.C. TABS: BRASS, NICKEL PLATED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	T5	PART STATUS UPDATED	22JAN2018	RK	PS

△

STAINLESS STEEL SCREWS.

△

WHITE INK STAMP.

△

NICKEL PLATED BRASS TERMINALS.

△

NICKEL PLATED BRASS SCREWS.

△

SEE FIGURE.

△

PRELIMINARY PART NUMBER.

△

OBSOLETE PART NUMBER.

△

TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.

△	5	-	-	-	-	-	-	-	-	-	7.886	8.323	13	1-1546310-3								
△	2	7	-	-	-	-	-	12	12	12	7.323	7.760	12	4-1546310-8								
△		8	-	-	-	12	12	12	-	-	7.323	7.760	12	4-1546310-7								
△		-	-	-	-	12	12	12	-	-	7.323	7.760	12	4-1546310-6								
	-	-	-	-	-	-	-	-	-	-	7.323	7.760	12	1-1546310-2								
	-	-	-	-	-	-	-	-	-	-	6.760	7.179	11	1-1546310-1								
	-	-	-	-	-	-	-	-	-	-	6.197	6.634	10	1-1546310-0								
	-	-	-	-	-	-	-	-	-	-	5.634	6.071	9	1546310-9								
△	4	7	-	-	-	-	-	-	-	8	5.071	5.508	8	4-1546310-5								
	-	8	8	-	-	-	-	-	-	-	5.071	5.508	8	2-1546310-9								
	-	-	-	-	-	-	-	-	-	-	5.071	5.508	8	1546310-8								
△		-	-	-	-	-	7	-	-	-	4.508	4.945	7	3-1546310-8								
	-	-	-	-	-	-	-	-	-	-	4.508	4.945	7	1546310-7								
△	4	7	-	-	-	-	-	-	-	6	3.945	4.382	6	4-1546310-4								
△	4	7	-	-	-	-	-	-	-	-	3.945	4.382	6	4-1546310-3								
△		-	-	-	-	-	-	-	-	6	3.945	4.382	6	4-1546310-2								
△	5	3	2	1	7	-	-	-	-	-	3.945	4.382	6	3-1546310-1								
	-	-	-	-	-	6	-	-	-	-	3.945	4.382	6	3-1546310-0								
	-	6	6	-	-	-	-	-	-	-	3.945	4.382	6	2-1546310-8								
△	5	4	3	7	-	5	1	-	-	-	3.945	4.382	6	2-1546310-6								
△	1	7	-	-	-	-	-	6	-	6	3.945	4.382	6	2-1546310-3								
△	1	7	-	-	-	6	-	-	-	-	3.945	4.382	6	2-1546310-2								
△	7	-	-	-	-	-	-	-	-	6	3.945	4.382	6	2-1546310-1								
△	5	2	7	-	-	-	-	-	6	6	3.945	4.382	6	1546636-1								
△	6	1	-	-	6	-	-	-	6	-	3.945	4.382	6	1-1546310-9								
△	1	-	-	-	6	-	-	-	-	-	3.945	4.382	6	1546589-1								
	-	-	-	-	-	-	-	-	-	-	3.945	4.382	6	1546310-6								
	-	-	-	-	-	5	-	-	-	-	3.382	3.819	5	3-1546310-7								
△	5	4	3	7	-	-	1	-	-	5	3.382	3.819	5	2-1546310-7								
	-	-	-	-	-	-	-	-	-	-	3.382	3.819	5	1546310-5								
△	2	6	-	-	-	-	-	4	4	4	2.819	3.256	4	5-1546310-0								
△	5	4	3	2	7	-	-	-	-	-	2.819	3.256	4	4-1546310-1								
△	4	-	-	-	-	-	-	-	-	-	2.819	3.256	4	4-1546310-0								
△	5	3	2	1	7	-	-	-	-	-	2.819	3.256	4	3-1546310-9								
	-	-	-	-	-	-	-	-	-	-	2.819	3.256	4	1546310-4								
	4	3	7	-	-	-	-	-	-	-	2.256	2.693	3	2-1546310-5								
	5	1	7	-	-	-	-	3	1	-	2.256	2.693	3	2-1546310-4								
△	6	5	1	-	1	2	-	1	-	-	2.256	2.693	3	2-1546310-0								
	-	-	-	-	-	-	-	-	-	-	2.256	2.693	3	1546310-3								
	-	-	-	-	-	-	2	-	2	-	1.693	2.130	2	5-1546310-1								
	-	-	-	-	-	-	-	-	-	-	1.693	2.130	2	1546310-2								
NOTES	9	OTB JUMPER	8	.250 QC TAB 90° DOUBLE SIDE	7	.250 QC TAB 90°/45° DOUBLE SIDE	6	.250 QC TAB 90° DOUBLE SIDE	5	.250 QC TAB 45° DOUBLE SIDE	4	.250 QC TAB STRAIGHT DOUBLE SIDE	3	.250 QC TAB 90° SINGLE SIDE	2	.250 QC TAB 45° SINGLE SIDE	1	.250 QC TAB STRAIGHT SINGLE SIDE	DIM B	DIM A	NO. OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

-

TOLERANCES, UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± -

FINISH

-

DWN S SCHLEGEL 16FEB2007

CHK S YODER 2/16/07

APVD S YODER 2/16/07

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING




TE Connectivity Ltd.

NAME 14.3 (.563) DBL ROW BARRIER STRIP
W/O WASHER -

SIZE A2CAGE CODE 00779DRAWING NO 1546310RESTRICTED TO -

SCALE NTS SHEET 1 OF 4 REV T5

1471-9 (1/15)

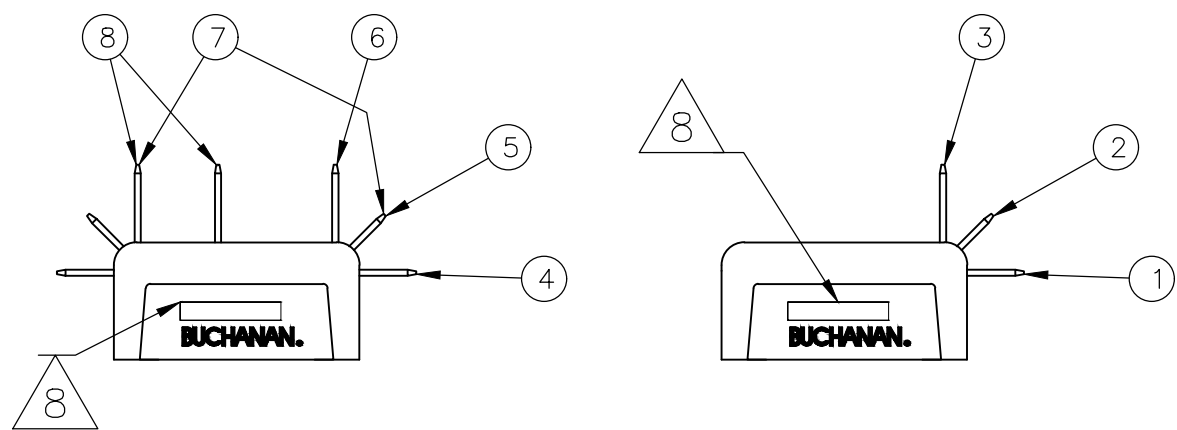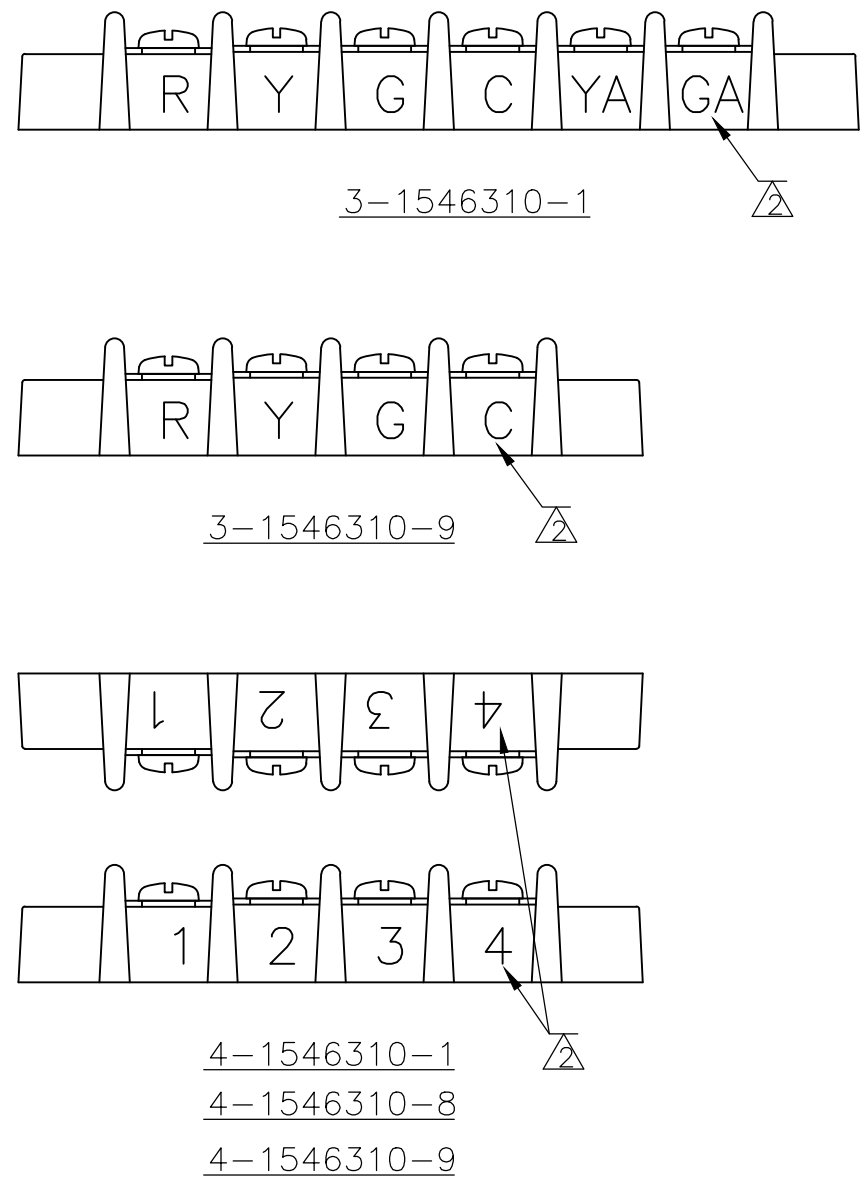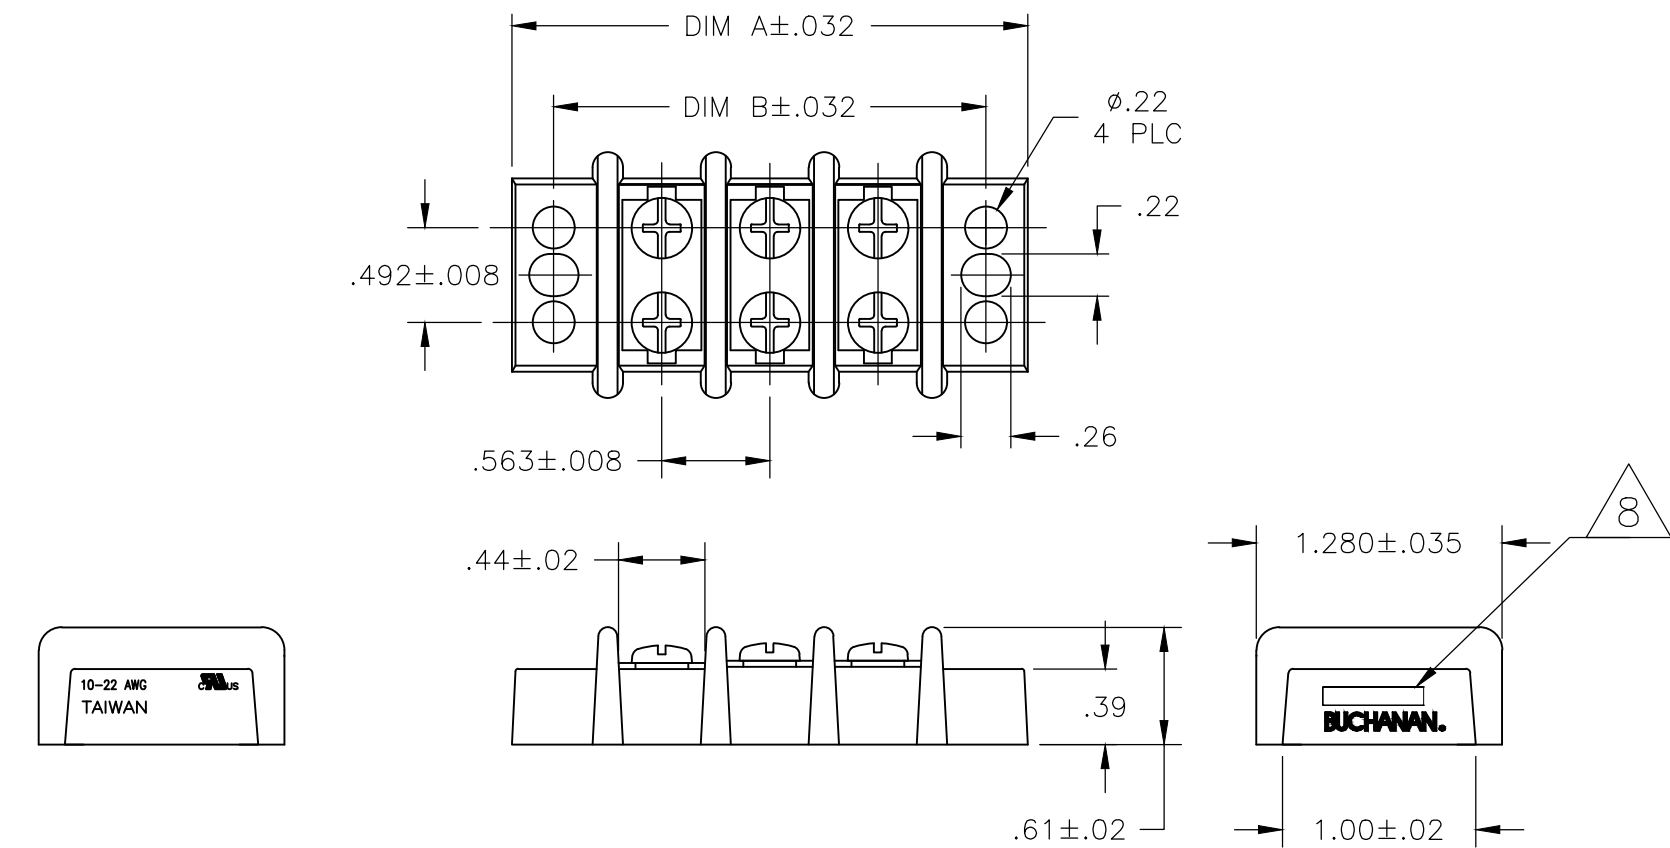

	-	-	-	-	-	-	2	-	2	-	1.693	2.130		5-1546310-1
	-	-	-	-	-	-	-	-	-	-	10.701	11.138	18	1-1546310-8
	-	-	-	-	-	-	-	-	-	-	10.138	10.575	17	1-1546310-7
	-	-	-	-	-	-	-	-	-	-	9.575	10.012	16	1-1546310-6
	-	-	-	-	-	-	-	-	-	-	9.012	9.449	15	1-1546310-5
	-	-	-	-	-	-	-	-	14	14	8.449	8.886	14	4-1546310-9
	-	-	-	-	-	-	-	-	-	-	8.449	8.886	14	1-1546310-4
NOTES	9	8	7	6	5	4	3	2	1		DIM B	DIM A	NO. OF POSN	PART NUMBER
	OTB JUMPER	.250 QC TAB 90° DOUBLE SIDE	.250 QC TAB 90°/45° DOUBLE SIDE	.250 QC TAB 90° DOUBLE SIDE	.250 QC TAB 45° DOUBLE SIDE	.250 QC TAB STRAIGHT DOUBLE SIDE	.250 QC TAB 90° SINGLE SIDE	.250 QC TAB 45° SINGLE SIDE	.250 QC TAB STRAIGHT SINGLE SIDE					

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

MATERIAL

-

TOLERANCES, UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-

FINISH

-

DWN 16FEB2007

CHK 2/16/07

APVD 2/16/07

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

-

CUSTOMER DRAWING

TE Connectivity Ltd.

NAME 14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER

SIZE A2

CAGE CODE 00779

DRAWING NO C-1546310

RESTRICTED TO

-


SCALE NTS

SHEET 2 OF 4


REV T5

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

D

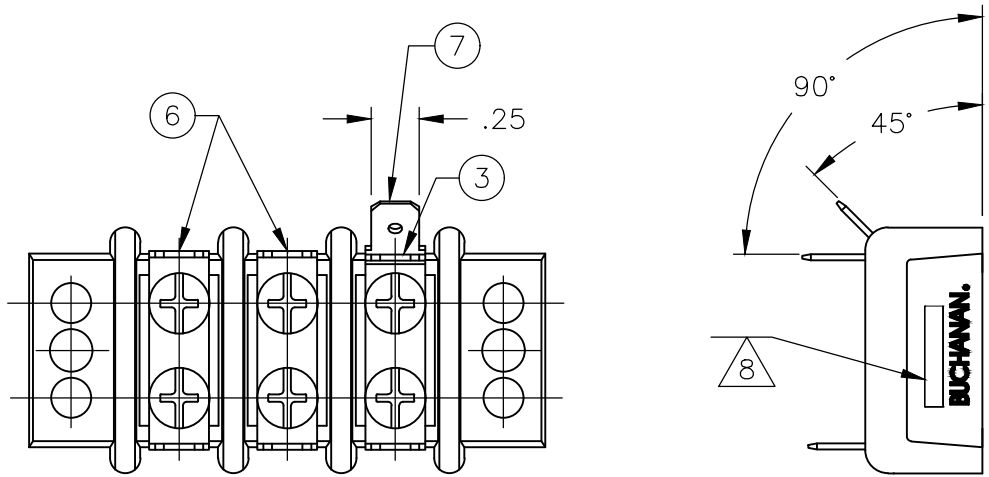


2-1546310-0

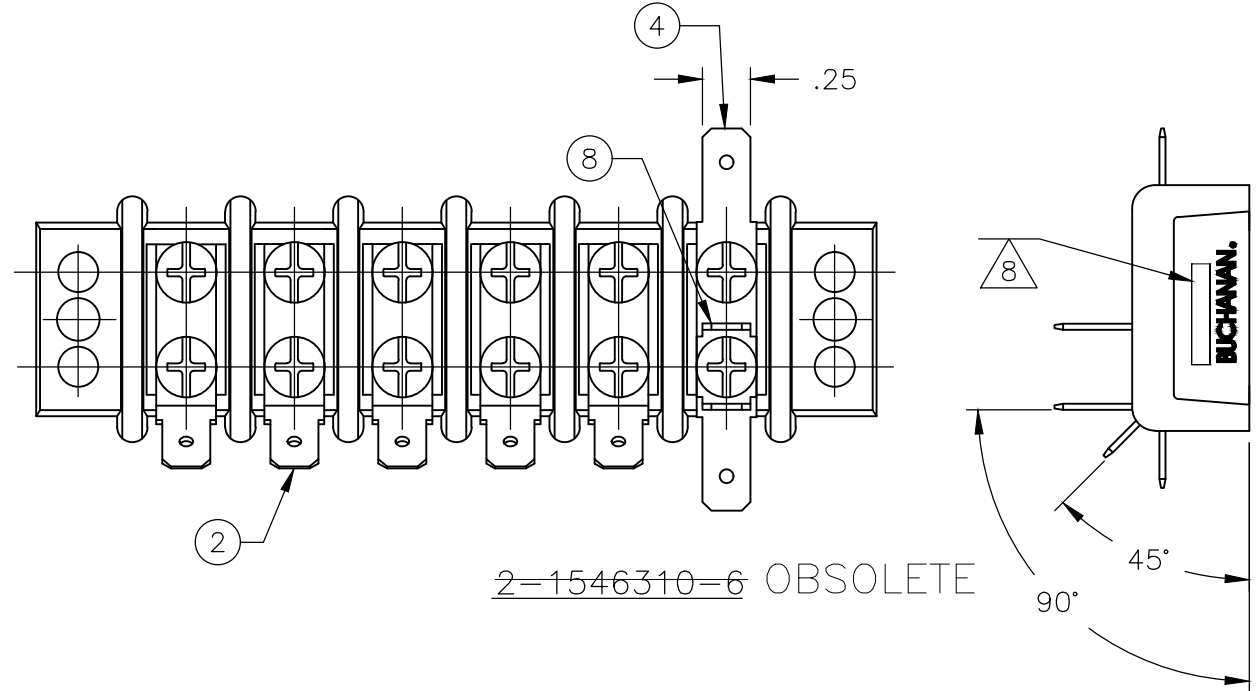


2-1546310-6 OBSOLETE


C

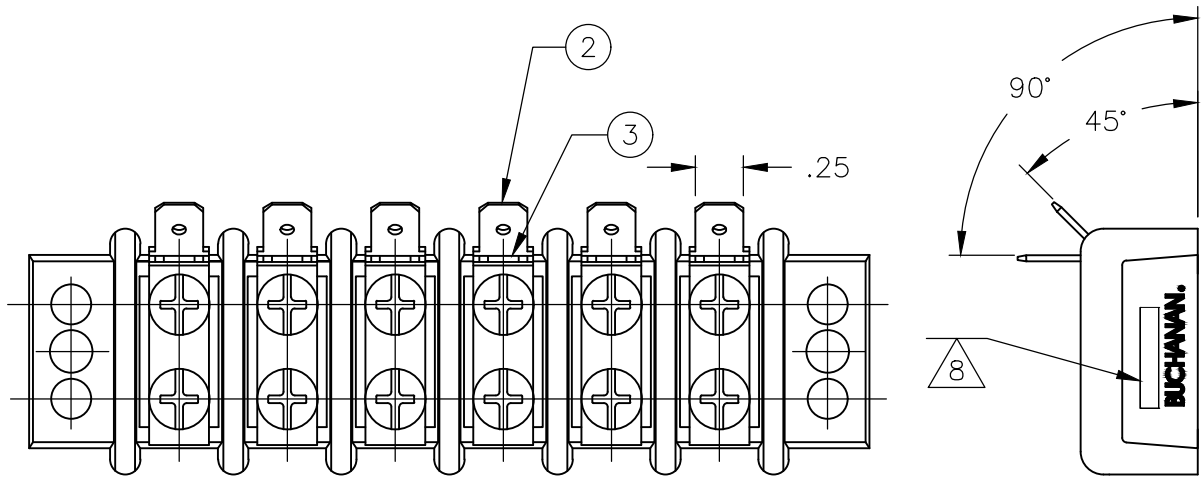


OBSOLETE 1-1546636-1

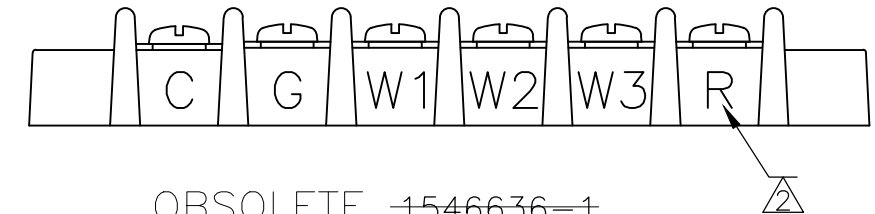

B

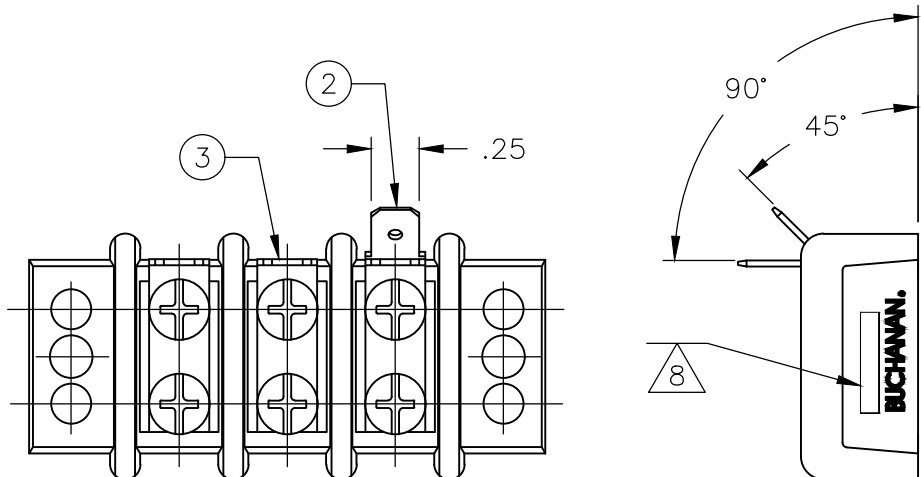

2-1546310-4 OBSOLETE

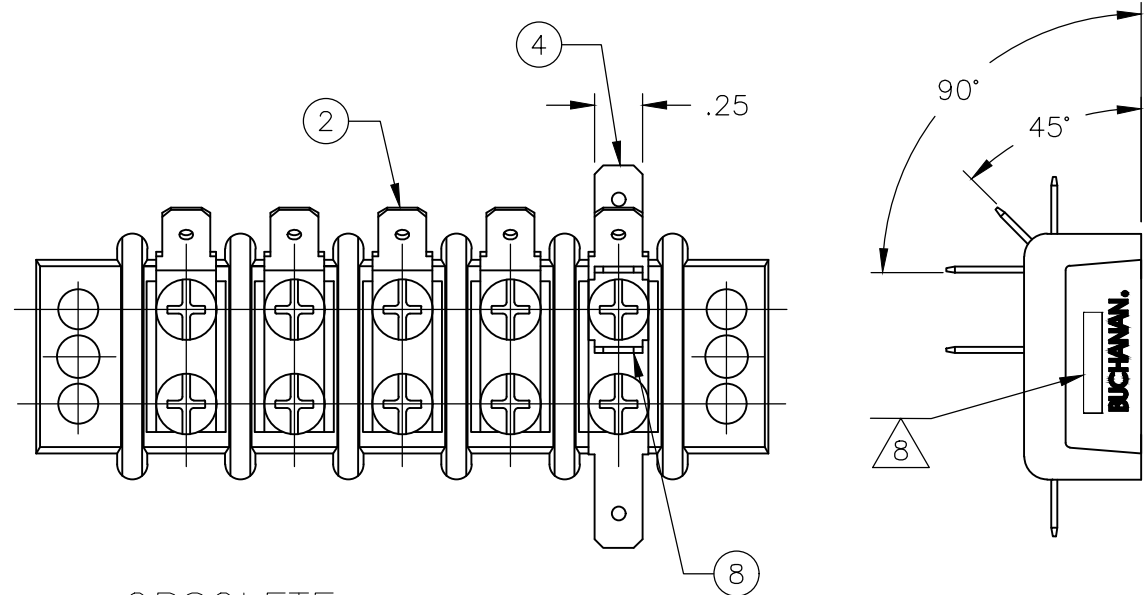

OBSOLETE 2-1546310-7

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 16FEB2007	TE Connectivity Ltd.		
DIMENSIONS: INCHES		CHK S YODER 2/16/07			
	TOLERANCES, UNLESS OTHERWISE SPECIFIED:	APVD S YODER 2/16/07	NAME 14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER		
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC APPLICATION SPEC			
MATERIAL -	FINISH -	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C-1546310
CUSTOMER DRAWING			SCALE NTS	SHEET 3 OF 4	REV T5

D

C

1546310

B

A

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

D

C

B


A

D


C

B


A

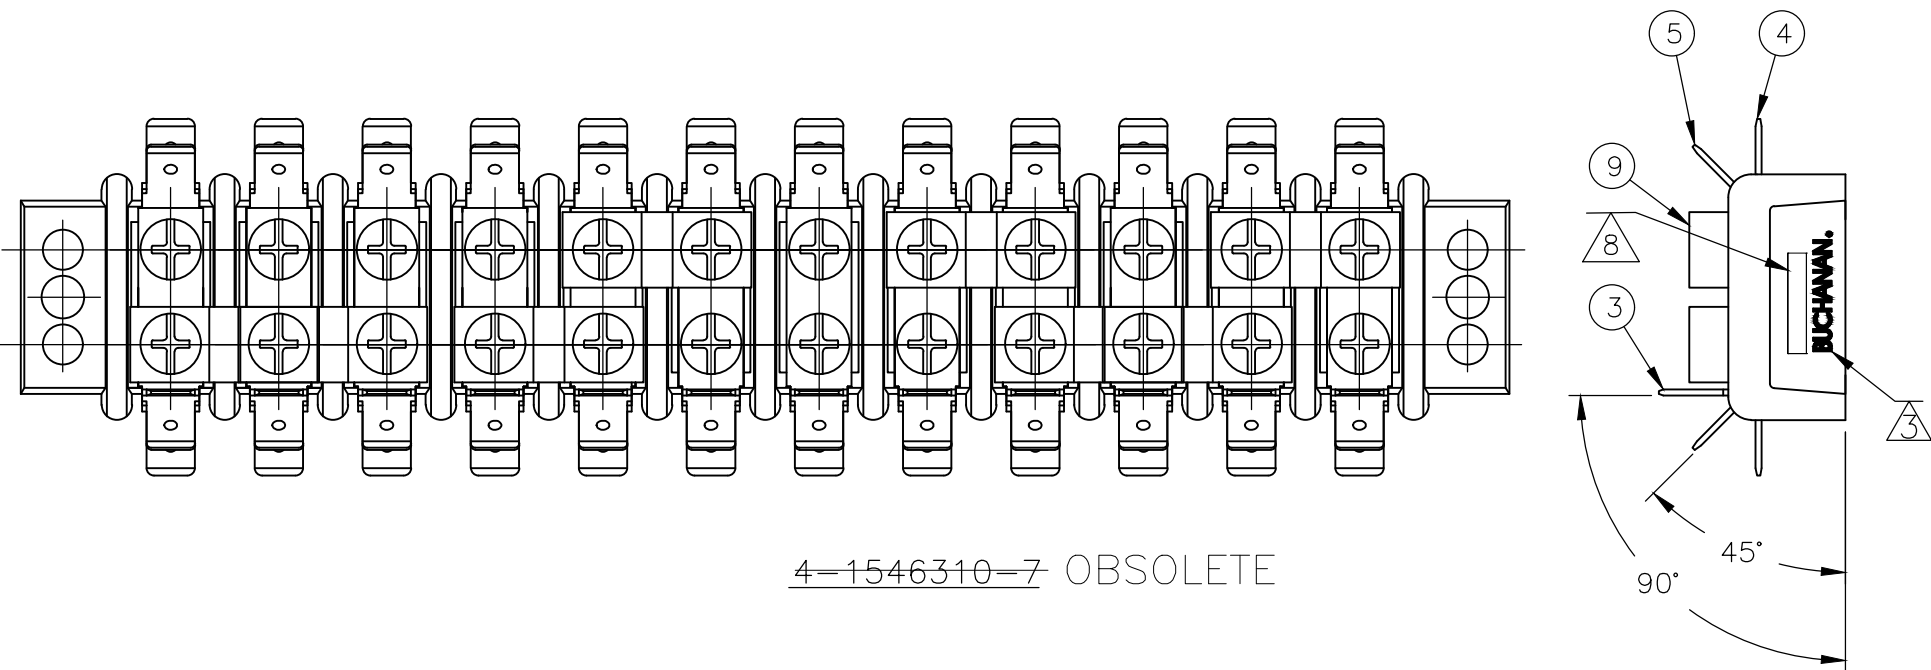

4-1546310-7 OBSOLETE

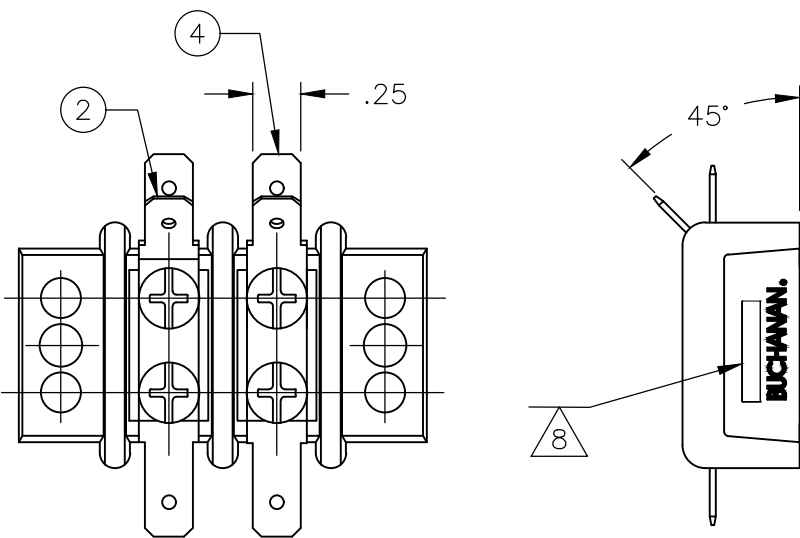

5-1546310-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	16FEB2007	 TE Connectivity Ltd.	
		CHK	2/16/07		
		APVD	2/16/07		
		PRODUCT SPEC			
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC	± -	14.3 (.563) DBL ROW BARRIER STRIP W/O WASHER	
		1 PLC	± -		
		2 PLC	± -		
		3 PLC	± -		
		4 PLC	± -		
MATERIAL		FINISH		SIZE	RESTRICTED TO
				A2	
				CAGE CODE	
				00779	
				DRAWING NO	
				C-1546310	
				SCALE	
				NTS	
				SHEET	
				4 OF 4	
				REV	
				T5	

1546310



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.