

Features

Switching Regulator

- Efficiency up to 94%, no need for heatsinks
- Pin compatible with LM78XX linears
- Low profile (L/W/H=11.5 x 7.55 x 10.2mm)
- Wide input range
- Short circuit protection, thermal shutdown
- Low ripple and noise
- IEC/EN60950-1 certified



R-78-1.0

1.0 Amp
SIP3
Single Output



Description


The R-78xx-1.0 series switching regulators are ideally suited to replace 1 Amp 78xx linear regulators and are pin compatible. Efficiencies of up to 94% mean that very little energy is wasted as heat so there is no need for any heat sinks with their additional space and mounting costs.

Selection Guide

| Part Number | Input Voltage Range [VDC] | Output Voltage [VDC] | Output Current [A] | Efficiency | |
|-------------|---------------------------|----------------------|--------------------|---------------|----------------|
| | | | | @ min Vin [%] | @ max. Vin [%] |
| R-781.8-1.0 | 4.75 - 18 | 1.8 | 1.0 | 82 | 76 |
| R-782.5-1.0 | 4.75 - 18 | 2.5 | 1.0 | 87 | 81 |
| R-783.3-1.0 | 4.75 - 18 | 3.3 | 1.0 | 90 | 84 |
| R-785.0-1.0 | 6.5 - 18 | 5.0 | 1.0 | 94 | 89 |



Model Numbering




IEC/EN60950-1 certified
EN55032 compliant

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)


| BASIC CHARACTERISTICS | | | | |
|---|---|--------|---------|---------|
| Parameter | Condition | Min. | Typ. | Max. |
| Quiescent Current | Vin = min. to max. at 0% load | | 5mA | 7mA |
| Internal Power Dissipation | | | | 0.4W |
| Minimum Load ⁽¹⁾ | | 0% | | |
| Internal Operating Frequency | | 280kHz | 350kHz | 430kHz |
| Output Ripple and Noise | measured at 20MHz BW | | 20mVp-p | 30mVp-p |
| Absolute Maximum Capacitive Load | 1 second start up, no external components | | | 220µF |
| | <1 second start up + diode protection circuit | | | 6800µF |
| Notes: Note1: Operation under no load will not harm the converter, but specifications may not be met A minimum load of 10mA is recommended | | | | |
| continued on next page | | | | |

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)


Efficiency vs. Vin (full load)

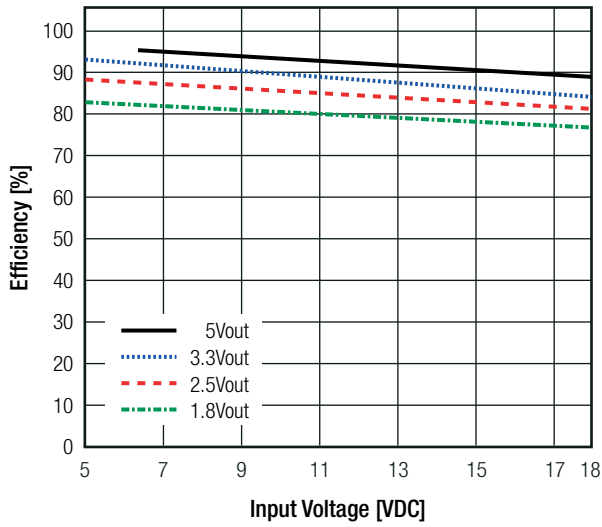


Ripple vs. Vin (full load)

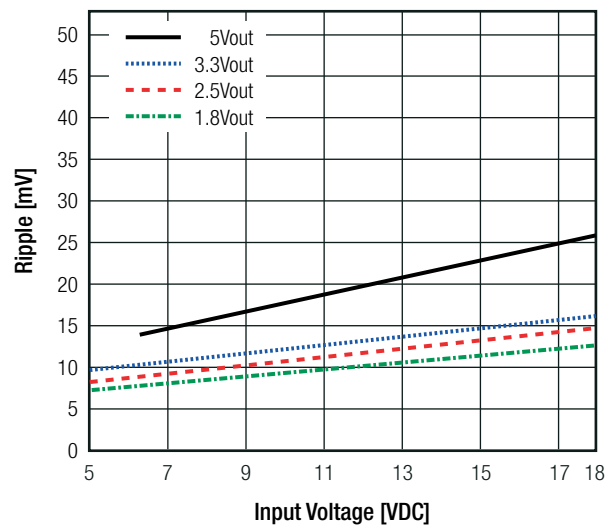


Efficiency vs. Load (max. Vin)

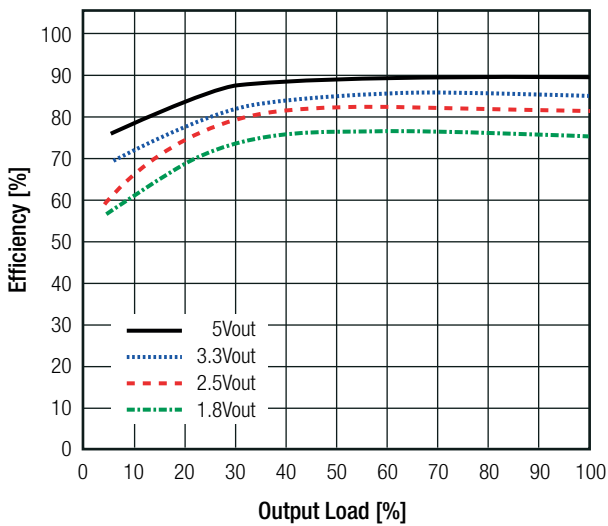


Ripple vs. Load (max. Vin)

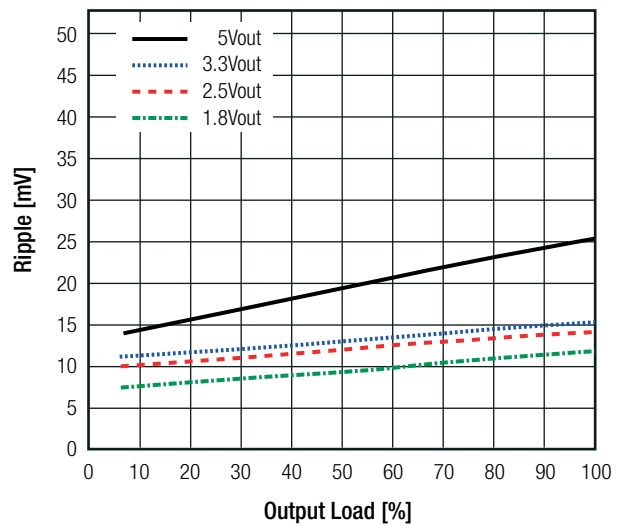

Efficiency vs. Load (min. Vin)

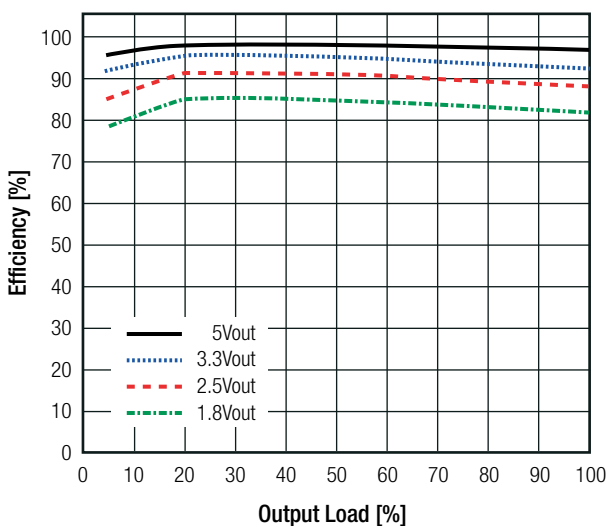

Ripple vs. Load (min. Vin)

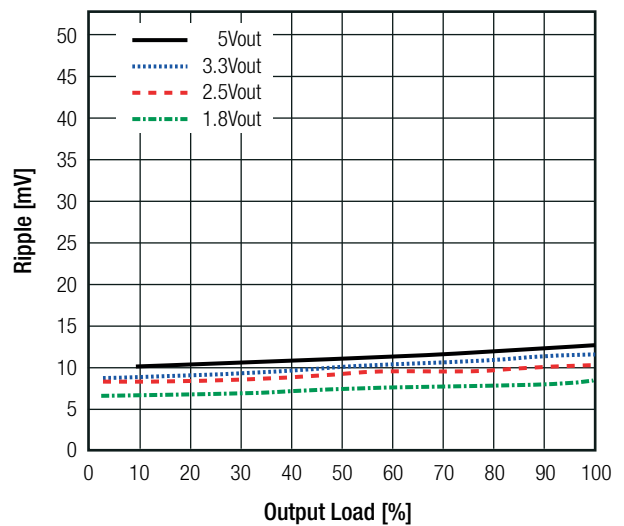

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

| REGULATIONS | | |
|--------------------|----------------------------------|--------------------------|
| Parameter | Condition | Value |
| Output Accuracy | 100% load | ±2.0% typ / ±3.0% max. |
| Line Regulation | low line to high line, 100% load | ±0.2% typ. / ±0.4% max. |
| Load Regulation | 10% to 100% load | ±0.4% typ. / ±0.6% max. |
| Transient Response | 100% <-> 50% load | ±85mV typ. / ±100mV max. |


| PROTECTIONS | | |
|--------------------------------|-----------------|--------------------------------|
| Parameter | Condition | Value |
| Short Circuit Protection (SCP) | | continuous, automatic recovery |
| Short Circuit Input Current | nom. Vin= 12VDC | 100mA max. |

Optional Diode Protection Circuit


Add a blocking diode to Vout if current can flow backwards into the output, as this can damage the converter when it is powered down.

The diode can either be fitted across the device if the source is low impedance or fitted in series with the output (recommended).

Optional Protection 1:

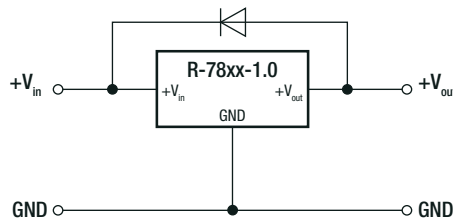


Optional Protection 2:

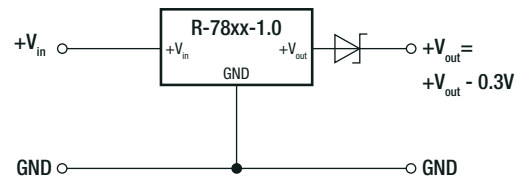

| ENVIRONMENTAL | | | |
|-----------------------------|----------------------------------|----------------|---|
| Parameter | Condition | | Value |
| Operating Temperature Range | with derating (see graph) | | -40°C to +85°C |
| Maximum Case Temperature | | | +100°C |
| Temperature Coefficient | | | ±0.015%/K |
| Thermal Impedance | 0.1 m/s, vertical | | 70K/W |
| Operating Altitude | | | 2000m |
| Operating Humidity | non-condensing | | 95% RH max. |
| Pollution Degree | | | PD2 |
| MTBF | according to MIL-HDBK-217F, G.B. | +25°C +71°C | 13338 x 10 ³ hours 3880 x 10 ³ hours |

Derating Graph

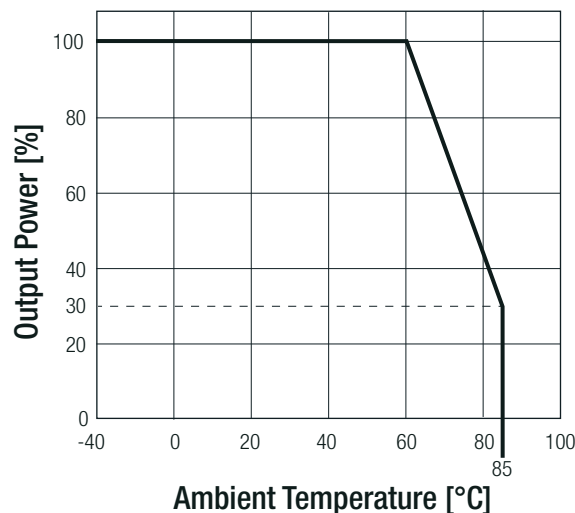


Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

SAFETY AND CERTIFICATIONS

| Certificate Type (Safety) | Report / File Number | Standard |
|---|----------------------|--|
| Information Technology Equipment, General Requirements for Safety | 1603123 | IEC60950-1:2005, 2nd Edition + AM 2:2013 EN60950-1:2006 + AM 2:2013 |
| EAC | RU-AT.49.09571 | TP TC 004/2011 |
| RoHs 2+ | | RoHS 2011/65/EU + AM2015/863 |

| EMC Compliance | Condition | Standard / Criterion |
|---|---|-------------------------|
| Electromagnetic compatibility of multimedia equipment - Emission requirements | with external filter (see filter suggestion below) | EN55032, Class A and B |
| ESD Electrostatic discharge immunity test | Contact $\pm 6kV$ | EN61000-4-2, Criteria A |
| Radiated, radio-frequency, electromagnetic field immunity test | 3V/m | EN61000-4-3, Criteria A |
| Fast Transient and Burst Immunity | $\pm 1.0kV$ | EN61000-4-4, Criteria A |
| Immunity to conducted disturbances, induced by radio-frequency fields | 3V | EN61000-4-6, Criteria A |
| Power Magnetic Field Immunity | 50Hz, 3A/m | EN61000-4-8, Criteria A |

EMC Filter Suggestion according to EN55032

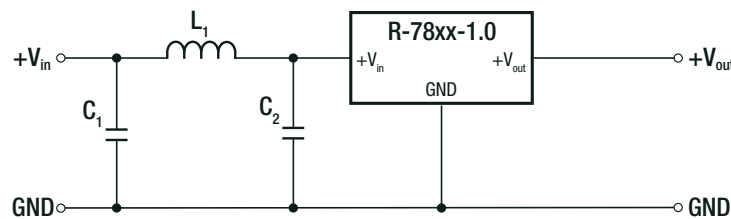

Component List Class A

| MODEL | C1 | L1 |
|-------------|------------|-------------------|
| R-783.3-1.0 | 10 μ F | 3.9 μ H choke |
| R-785.0-1.0 | 100V MLCC | RLS-397 |

Component List Class B

| MODEL | C1 | C2 | L1 |
|-------------|------------|-------------|-------------------|
| R-783.3-1.0 | 10 μ F | 2.2 μ F | 5.6 μ H choke |
| R-785.0-1.0 | 100V MLCC | 100V MLCC | RLS-567 |

Notes:


Note2: Filter suggestions are valid for indicated part numbers only. For other part numbers, please contact RECOM tech support for advice

DIMENSION AND PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|---------------------------|------------------------|---|
| Material | case potting PCB | non-conductive black plastic, (UL94 V-0) silicone, (UL94 V-0) FR4, (UL94 V-0) |
| Package Dimension (LxWxH) | | 11.5 x 7.55 x 10.2mm |
| Package Weight | | 1.9g typ. |


continued on next page

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

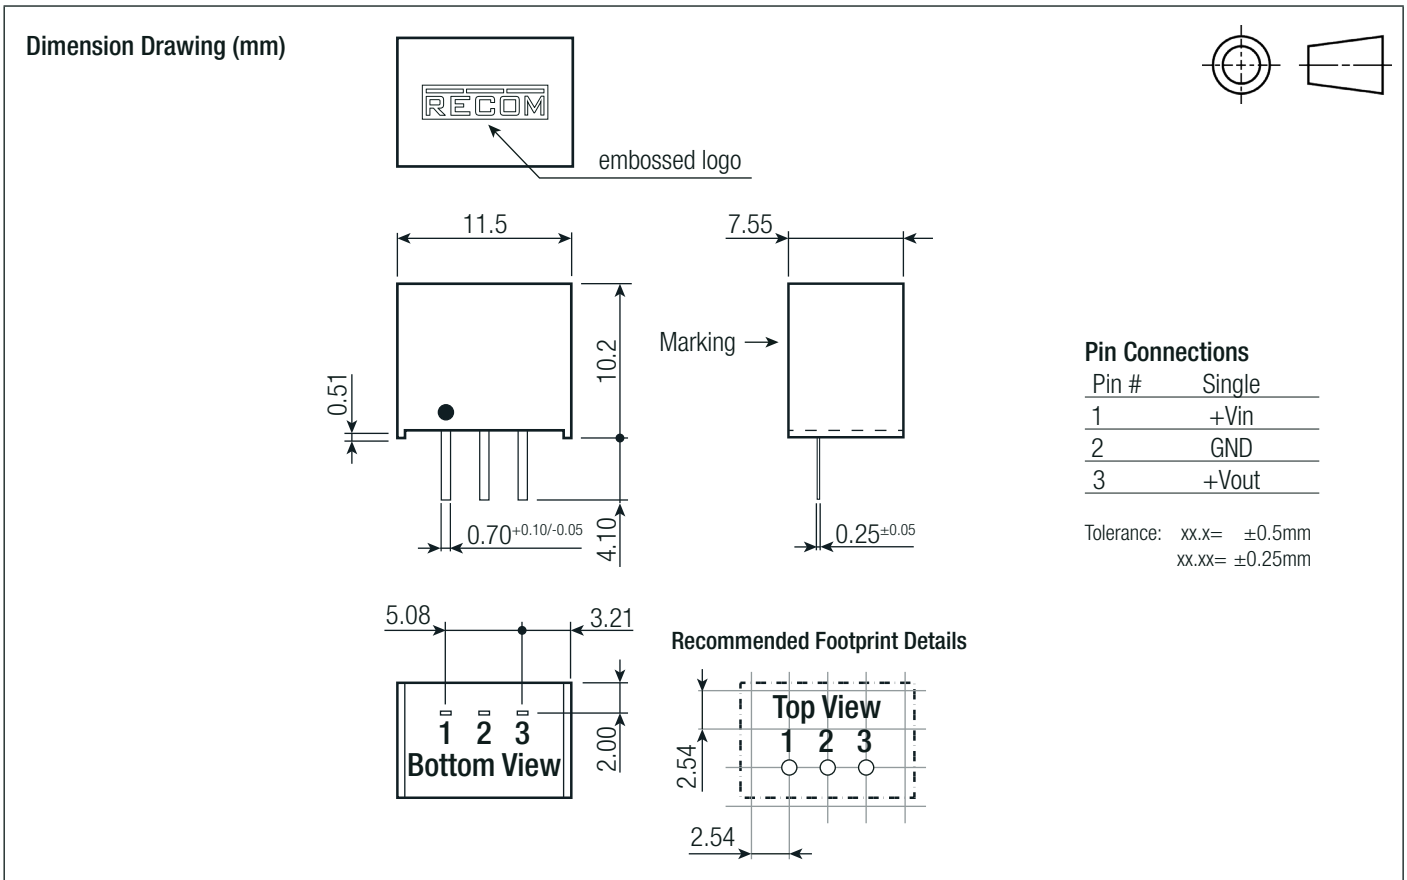

INSTALLATION AND APPLICATION

High Efficiency, Isolated, Dual Unregulated Output

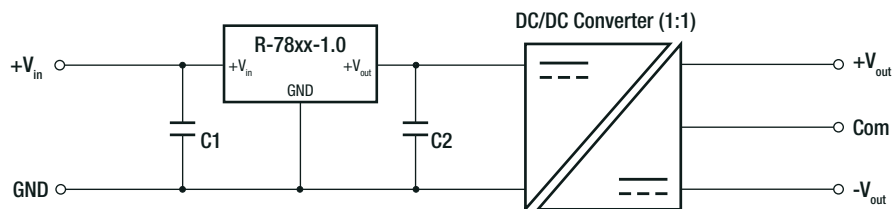


C1: optional

C2: required (further decoupling filtering may be necessary between the two converters)

- Medical grade isolated dual outputs
- Wide input range 6.5V to 18V
- High efficiency, suitable for 12V battery powered devices

Isolated (up to 6kVDC), Wide Input Range Regulated Output

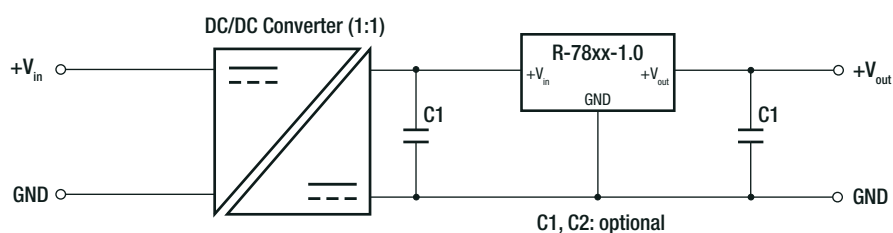

C1, C2: optional

- High isolation voltage
- Improved load / line Regulation
- Wide input voltage
- Point-of-load architecture

Specifications (measured @ Ta= 25°C, 10% minimum load, unless otherwise stated)

| PACKAGING INFORMATION | | |
|-----------------------------|------|----------------------|
| Parameter | Type | Value |
| Packaging Dimension (LxWxH) | tube | 520.0 x 9.3 x 16.5mm |
| Packaging Quantity | tube | 42pcs |
| Storage Temperature Range | | -55°C to +125°C |
| Storage Humidity | | 95% RH max. |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.