

a

Low Voltage 1.2 V to 5.5 V, Bidirectional, Logic Level Translators

Preliminary Technical Data

ADG3304


FEATURES

Bidirectional Level Translation
Operates from 1.2 V to 5.5 V
12 Bump WLCSP package and 14-lead TSSOP
Low Quiescent Current <5 μ A

APPLICATIONS

SPI™, Microwire™ and I²C™ Translation
Low Voltage ASIC level Translation
Smart Card Readers
Cell Phones & Cell-Phone Cradles
Portable Communication Devices
Telecommunications Equipment
Network Switches and Routers
Storage Systems (SAN/NAS)
Computing/Server Applications
GPS
Portable POS Systems
Low Cost Serial Interfaces

FUNCTIONAL BLOCK DIAGRAM



GENERAL DESCRIPTION

The ADG3304 is a 4-Channel bidirectional level translator. Its function is to provide level shifting in a multi-voltage system. The voltage applied to V_{CCA} sets up the logic levels on the A side of the device, while V_{CCY} sets the levels on the Y side. In this way, signals applied to the V_{CCA} side of the device appear as V_{CCY} compatible logic on the other side of the device and vice versa as the device is designed to handle bidirectional signals. The device is guaranteed for operation over the supply range 1.2 V to 5.5 V.

These devices are suited to applications like data transfer between a low voltage DSP/Controller and a higher voltage device. Other applications include high end consumer products where constant changes to the chipset designs result in multiple supply levels in the application.

V_{CCY} operates from +1.65 to 5.5 V while V_{CCA} from +1.2 to V_{CCY} . V_{CCA} must always operate from a supply that is lower than V_{CCY} . When the device Enable pin (EN) is pulled low, the Ax and Yx inputs/outputs are tri-stated. The EN pin is driven high for normal operation. EN pin is referred to V_{CCA} voltage.

PRODUCT HIGHLIGHTS

1. Bidirectional Level Translation.
2. The ADG3304 is fully guaranteed from 1.2 V to 5.5 V supply range.
3. 14 lead TSSOP and 12 lead WLCSP package.

REV. PrC Feb 2004

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
 Tel: 781/329-4700 World Wide Web Site: <http://www.analog.com>
 Fax: 781/326-8703 Analog Devices, Inc., 2004

ADG3304—SPECIFICATIONS¹(V_{CCY} = +1.65 to 5.5 V, V_{CCA} = +1.1 to V_{CCY}, GND = 0 V, All specifications T_{MIN} to T_{MAX} unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ ²	Max	Units
LOGIC INPUTS/OUTPUTS						
Input High Voltage	V _{IH}		V _{CCY} - 0.4			V
Input Low Voltage	V _{IL}		V _{CCA} - 0.4		0.4	V
Output High Voltage	V _{OH}	I _{OH} = 20 μ A,	V _{CCY} - 0.4		0.4	V
Output Low Voltage	V _{OL}	I _{OH} = 20 μ A, I _{OL} = 20 μ A, I _{OL} = 20 μ A,	V _{CCA} - 0.4		0.4	V
Input Leakage Current	I _I	0 $\leq$ V _{IN} $\leq$ 3.6 V			± 1	μ A
Output Leakage Current	I _O	0 $\leq$ V _{IN} $\leq$ 3.6 V			± 1	μ A
Input Capacitance ³	C _{IN}	f = 1 MHz, V _{A/Y} = V _{CCA/Y} or GND		5		pF
Output Capacitance ³	C _O	f = 1 MHz, V _{A/Y} = V _{CCY/A} or GND		5		pF
SWITCHING CHARACTERISTICS³						
3.3V $\pm$ 0.3V $\leq$ V_{CCA} $\leq$ V_{CCY} $\leq$ 5V $\pm$ 0.5V						
Propagation Delay, t _{PD}	Y - A	R _S = 50 Ω , C _A = 15 pF			5	ns
	A - Y	R _S = 50 Ω , C _Y = 50 pF			5	ns
Rise Time	t _{R_Y}	R _S = 50 Ω , C _Y = 50 pF			5	ns
Fall Time	t _{F_Y}	R _S = 50 Ω , C _Y = 50 pF			5	ns
Rise Time	t _{R_A}	R _S = 50 Ω , C _A = 15 pF			5	ns
Fall Time	t _{F_A}	R _S = 50 Ω , C _A = 15 pF			5	ns
Maximum Data Rate		R _S = 50 Ω , C _Y = 50 pF, C _A = 15 pF	40			Mbps
Channel To Channel Skew	t _{SKEW}	R _S = 50 Ω , C _Y = 50 pF, C _A = 15 pF			tbd	ns
Part To Part Skew	t _{PPSKEW}	R _S = 50 Ω , C _Y = 50 pF, C _A = 15 pF			tbd	ns
1.8V $\pm$ 0.15V $\leq$ V_{CCA} $\leq$ V_{CCY} $\leq$ 3.3V $\pm$ 0.3V						
Propagation Delay, t _{PD}	Y - A	R _S = 50 Ω , C _A = 15 pF			10	ns
	A - Y	R _S = 50 Ω , C _Y = 50 pF			15	ns
Rise Time	t _{R_Y}	R _S = 50 Ω , C _Y = 50 pF			10	ns
Fall Time	t _{F_Y}	R _S = 50 Ω , C _Y = 50 pF			10	ns
Rise Time	t _{R_A}	R _S = 50 Ω , C _A = 15 pF			10	ns
Fall Time	t _{F_A}	R _S = 50 Ω , C _A = 15 pF			10	ns
Maximum Data Rate		R _S = 50 Ω , C _Y = 50 pF, C _A = 15 pF	35			Mbps
Channel To Channel Skew	t _{SKEW}	R _S = 50 Ω , C _Y = 50 pF, C _A = 15 pF			5	ns
1.2V $\pm$ 0.1 V $\leq$ V_{CCA} $\leq$ V_{CCY} $\leq$ 3.3 $\pm$ 0.3 V						
Propagation Delay, t _{PD}	Y - A	R _S = 50 Ω , C _A = 15 pF			20	ns
	A - Y	R _S = 50 Ω , C _Y = 50 pF			20	ns
Rise Time	t _{R_Y}	R _S = 50 Ω , C _Y = 50 pF			15	ns
Fall Time	t _{F_Y}	R _S = 50 Ω , C _Y = 50 pF			15	ns
Rise Time	t _{R_A}	R _S = 50 Ω , C _A = 15 pF			15	ns
Fall Time	t _{F_A}	R _S = 50 Ω , C _A = 15 pF			15	ns
Maximum Data Rate		R _S = 50 Ω , C _Y = 50 pF, C _A = 15 pF		20		Mbps
Channel To Channel Skew	t _{SKEW}	R _S = 50 Ω , C _Y = 50 pF, C _A = 15 pF			5	ns
2.5V $\pm$ 0.2V $\leq$ V_{CCA} $\leq$ V_{CCY} $\leq$ 3.3V $\pm$ 0.3V						
Propagation Delay, t _{PD}	Y - A	R _S = 50 Ω , C _A = 15 pF			8.5	ns
	A - Y	R _S = 50 Ω , C _Y = 50 pF			8.5	ns
Rise Time	t _{R_Y}	R _S = 50 Ω , C _Y = 50 pF			8.5	ns
Fall Time	t _{F_Y}	R _S = 50 Ω , C _Y = 50 pF			8.5	ns
Rise Time	t _{R_A}	R _S = 50 Ω , C _A = 15 pF			8.5	ns
Fall Time	t _{F_A}	R _S = 50 Ω , C _A = 15 pF			8.5	ns
Maximum Data Rate		R _S = 50 Ω , C _Y = 50 pF, C _A = 15 pF	40			Mbps
Channel To Channel Skew	t _{SKEW}	R _S = 50 Ω , C _Y = 50 pF, C _A = 15 pF			10	ns
POWER REQUIREMENTS						
Power Supply Voltages	V _{CCY}		1.65		5.5	V
	V _{CCA}		1.1		5.5	V
Quiescent Power Supply Current	I _{CCY}	Digital Inputs = 0 V or V _{CCY}			5	μ A
	I _{CCA}	Digital Inputs = 0 V or V _{CCA}			5	μ A

NOTES

¹Temperature range is as follows: B Version: -40°C to +85°C.²All typical vlaues are at T_A = +25°C unless otherwise stated.³Guaranteed by design, not subject to production test.

Specifications subject to change without notice.

ABSOLUTE MAXIMUM RATINGS¹

(T_A = 25°C unless otherwise noted)

V_{CCY} to GND -0.3 V to +7 V

V_{CCA} to GND -0.3 V to +7 V

Digital Inputs (A) -0.3 V to (V_{CCA} + 0.3V)

Digital Inputs (Y) -0.3 V to (V_{CCY} + 0.3V)

EN to GND -0.3 V to +7 V

Operating Temperature Range

Industrial (B Version) -40°C to +85°C

Storage Temperature Range -65°C to +150°C

Junction Temperature 150°C

14 Lead TSSOP

θ_{JA} Thermal Impedance 150°C/W


Lead Temperature, Soldering (10seconds) 300°C

IR Reflow, Peak Temperature (<20 seconds) ... +235°C


NOTES

¹Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those listed in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Only one absolute maximum rating may be applied at any one time.

Pin Configuration 14 Lead TSSOP (RU-14)



12 Lead WLCSP (CB-12)



ORDERING GUIDE

Model	Temperature Range	Package Description	Package Option
ADG3304BRU	-40°C to +85°C	TSSOP	RU-14
ADG3304BCB	-40°C to +85°C	WLCSP	CB-12


CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although the ADG3304 features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



The ADG3304 level translator allows the required level shifting necessary for data transfer in a system where multiple voltages are used. The device requires two supplies, V_{CCA} and V_{CCY} . These supplies set the logic levels on each side of the device. The device translates data present on the V_A side of the device to the higher voltage level at the V_Y side of the device. Similarly, as the device is capable of bidirectional translation, data applied to the V_Y side will be translated to the voltage referenced to V_A .

The forward channel consists of a string of inverters and a level translator, while the reverse channel consists simply of inverters. A level translator is not required in the reverse path (Y-A) as the supply voltage V_{CCY} must always be greater than or equal to V_{CCA} . A current limiting resistor is used in series with each channel to prevent any contention issues, see figure 1.

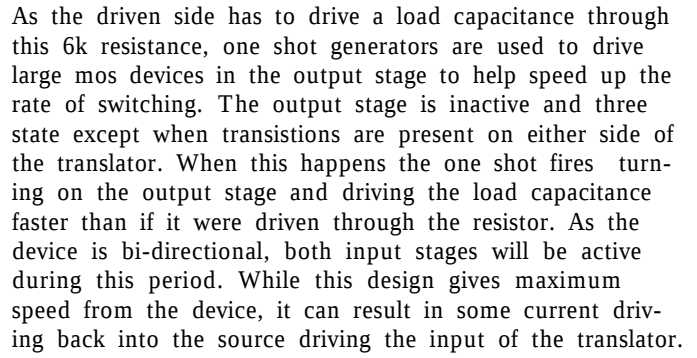

Enable Operation


When pulled low, the EN input allows the user to tri-state both sides (A and Y) of the level translator. EN pin is referred to V_{CCA} voltage.

-4-


OUTLINE DIMENSIONS

Dimensions shown in inches and (mm).

14-Lead TSSOP (RU-14)

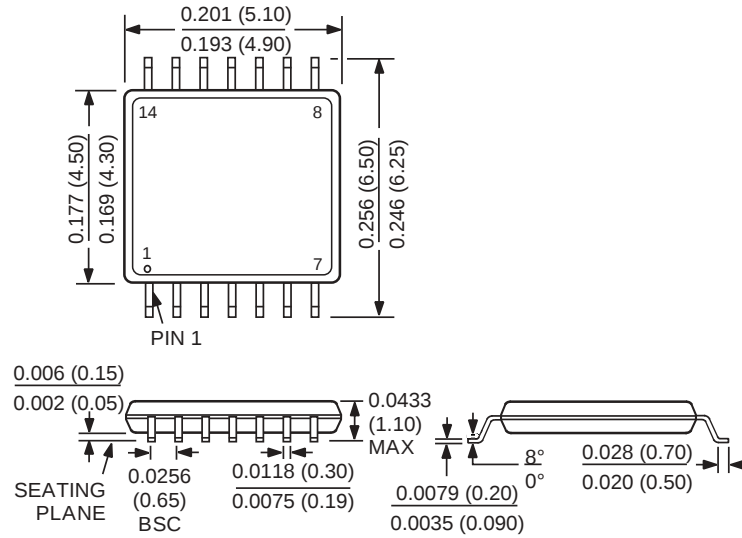

12-Lead WLCSP (CB-12)

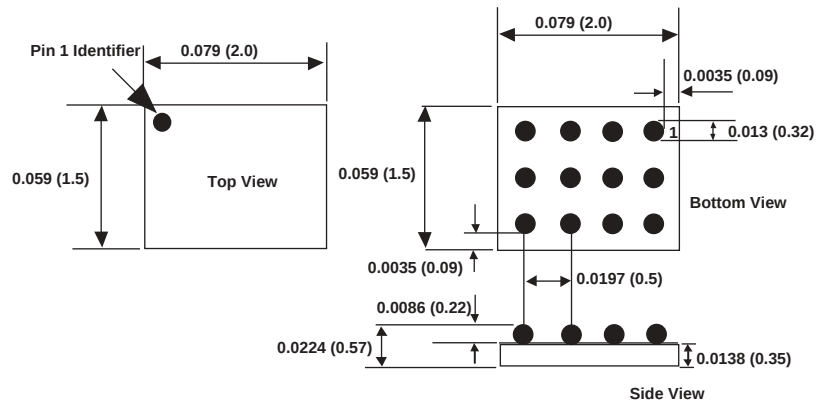



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.