

**Features**

- 0603 Outline
- Surface Mount
- 15 μm I-Region Length Devices
- No Wirebonds Required
- Silicon Nitride Passivation
- Polymer Scratch Protection
- Low Parasitic Capacitance and Inductance
- High Average and Peak Power Handling

**Description**

This device is a silicon, glass PIN diode surmount chip fabricated with a MACOM patented HMIC™ process. This device features two silicon pedestals embedded in a low loss, low dispersion glass. The diode is formed on the top of one pedestal and connections to the backside of the device are facilitated by making the pedestal sidewalls electrically conductive. Selective backside metallization is applied producing a surface mount device. This vertical topology provides for exceptional heat transfer. The topside is fully encapsulated with silicon nitride and has an additional polymer layer for scratch and impact protection. These protective coatings prevent damage to the junction and the anode air-bridge during handling and assembly.

**Applications**

These packageless devices are suitable for usage in moderate incident power, ≤50 dBm/C.W. or where the peak power is ≤75 dBm, pulse width is ≤1 μs, and duty cycle is ≤0.01%. Their low parasitic inductance, 0.4 nH, and excellent RC constant, make these devices a superior choice for higher frequency switch elements when compared to their plastic package counterparts.

**Ordering Information**

| Part Number        | Package            |
|--------------------|--------------------|
| MADP-017015-13140G | 100 piece gel pack |
| MADP-017015-13140P | 3000 piece reel    |
| MADP-030015-13140G | 100 piece gel pack |
| MADP-030015-13140P | 3000 piece reel    |

**Case Style ODS 1314**



**Chip Dimensions<sup>1,2,3</sup>**

| DIM. | INCHES |       | MM    |       |
|------|--------|-------|-------|-------|
|      | Min.   | Max.  | Min.  | Max.  |
| A    | 0.060  | 0.061 | 1.535 | 1.55  |
| B    | 0.031  | 0.032 | 0.785 | 0.800 |
| C    | 0.004  | 0.005 | 0.115 | 0.135 |
| D    | 0.019  | 0.021 | 0.475 | 0.525 |
| E    | 0.019  | 0.021 | 0.475 | 0.525 |
| F    | 0.019  | 0.021 | 0.475 | 0.525 |
| G    | 0.029  | 0.031 | 0.725 | 0.775 |

1. Backside metal: 0.1microns thick.
2. Yellow area with hatch lines indicate backside ohmic gold contacts.
3. Both devices have same outline dimensions ( A to G).

\* Restrictions on Hazardous Substances, compliant to current RoHS EU directive.

**Electrical Specifications @ T<sub>A</sub> = 25°C (unless otherwise noted)**

| Parameter                                 | Conditions  | Units | MADP-017015 |              |          | MADP-030015 |              |           |
|---|---|-------|-------------|--------------|----------|-------------|--------------|-----------|
|   |   |       | Min.        | Typ.         | Max.     | Min.        | Typ.         | Max.      |
| Capacitance (C <sub>T</sub> )             | -40 V, 1 MHz <sup>4,6</sup><br>-40V, 1 GHz <sup>4,6</sup>               | pF    | —           | 0.32<br>0.31 | 0.3<br>— | —           | 0.79<br>0.78 | 0.85<br>— |
| Capacitance (C <sub>T</sub> ) @ 85°C      | -40 V, 1 GHz <sup>4,6</sup>   | pF    | —           | 0.29         | —        | —           | 0.76         | —         |
| Resistance (R <sub>S</sub> )              | +10 mA, 1 GHz <sup>5,6</sup><br>+70 mA, 1 GHz <sup>5,6</sup>            | Ω     | —           | 0.72<br>0.51 | —        | —           | 0.49<br>0.38 | —         |
| Resistance (R <sub>S</sub> ) @ 85°C       | +10 mA, 1 GHz <sup>5,6</sup><br>+70 mA, 1 GHz <sup>5,6</sup>            | Ω     | —           | 1.08<br>0.84 | —        | —           | 0.82<br>0.69 | —         |
| Forward Voltage (V <sub>F</sub> )         | +10 mA  | V     | —           | 0.74         | 0.90     | —           | 0.72         | 0.90      |
| Reverse Leakage Current (I <sub>R</sub> ) | -115 V  | A     | —           | —            | 10       | —           | —            | 10        |
| Third Order Intercept Point (IP3)         | F1= 1800 MHz<br>F2 = 1810 MHz<br>Input Power = 0 dBm<br>I bias = +70 mA | dBc   | —           | -36.8        | —        | —           | -37.0        | —         |
| Thermal Resistance <sup>7</sup> (θ)       | —   | °C/W  | —           | 30           | —        | —           | 13           | —         |
| Lifetime (T <sub>L</sub> )                | +10 mA / -6 mA<br>(50% - 90% V)   | μs    | —           | 1.3          | —        | —           | 1.6          | —         |

4. Total capacitance, C<sub>T</sub>, is equivalent to the sum of Junction Capacitance, C<sub>J</sub>, and Parasitic Capacitance, C<sub>par</sub>.

5. Series resistance R<sub>S</sub> is equivalent to the total diode resistance : R<sub>s</sub> = R<sub>j</sub> ( Junction Resistance) + R<sub>c</sub> ( Ohmic Resistance).

6. R<sub>s</sub> and C<sub>T</sub> are measured on an HP4291A Impedance Analyzer with the die mounted in an ODS-186 package.

7. Theta (θ) is measured with the die mounted in an ODS-186 package.

**Typical Spice Parameters @ T<sub>A</sub> = +25°C**

| Spice Parameter  | N   | RS  | IS      | IK   | BV      | IBV  | Ct   | CJO  | VJ      | M    | FC   | Cpar_Cj |
|------------------|-----|-----|---------|------|---------|------|------|------|---------|------|------|---------|
| Units            | -   | W   | A       | (mA) | (Volts) | (mA) | (pF) | (pF) | (Volts) | -    | -    | (F)     |
| MADP-017015-1314 | 1.1 | 1.2 | 9.8E-15 | 14.7 | 145     | 10   | 0.46 | 0.10 | 0.29    | 0.50 | 0.34 | 3.5E-13 |
| MADP-030015-1314 | 1.1 | 1.1 | 8.5E-15 | 13.9 | 145     | 10   | 1.12 | 0.29 | 0.18    | 0.50 | 0.19 | 8.2E-13 |

**Absolute Maximum Ratings<sup>8</sup> @ T<sub>A</sub> = +25°C (unless otherwise specified)**

| Parameter             | Absolute Maximum      |
|-----------------------|-----------------------|
| Forward Current       | 500 mA                |
| Reverse Voltage       | -115 V                |
| Operating Temperature | -55°C to +125°C       |
| Storage Temperature   | -55 °C to +150°C      |
| Junction Temperature  | +175°C                |
| C.W. Incident Power   | 50 dBm                |
| Mounting Temperature  | +280°C for 30 seconds |

8. Exceeding these limits may cause in permanent damage.

## Handling Procedures

All semiconductor chips should be handled with care to avoid damage or contamination from perspiration and skin oils. The use of plastic tipped tweezers or vacuum pickups is strongly recommended for individual components. Bulk handling should insure that abrasion and mechanical shock are minimized.

## Bonding Techniques

Attachment to a circuit board is made simple through the use of surface mount technology. Mounting pads are conveniently located on the bottom surface of these devices and are removed from the active junction locations. These devices are well suited for solder attachment onto hard and soft substrates. The use of 80Au/20Sn, or RoHS compliant solders is recommended. For applications where the average power is ~1W, conductive silver epoxy may also be used. Cure per manufacturers recommended time and temperature. Typically 1 hour at 150°C.

When soldering these devices to a hard substrate, hot gas die bonding is preferred. A vacuum tip pick-up tool and a force of 60 to100 grams applied to the top surface of the device is recommended. When soldering to soft substrates, such as Duroid, it is recommended to use a soft solder at the circuit board to mounting pad interface. Position the die so that its mounting pads are aligned with the circuit board mounting pads. While applying a downward force perpendicular to the top surface of the die, apply heat near the circuit trace and diode mounting pad. The solder connection to the two pads should not be made one at a time as this will create unequal heat flow and thermal stress to the part. Solder reflow should not be performed by causing heat to flow through the top surface of the die to the back. Since the HMIC glass is transparent, the edges of the mounting pads can be visually inspected through the die after attachment is completed.

Typical re-flow profiles for Sn60/Pb40 and RoHS compliant solders is provided in Application Note M538, "Surface Mounting Instructions" and can viewed on the MACOM website @ [www.macom.com](http://www.macom.com)

Typical Performance @ T<sub>A</sub> = +25°C

C<sub>t</sub> vs. V



R<sub>s</sub> vs. I




C<sub>t</sub> vs. Freq.




L<sub>s</sub> vs. Freq.



R<sub>s</sub> vs. Freq.

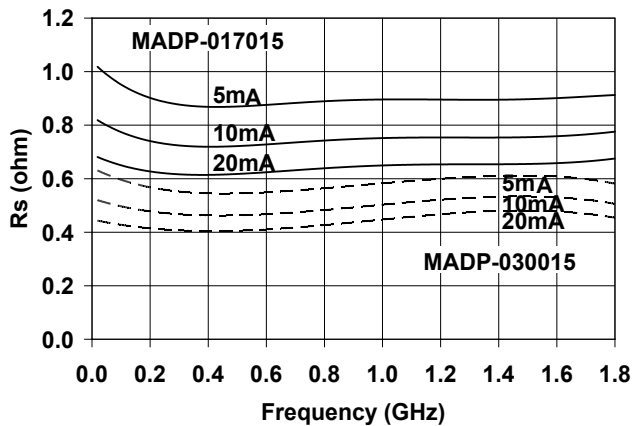

L<sub>s</sub> vs. I

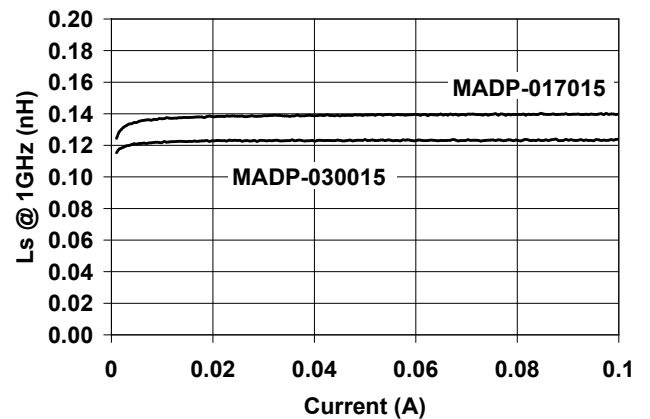

**MADP-017015-1314**

**MADP-030015-1314**



**SURMOUNT™ 15 µm PIN Diodes**  
**RoHS Compliant**

Rev. V8

MACOM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with MACOM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.