



Two Pin Ceramic Switching Diode

Qualified per MIL-PRF-19500/116

DESCRIPTION

This 1N4148UB2 switching/signal diode features ceramic body construction for military grade products per MIL-PRF-19500/116. This small low capacitance diode, with very fast switching speeds, is featured in a surface mount UB2 package and is available in different polarities. Microsemi also offers a variety of other switching/signal diodes.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- Surface mount equivalent of popular JEDEC registered 1N4148 number.
- Very low capacitance.
- Very fast switching speeds with minimal reverse recovery times.
- Standard and reverse polarities are available.
- JAN, JANTX, and JANTXV qualification is available per MIL-PRF-19500/116.
(See [part nomenclature](#) for all available options.)
- RoHS compliant by design.

APPLICATIONS / BENEFITS



- High frequency data lines.
- Low-profile ceramic surface mount package (see package illustration).
- RS-232 & RS-422 interface networks.
- Ethernet 10 Base T.
- LAN.
- Computers.

MAXIMUM RATINGS @ 25 °C

Parameters/Test Conditions	Symbol	Value	Unit
Junction and Storage Temperature	T_J & T_{STG}	-65 to +200	°C
Thermal Resistance Junction-to-Ambient ⁽¹⁾	$R_{\theta JA}$	325	°C/W
Thermal Resistance Junction-to-Solder Pad ⁽¹⁾	$R_{\theta JSP}$	120	°C/W
Maximum Breakdown Voltage	$V_{(BR)}$	100	V
Working Peak Reverse Voltage	V_{RWM}	75	V
Average Rectified Current @ $T_A = 75$ °C ⁽²⁾	I_O	200	mA
Non-Repetitive Sinusoidal Surge Current (tp = 8.3 ms)	I_{FSM}	2	A (pk)

NOTES: 1. See [Figure 2](#) for thermal impedance curves.
2. See [Figure 1](#) for derating.

Qualified Levels:
JAN, JANTX, and
JANTXV



UB2 Package

Also available in:

UBC package
(Ceramic Lid surface mount)
 [1N4148UBC](#)

UB package
(surface mount)
 [1N4148UB](#)

DO-35 package
(axial-leaded)
 [1N4148-1](#)

DO-213AA package
(MELF surface mount)
 [1N4148UR-1](#)

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
Tel: 1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland


Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Ceramic.
- TERMINALS: Gold plating over nickel underplate.
- MARKING: Part number, date code, manufacturer's ID.
- TAPE & REEL option: Standard per EIA-418D. Consult factory for quantities.
- WEIGHT: < 0.04 Grams.
- See [Package Dimensions](#) on last page.

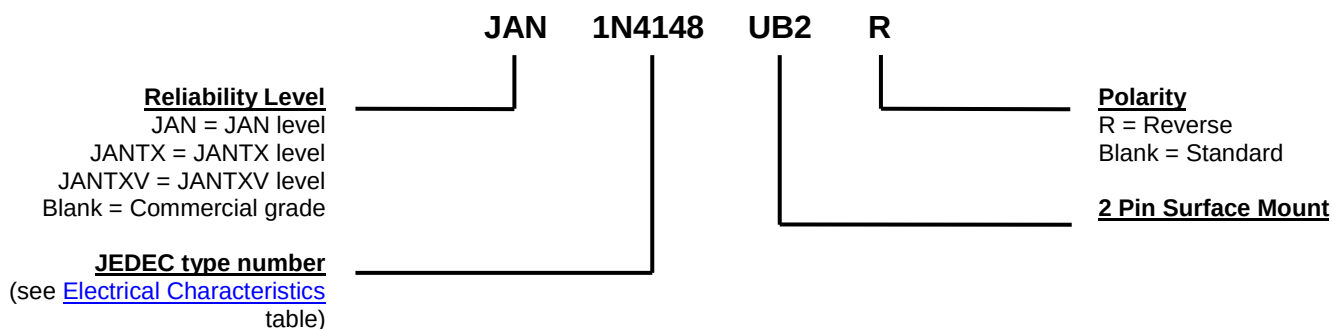PART NOMENCLATURE

SYMBOLS & DEFINITIONS

Symbol	Definition
I_R	Reverse Current: The maximum reverse (leakage) current that will flow at the specified voltage and temperature.
I_o	Average Rectified Forward Current: The output current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle.
t_{rr}	Reverse Recovery Time: The time interval between the instant the current passes through zero when changing from the forward direction to the reverse direction and a specified decay point after a peak reverse current occurs.
V_F	Forward Voltage: The forward voltage the device will exhibit at a specified current (typically shown as maximum value).
V_R	Reverse Voltage: The reverse voltage dc value, no alternating component.
V_{RWM}	Working Peak Reverse Voltage: The maximum peak voltage that can be applied over the operating temperature range excluding all transient voltages (ref JESD282-B). Also sometimes known as PIV.

ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise noted

FORWARD VOLTAGE V_{F1} @ $I_F=10mA$	FORWARD VOLTAGE V_{F2} @ $I_F=100mA$	REVERSE RECOVERY TIME t_{rr} (Note 1)	FORWARD RECOVERY TIME t_{fr} (Note 2)	REVERSE CURRENT I_{R1} @ 20 V	REVERSE CURRENT I_{R2} @ 75 V	REVERSE CURRENT I_{R3} @ 20 V $T_A=150^{\circ}C$	REVERSE CURRENT I_{R4} @ 75 V $T_A=150^{\circ}C$	CAPACITANCE C (Note 3)	CAPACITANCE C (Note 4)
V	V	ns	ns	nA	μA	μA	μA	pF	pF
0.8	1.2	5	20	25	0.5	35	75	4.0	2.8

NOTE 1: $I_F = I_R = 10$ mA, $R_L = 100$ Ohms ± 5 %.

NOTE 2: $I_F = 50$ mA.

NOTE 3: $V_R = 0$ V, $f = 1$ MHz, $V_{SIG} = 50$ mV (pk to pk).

NOTE 4: $V_R = 1.5$ V, $f = 1$ MHz, $V_{SIG} = 50$ mV (pk to pk).

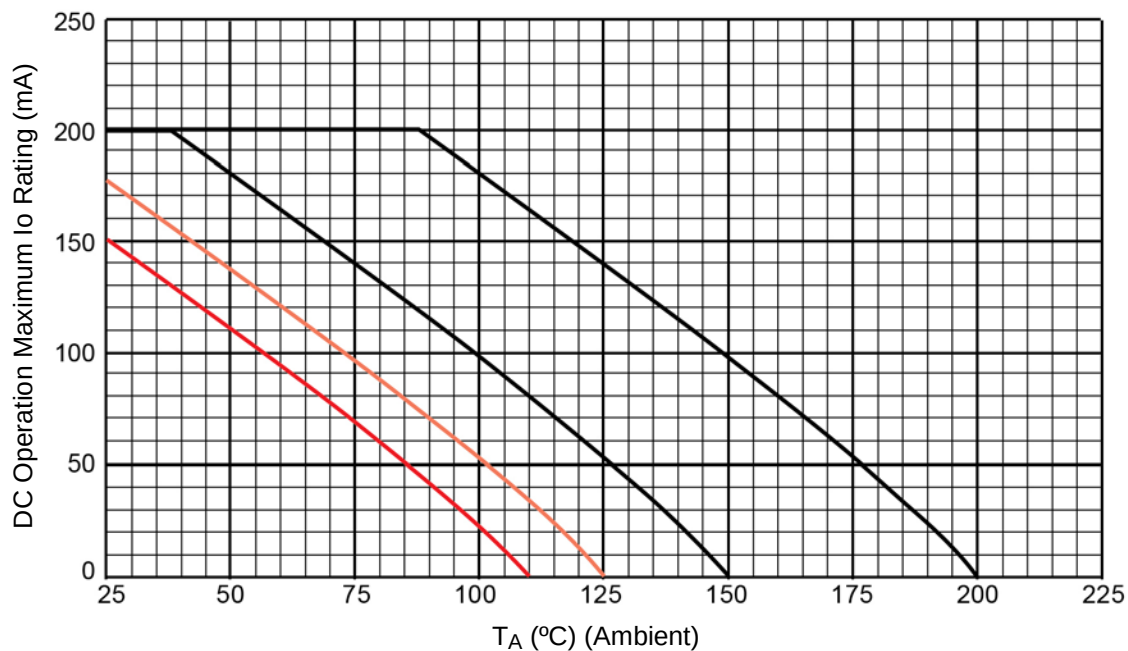
GRAPHS


FIGURE 1 – Temperature – Current Derating

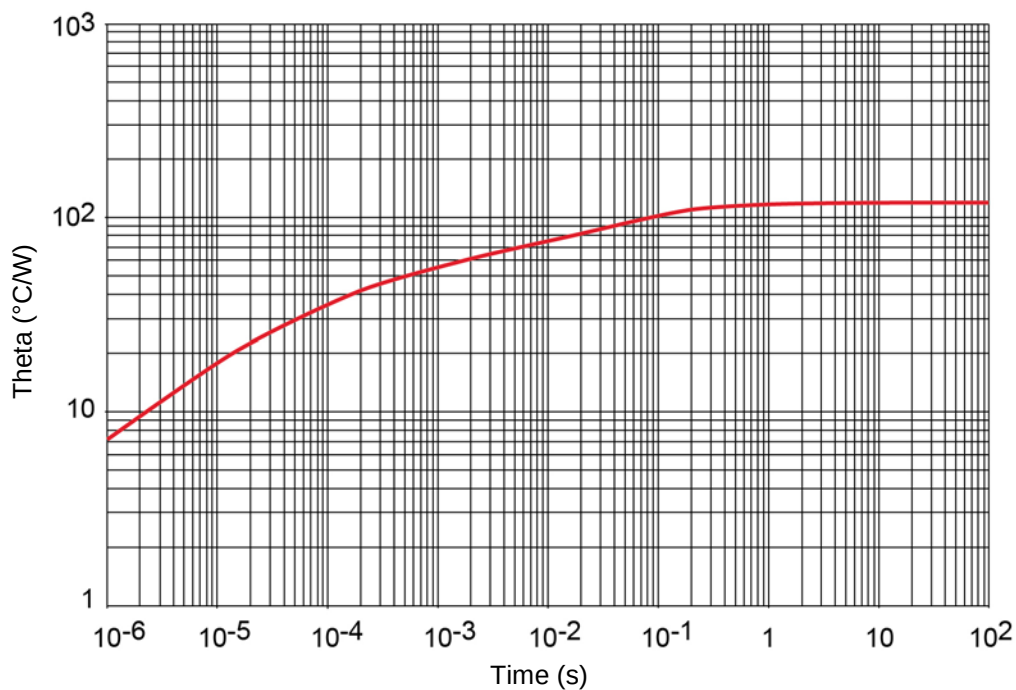
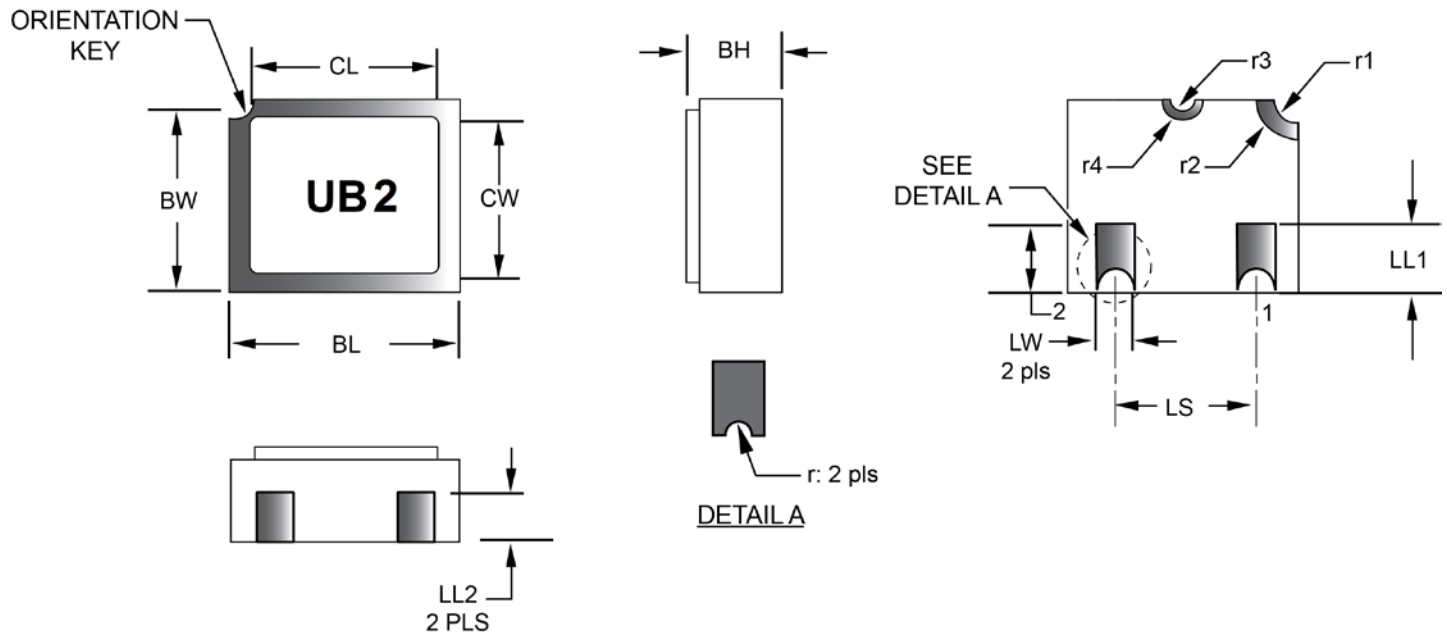


FIGURE 2 – Thermal Impedance

PACKAGE DIMENSIONS


Symbol	Dimensions				Note	Symbol	Dimensions				Note
	inch		millimeters				inch		millimeters		
	Min	Max	Min	Max			Min	Max	Min	Max	
BH	.046	.056	1.17	1.42		LS	.071	.079	1.80	2.01	
BL	.115	.128	2.92	3.25		LW	.016	.024	0.41	0.61	
BW	.085	.108	2.16	2.74		r	.008 TYP		0.20 TYP		
CL		.128		3.25		r1	.012 TYP		0.31 TYP		
CW		.108		2.74		r2	.022 TYP		.056 TYP		
LL1	.022	.038	0.56	0.96		r3	.008 TYP		0.20 TYP		
LL2	.017	.035	0.43	0.89		r4	.012 TYP		0.31 TYP		

NOTES:

1. Dimensions are in inches. Millimeters are given for general information only.
2. Ceramic package only.
3. Hatched areas on package denote metallized areas. Pad 4 = Shielding connected to the lid.
4. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.

1 —▶— 2 **1N4148UB2**

1 —◀— 2 **1N4148UB2R**

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[JAN1N4148UB2/TR](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.