

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1128

2.25MHZ DUAL-OUTPUT, 600MA, MONOLITHIC STEP-DOWN DC/DC REGULATOR

LTC3419EDD

DESCRIPTION

Demonstration circuit 1128A is a Dual channel Synchronous, 2.25MHz Step-Down DC/DC Regulator featuring the LTC3419. The DC1128A has an input voltage range of 2.5V to 5.5V. Both jumper selectable 3.3V/2.5V and 1.2V/1.5V/1.8V output are capable of delivering up to 600mA of output current. In Burst Mode™ operation, the LTC3419 requires only 40uA of quiescent current. As a result, the DC1128A provides good efficiency at light load currents. In Pulse Skip mode, the DC1128A provides lower output ripple voltage at light load currents than in Burst Mode. In either mode, the DC1128A can provide up to 95% efficiency and consumes less than 1uA in shutdown.

The LTC3419 comes in a small 10-Pin DFN package, which has an exposed pad on the bottom-side of the IC for good thermal performance. These features, plus the nominal operating frequency of 2.25MHz (allowing the exclusive use of low profile surface mount components), make the DC1128A demo board an ideal reference circuit for battery-powered, hand-held applications.

Design files for this circuit board are available. Call the LTC factory.

LTC is a trademark of Linear Technology Corporation

Table 1. Performance Summary ($T_A = 25^\circ\text{C}$)

PARAMETER	CONDITION	VALUE
Minimum Input Voltage		2.5V
Maximum Input Voltage		5.5V
Output Voltage V _{OUT1}	V _{IN} = 2.5V to 5.5V, I _{OUT1} = 0A to 600mA	1.2V \pm 2% 1.5V \pm 2% 1.8V \pm 2%
Typical Output Ripple V _{OUT1}	V _{IN} = 5V, I _{OUT1} = 600mA (20MHz BW)	20mV _{P-P}
Output Regulation	Line	\pm 1%
	Load	\pm 1%
Output Voltage V _{OUT2}	V _{IN} = 2.5V to 5.5V, I _{OUT2} = 0A to 600mA	3.3V \pm 2% 2.5V \pm 2%
Typical Output Ripple V _{OUT2}	V _{IN} = 5V, I _{OUT2} = 600mA (20MHz BW)	20mV _{P-P}
Output Regulation	Line	\pm 1%
	Load	\pm 1%
Nominal Switching Frequency		2.25MHz

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1128

2.25MHZ DUAL-OUTPUT, 600MA, MONOLITHIC STEP-DOWN DC/DC REGULATOR

QUICK START PROCEDURE

Demonstration circuit 1128 is easy to set up to evaluate the performance of the LTC3419. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below.

Note: When measuring the input or output voltage ripple, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the input or output voltage ripple by touching the probe tip directly across the Vin or Vout and GND terminals. See Figure 2 for proper scope probe technique.

1. Connect the input power supply to the Vin and GND terminals on the left-side of the board. Connect the loads between the Vout and GND terminals on the right-side of the board. Refer to Figure 1 for the proper measurement equipment setup.
2. Before proceeding to operation, insert jumpers JP1 and JP2 into the OFF positions, jumper JP3 into the Vout1 voltage position of choice (1.2V, 1.5V, and 1.8V), and jumper JP4 into the desired mode of operation: Pulse Skip or Burst Mode.
3. Apply 4.0V at Vin. Measure both Vouts; they should read 0V. The supply current will be less than 1uA in shutdown mode.
4. Select Vout2 of 3.3V/2.5V by place **one** jumper at JP8 or JP7.
5. Select Vout1 of 1.8V/1.5V/1.2V by place **one** jumper at JP6 or JP5 or JP4.

6. Turn on Vout1 and Vout2 by changing jumpers JP1 and JP2 from the OFF position(s) to the ON position(s). The burst mode input current should be less than 115uA* in burst mode when input is at 4.0V. Vary the input voltage from 3.5V to 5.5V and adjust each load current from 0 to full load. Both output voltages should be regulating. The regulated error is less than 2% of rated voltage.
7. Set the load current of outputs between 25% to 100% load range, and measure both output ripple voltages; they should measure less than 20mV each. The switching frequencies should be between 1.8MHz and 2.7MHz ($T = 0.555 \text{ us}$ and 0.37 us)
8. Change Vout1 and Vout2 to other desired values. Repeat 6-7.
9. Set the jumper to default position after test:

JP3	JP2	JP1	JP8 (3.3V)	JP6 (1.8V)
Burst Mode	ON	ON	Vout2	Vout1

*Note: The 115uA is due to default load on sensing resistor. Using larger resistor value for voltage divider if less current is desired.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1128

2.25MHZ DUAL-OUTPUT, 600MA, MONOLITHIC STEP-DOWN DC/DC REGULATOR

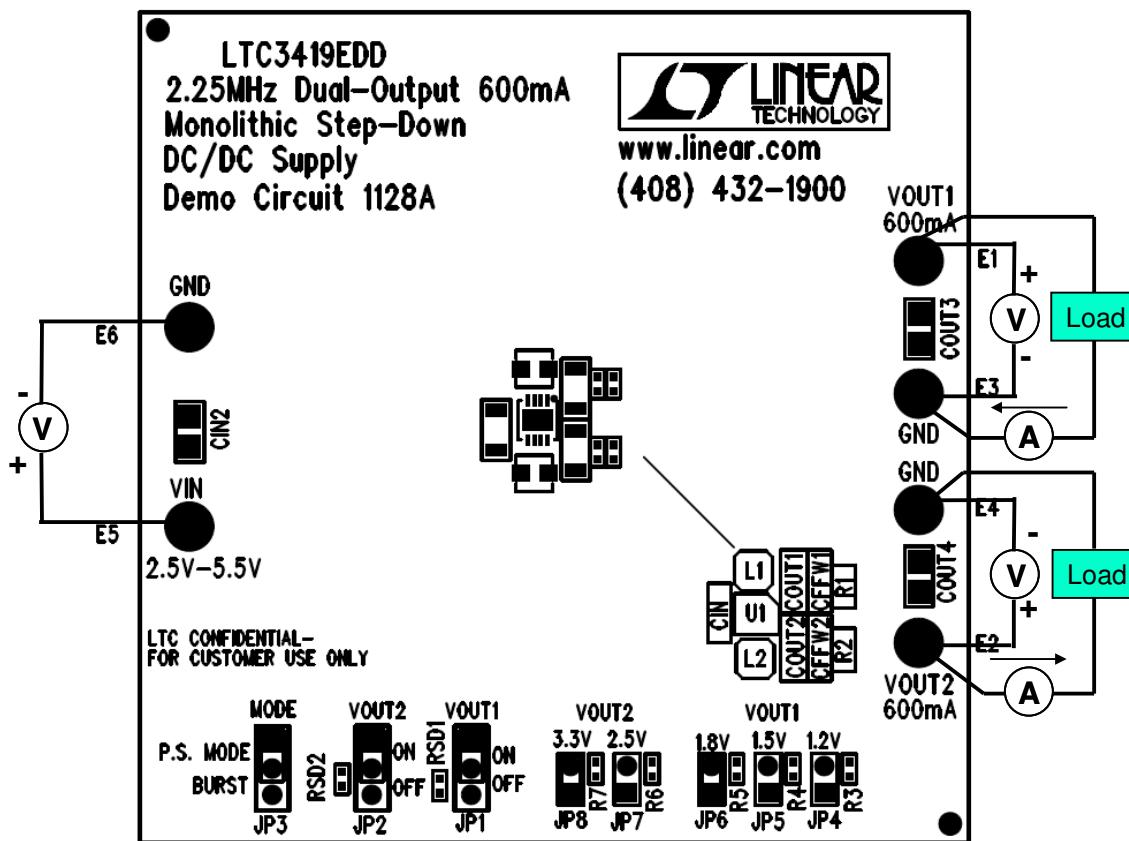


Figure 1. Proper Measurement Equipment Setup


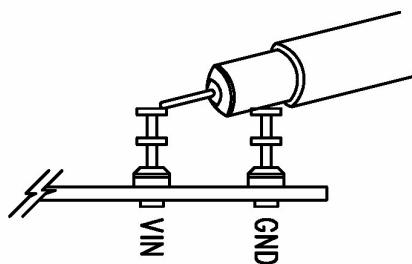


Figure 2. Scope Probe Placement for Measuring Input or Output Ripple

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 1128

2.25MHz DUAL-OUTPUT, 600mA, MONOLITHIC STEP-DOWN DC/DC REGULATOR

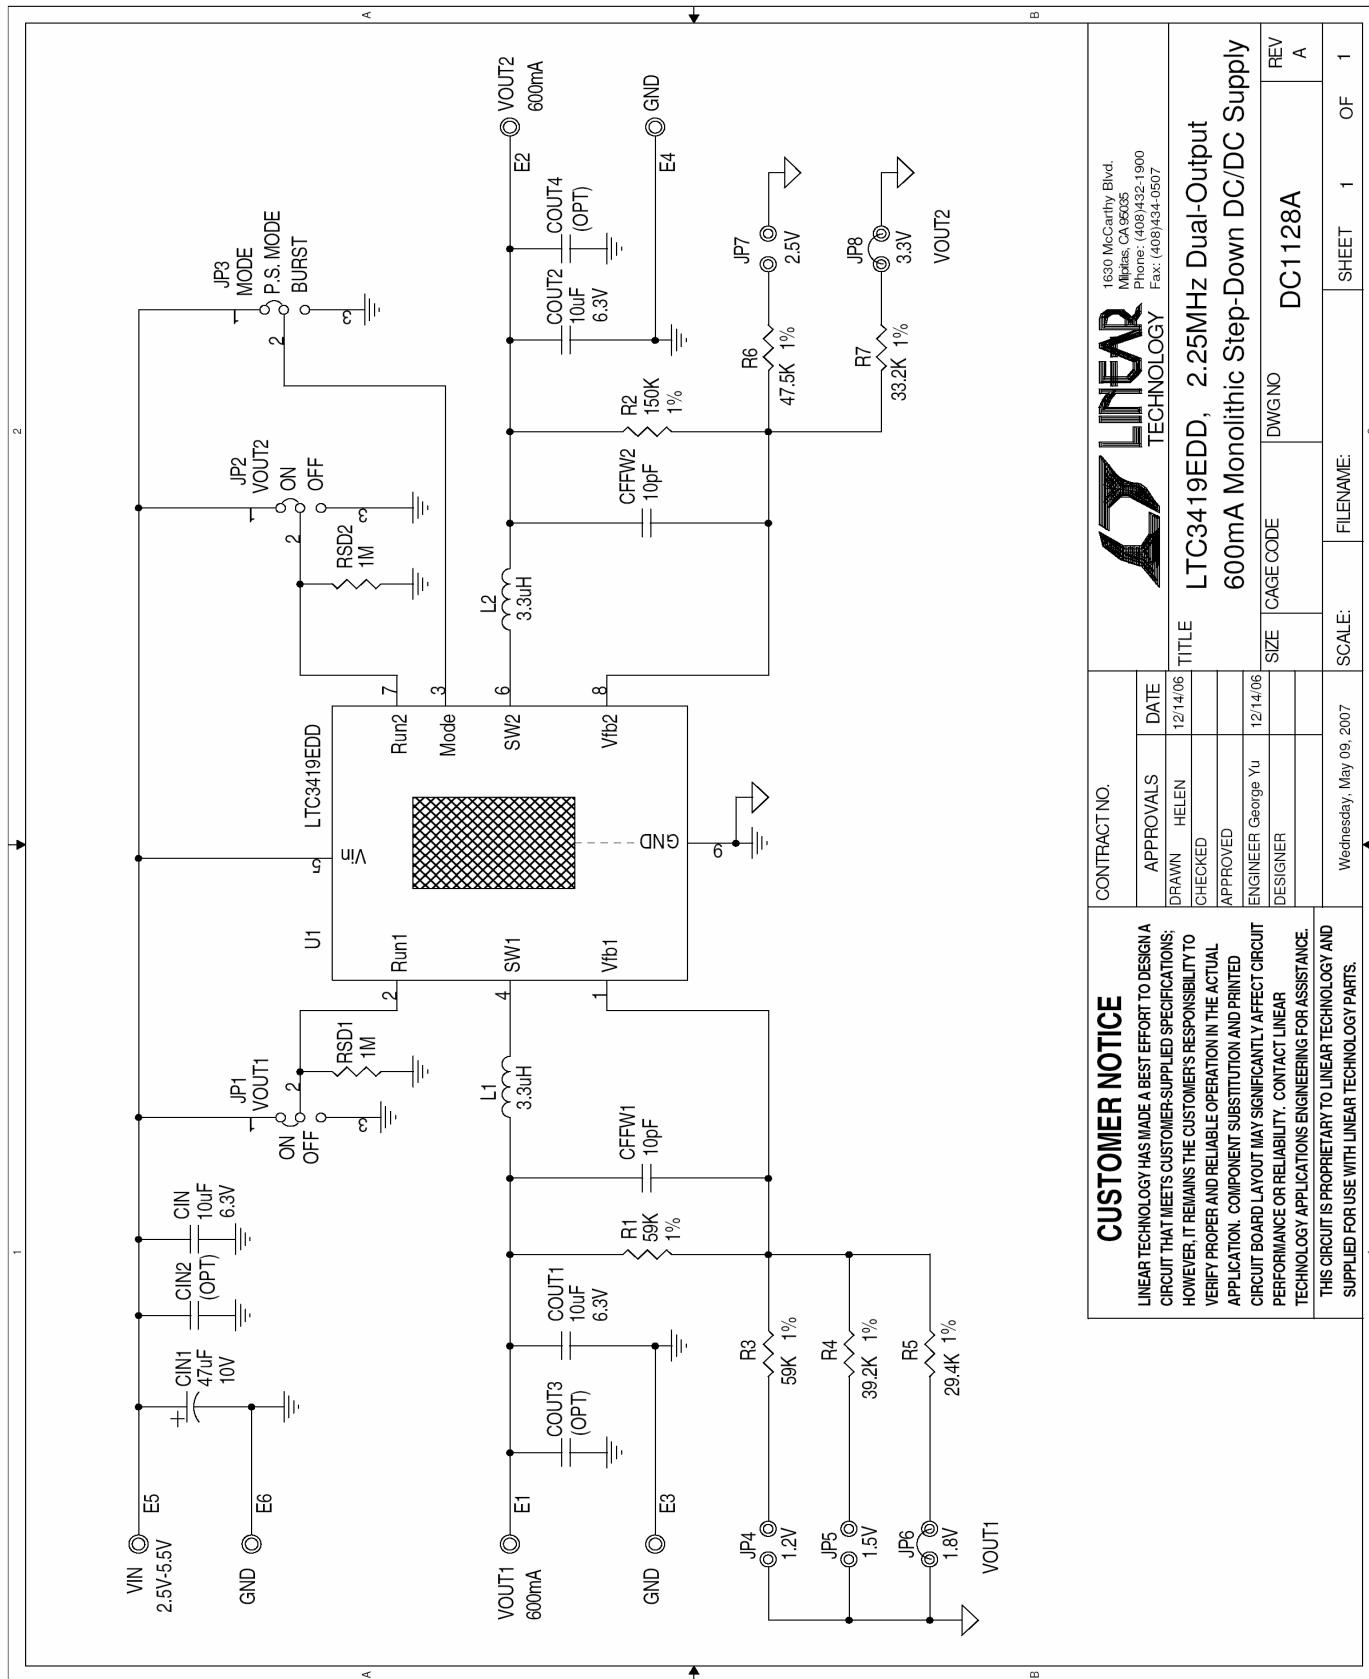

CUSTOMER NOTICE

LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS; HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL APPLICATION. COMPONENT SUBSTITUTION AND PRINTED CIRCUIT BOARD LAYOUT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE.

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

1630 McCarthy Blvd.
Milpitas, CA 95035
Phone: (408)432-1900
Fax: (408)434-0507

TECHNOLOGY

LTC3419EDD, 2.25MHz Dual-Output
600mA Monolithic Step-Down DC/DC Supply

CONTRACT NO.	APPROVALS	DATE
DRAWN HELEN	12/14/06	
CHECKED		
APPROVED		
ENGINEER George Yu	12/14/06	
DESIGNER		
Wednesday, May 09, 2007	SHEET 1 OF 1	REV A
SCALE:	FILENAME:	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.