

High Power GaAs SPDT Switch DC - 2.0 GHz

Rev. V3

Features

- Positive Supply and Control Voltages
- 1 dB Compression Point: +36 dBm Typical, 8 V
- 3rd Order Intercept Point: +65 dBm Typical, 8 V
- Low Insertion Loss: 0.4 dB Typical
- Low Power Consumption: 100 μ W
- Fast Switching Speed
- Lead-Free SOIC-8 Plastic Package
- 100% Matte Tin Plating over Copper
- Halogen-Free "Green" Mold Compound
- 260°C Re-flow Compatible
- RoHS* Compliant Version of SW-277

Description

M/A-COM's MASWSS0161 is a GaAs MMIC SPDT switch in a lead free SOIC-8 lead surface mount plastic package. The MASWSS0161 is ideally suited for use where low power consumption is required. Typical applications include transmit/receive switching, switch matrices and switched filter banks in systems such as radio and cellular equipment, PCM, GPS, fiber optic modules, and other battery powered radio equipment.

The MASWSS0161 is fabricated using a monolithic GaAs MMIC using a mature 1 micron process. The process features full chip passivation for increased performance and reliability.

Ordering Information ¹

Part Number	Package
MASWSS0161	Bulk Packaging
MASWSS0161TR	1000 piece reel


1. Reference Application Note M513 for reel size information.

Truth Table ²

Control Inputs		Condition of Switch RF Common to Each RF Port	
A	B	RF1	RF2
1	0	Off	On
0	1	On	Off

2. "0" = 0 to +0.2 V @ 20 mA maximum.
"1" = +5 V @ 20 mA typical to 10 V @ 500 mA maximum.

Functional Schematic

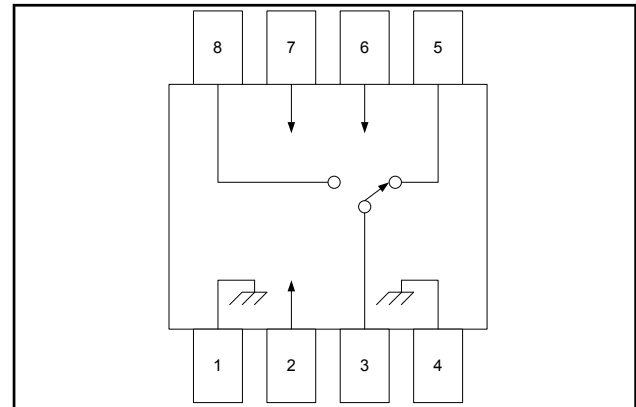

Pin Configuration

Pin No.	Description	Pin No.	Description
1	Ground, Thermal Contact	5	RF Port 1 ³
2	V _{DD}	6	Control A
3	RFC ³	7	Control B
4	Ground, Thermal Contact	8	RF Port 2 ³

3. External DC blocking capacitors required on all RF ports.

Absolute Maximum Ratings ^{4,5}

Parameter	Absolute Maximum
Input Power - 0.5 - 2.0 GHz 5 V Control and Supply 8 V Control and Supply 10 V Control and Supply	+37 dBm +40 dBm +42 dBm
Power Dissipation	1.0 W
Supply Voltage	-1 V $\leq$ V _{DD} $\leq$ +12 V
Control Voltage	-1 V $\leq$ V _C $\leq$ V _{DD} + 0.2 V
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
Thermal Resistance ⁶	θ_{jc} = 87°C/W

4. Exceeding any one or combination of these limits may cause permanent damage to this device.
5. M/A-COM does not recommend sustained operation near these survivability limits.
6. Thermal resistance is given for T_A = 25°C. T_{CASE} is the temperature of leads 1 and 4.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298
Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

High Power GaAs SPDT Switch DC - 2.0 GHz

Rev. V3


Electrical Specifications ⁷: $T_A = +25^\circ\text{C}$, $V_{DD} = +5\text{ V}$, $V_C = +5\text{ V} / 0\text{ V}$, $P_{IN} = +30\text{ dBm}$

Parameter	Test Conditions	Units	Min.	Typ. ⁸	Max.
Insertion Loss	DC - 0.5 GHz	dB	—	0.45	—
	0.5 - 1.0 GHz	dB	—	0.55	0.65
	1.0 - 2.0 GHz	dB	—	0.6	—
Isolation	DC - 0.5 GHz	dB	—	30	—
	0.5 - 1.0 GHz	dB	27	32	—
	1.0 - 2.0 GHz	dB	—	27	—
VSWR	DC - 2.0 GHz	Ratio	—	1.2:1	—
1 dB Compression	Input Power (5 V Supply/Control) 0.9 GHz	dBm	—	33	—
	Input Power (8 V Supply/Control) 0.9 GHz	dBm	—	35.8	—
Trise, Tfall	10% to 90% RF, 90% to 10% RF	nS	—	30	—
Ton, Toff	50% Control to 90% RF, 50% Control to 10% RF	nS	—	35	—
Transients	In-Band	mV	—	12	—
3rd Order Intercept	Measured Relative to Input Power, two-tone up to +10 dBm (5 V Supply/Control) 0.9 GHz	dBm	—	55	—
	(8 V Supply/Control) 0.9 GHz	dBm	—	65	—
Control Current	$V_C = +5\text{ V}$	μA	—	—	20
Supply Current	$V_{DD} = +5\text{ V}$	μA	—	—	60

7. All specifications apply when operated with control voltages of 0 V for VC low and 5 to 10 V for VC high, and 50 Ω impedance at all RF ports, unless otherwise specified. High power (greater than 1 W) handling specifications apply to cold switching only. For input powers under 1 W, hot switching can be used. The high control voltage must be within $\pm 0.2\text{ V}$ of the supply voltage. External DC blocking capacitors are required on all RF ports.

8. Typical values listed for middle of frequency range noted.

Lead-Free SOIC-8[†]

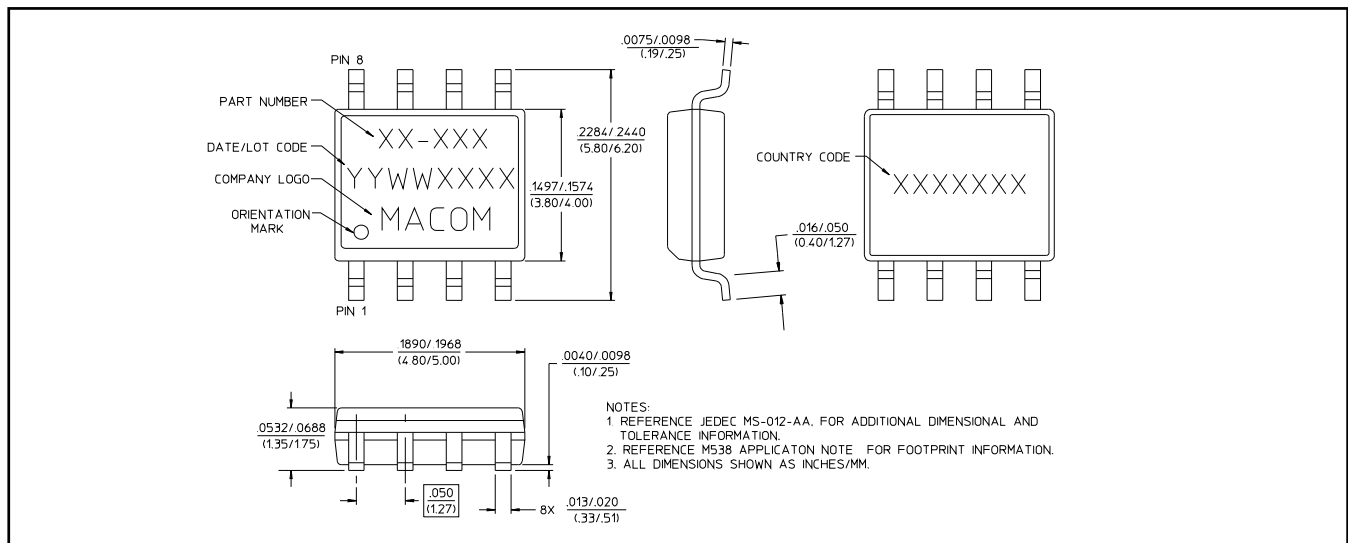

[†] Reference Application Note M538 for lead-free solder reflow recommendations.

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266

• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300

• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macomtech.com for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

High Power GaAs SPDT Switch DC - 2.0 GHz


Rev. V3

Typical Performance Curves


Insertion Loss

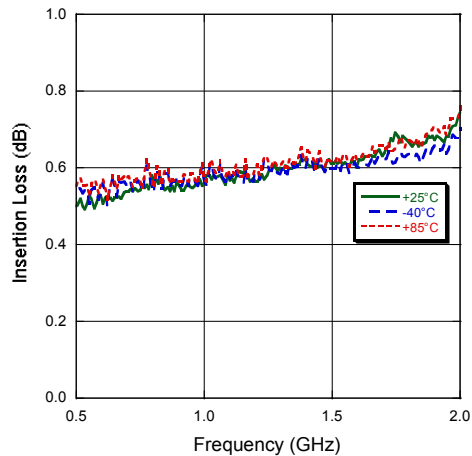


Isolation

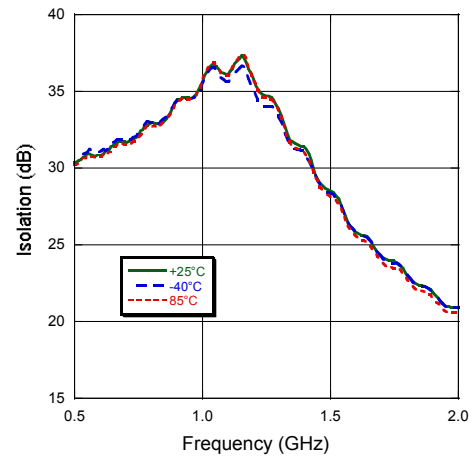

VSWR

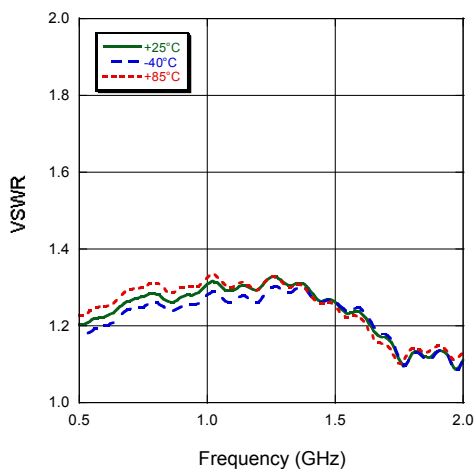

Compression vs. Control Voltage @ 900 MHz

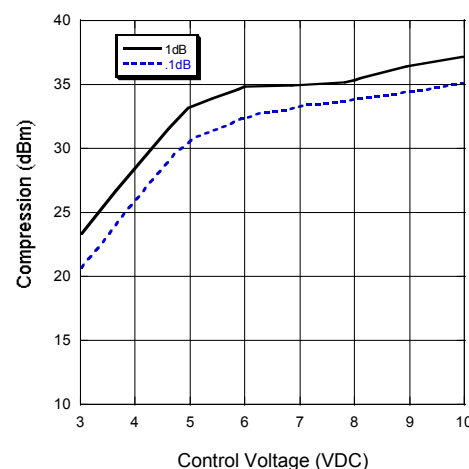

Handling Procedures

Please observe the following precautions to avoid damage:

Static Sensitivity

Gallium Arsenide Integrated Circuits are sensitive to electrostatic discharge (ESD) and can be damaged by static electricity. Proper ESD control techniques should be used when handling these devices.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.