


# Slot-type Photomicrosensor with Cable EE-SPX-W

**Photomicrosensor with built-in amplifier and attached cable reduces external light interference.**


- Light modulation effectively reduces external light interference.
- Wide operation voltage range: 5 to 24 VDC
- Easy operation monitoring with bright light indicator.

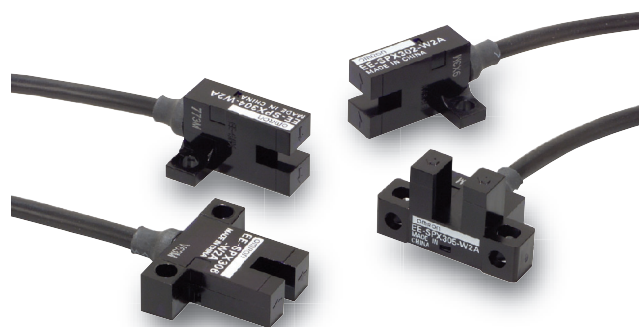

 Refer to *Precautions* on page 49.

## Ordering Information

 Infrared light




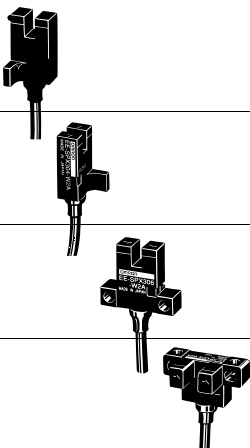
| Appearance                                                                         | Sensing method    | Sensing distance (slot width)                                                       |        | Output type | Output configuration | Cable length | Model                        |
|------------------------------------------------------------------------------------|-------------------|-------------------------------------------------------------------------------------|--------|-------------|----------------------|--------------|------------------------------|
|  | Through-beam type |  | 3.6 mm | NPN output  | Dark-ON              | 1 m          | EE-SPX302-W2A                |
|                                                                                    |                   |                                                                                     |        |             | Light-ON             |              | EE-SPX402-W2A                |
|                                                                                    |                   |  | 3.6 mm |             | Dark-ON              |              | EE-SPX304-W2A                |
|                                                                                    |                   |                                                                                     |        |             | Light-ON             |              | EE-SPX404-W2A                |
|                                                                                    |                   |  | 3.6 mm |             | Dark-ON              |              | EE-SPX306-W2A                |
|                                                                                    |                   |                                                                                     |        |             | Light-ON             |              | EE-SPX406-W2A                |
|                                                                                    |                   |  | 5.0 mm |             | Dark-ON              |              | EE-SPX305-W2A<br>(See note.) |
|                                                                                    |                   |                                                                                     |        |             | Light-ON             |              | EE-SPX405-W2A<br>(See note.) |

**Note:** The EE-SPX305-W2A/SPX405-W2A are not CE certified due to their internal structures. All other Photomicrosensors are CE certified.

## Ratings/Characteristics

| Item                  | Models | EE-SPX302-W2A, EE-SPX402-W2A<br>EE-SPX304-W2A, EE-SPX404-W2A<br>EE-SPX306-W2A, EE-SPX406-W2A                                                                                                                      | EE-SPX305-W2A<br>EE-SPX405-W2A |
|-----------------------|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| Sensing distance      |        | 3.6 mm (slot width)                                                                                                                                                                                               | 5 mm (slot width)              |
| Sensing object        |        | Opaque: 1 × 0.5 mm min.                                                                                                                                                                                           | Opaque: 2 × 0.8 mm min.        |
| Differential distance |        | 0.05 mm max.                                                                                                                                                                                                      |                                |
| Light source          |        | GaAs infrared LED (pulse lighting) with a peak wavelength of 940 nm                                                                                                                                               |                                |
| Indicator *1          |        | Light indicator (red)                                                                                                                                                                                             |                                |
| Supply voltage        |        | 5 to 24 VDC ±10%, ripple (p-p): 5% max.                                                                                                                                                                           |                                |
| Current consumption   |        | Average: 15 mA max.; Peak: 50 mA max.                                                                                                                                                                             |                                |
| Control output        |        | NPN voltage output:<br>Load power supply voltage: 5 to 24 VDC<br>Load current: 80 mA max.<br>80 mA load current with a residual voltage of 1.0 V max.<br>10 mA load current with a residual voltage of 0.4 V max. |                                |
| Response frequency *2 |        | 500 Hz min.                                                                                                                                                                                                       |                                |
| Ambient illumination  |        | 3,000 lx max. with incandescent light or sunlight on the surface of the receiver                                                                                                                                  |                                |
| Ambient temperature   |        | Operating: -10 to +55°C<br>Storage: -25 to +65°C                                                                                                                                                                  |                                |
| Ambient humidity      |        | Operating: 5% to 85%<br>Storage: 5% to 95%                                                                                                                                                                        |                                |
| Vibration resistance  |        | Destruction: 10 to 55 Hz, 1.5-mm double amplitude for 2 h each in X, Y, and Z directions                                                                                                                          |                                |
| Shock resistance      |        | Destruction: 500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions                                                                                                                                      |                                |
| Enclosure rating      |        | IEC IP50                                                                                                                                                                                                          |                                |
| Connecting method     |        | Pre-wired (standard cable length: 1 m)                                                                                                                                                                            |                                |
| Weight                |        | 18.5 g                                                                                                                                                                                                            |                                |
| Material              | Case   | Polycarbonate                                                                                                                                                                                                     |                                |
|                       | Holder |                                                                                                                                                                                                                   |                                |

- \* 1. The indicator is a GaP red LED (peak emission wavelength: 700 nm).  
 \* 2. The response frequency was measured by detecting the following rotating disk.



## I/O Circuits

### NPN Output



| Model                                                            | Output configuration | Timing charts                                                                                                                      | Output circuit                                                                 |
|------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| EE-SPX402-W2A<br>EE-SPX404-W2A<br>EE-SPX405-W2A<br>EE-SPX406-W2A | Light-ON             | Incident Interrupted<br>Light indicator (red) ON OFF<br>Output transistor ON OFF<br>Load 1 (relay) Operates Releases<br>Load 2 H L | <p>* Voltage output (when the sensor is connected to a transistor circuit)</p> |
| EE-SPX302-W2A<br>EE-SPX304-W2A<br>EE-SPX305-W2A<br>EE-SPX306-W2A | Dark-ON              | Incident Interrupted<br>Light indicator (red) ON OFF<br>Output transistor ON OFF<br>Load 1 (relay) Operates Releases<br>Load 2 H L |                                                                                |

Engineering Data

Sensing Position Characteristics  
(Typical)



EE-SPX302-W2A  
EE-SPX304-W2A  
EE-SPX306-W2A

EE-SPX302-W2A  
EE-SPX304-W2A  
EE-SPX306-W2A

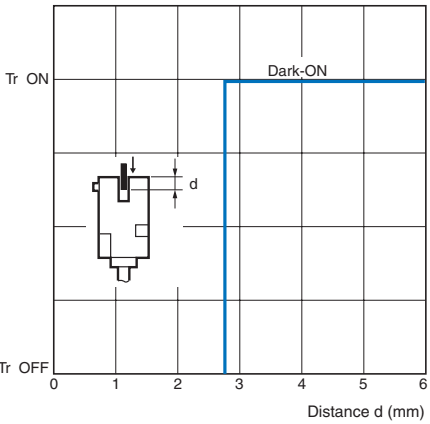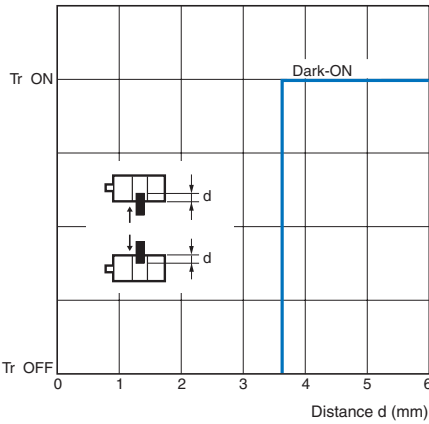

EE-SPX305-W2A

EE-SPX305-W2A

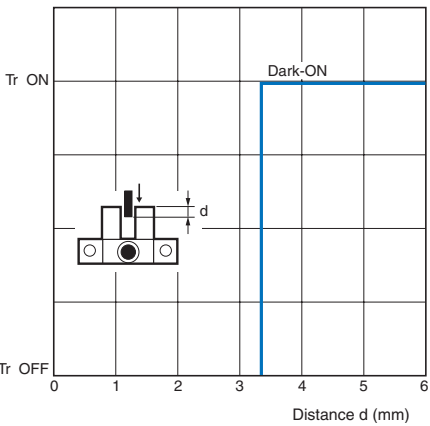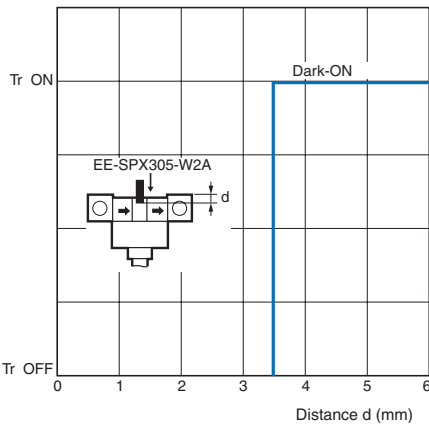

Precautions

Refer to *General Precautions* on page 23 to 28 for general precautions.

**Warning**

**Do not use this product in sensing devices designed to provide human safety.**




**Precautions for Correct Use**

Make sure that this product is used within the rated ambient environment conditions.



● **Wiring**

- When extending the cable, use an extension cable with conductors having a total cross-section area of 0.3 mm<sup>2</sup>. The total cable length must be 2 m maximum.
- To use a cable length longer than 2 m, attach a capacitor with a capacitance of approximately 10 μF to the wires as shown below. The distance between the terminal and the capacitor must be within 2 m. (Use a capacitor with a dielectric strength that is at least twice the Sensor's power supply voltage.)

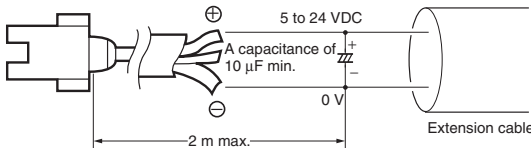

# Dimensions (Unit: mm)


EE-SPX302-W2A  
EE-SPX402-W2A

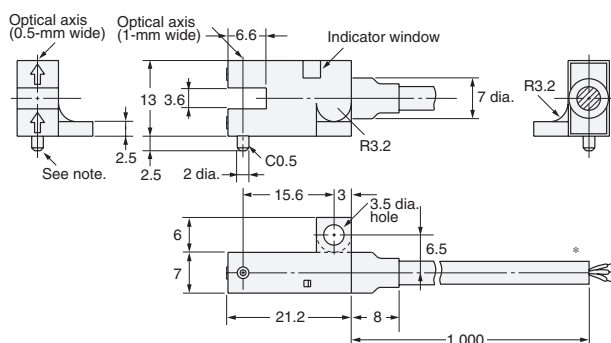

\* Vinyl-insulated round cable of 3.5 dia., 3 cores, (0.14 mm<sup>2</sup> with 1.0-dia. insulator); Standard length: 1 m

Note: The lug is used to prevent turning and to indicate the optical axis.  
When installing, make a fixed hole of 2.1 to 2.3 mm dia.


EE-SPX304-W2A  
EE-SPX404-W2A

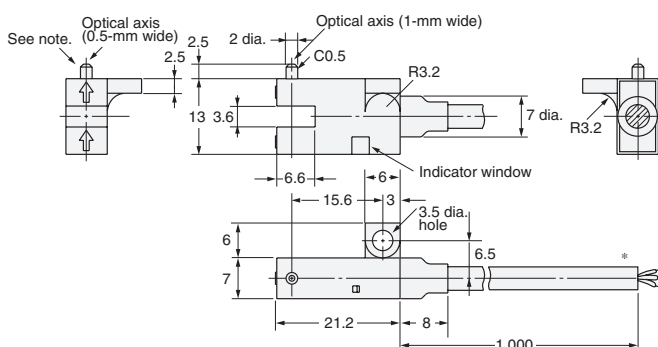

\* Vinyl-insulated round cable of 3.5 dia., 3 cores, (0.14 mm<sup>2</sup> with 1.0-dia. insulator); Standard length: 1 m



Note: The lug is used to prevent turning and to indicate the optical axis.  
When installing, make a fixed hole of 2.1 to 2.3 mm dia.

EE-SPX306-W2A  
EE-SPX406-W2A

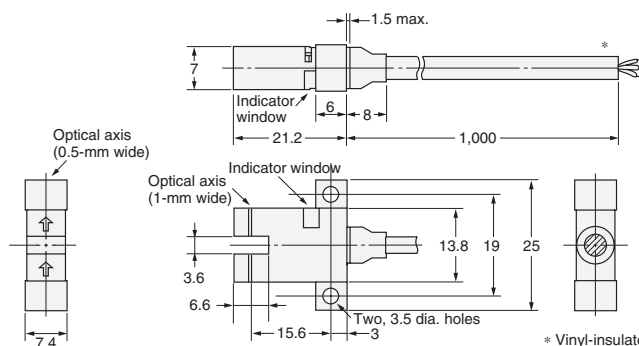

\* Vinyl-insulated round cable of 3.5 dia., 3 cores, (0.14 mm<sup>2</sup> with 1.0-dia. insulator); Standard length: 1 m

EE-SPX305-W2A  
EE-SPX405-W2A

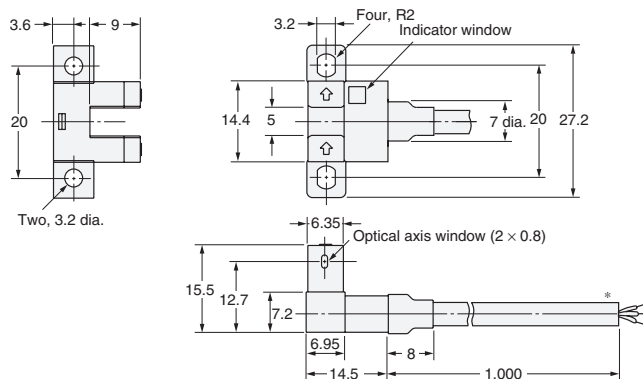

\* Vinyl-insulated round cable of 3.5 dia., 3 cores, (0.14 mm<sup>2</sup> with 1.0-dia. insulator); Standard length: 1 m



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.