

## Features

- Optimized for 1.8V systems
  - As fast as 7.1 ns pin-to-pin delays
  - As low as 14  $\mu$ A quiescent current
- Industry's best 0.18 micron CMOS CPLD
  - Optimized architecture for effective logic synthesis
  - Multi-voltage I/O operation — 1.5V to 3.3V
- Available in multiple package options
  - 208-pin PQFP with 173 user I/O
  - 256-ball FT (1.0mm) BGA with 212 user I/O
  - 324-ball FG (1.0mm) BGA with 270 user I/O
  - Pb-free available for all packages
- Advanced system features
  - Fastest in system programming
    - 1.8V ISP using IEEE 1532 (JTAG) interface
  - IEEE1149.1 JTAG Boundary Scan Test
  - Optional Schmitt-trigger input (per pin)
  - Unsurpassed low power management
    - DataGATE enable signal control
  - Four separate I/O banks
  - RealDigital 100% CMOS product term generation
  - Flexible clocking modes
    - Optional DualEDGE triggered registers
    - Clock divider (divide by 2,4,6,8,10,12,14,16)
    - CoolCLOCK
  - Global signal options with macrocell control
    - Multiple global clocks with phase selection per macrocell
    - Multiple global output enables
    - Global set/reset
  - Advanced design security
  - PLA architecture
    - Superior pinout retention
    - 100% product term routability across function block
  - Open-drain output option for Wired-OR and LED drive
  - Optional bus-hold, 3-state or weak pullup on selected I/O pins
  - Optional configurable grounds on unused I/Os
  - Mixed I/O voltages compatible with 1.5V, 1.8V, 2.5V, and 3.3V logic levels
    - SSTL2-1, SSTL3-1, and HSTL-1 I/O compatibility
  - Hot Pluggable

Refer to the CoolRunner™-II family data sheet for architecture description.

## Description

The CoolRunner-II 512-macrocell device is designed for both high performance and low power applications. This lends power savings to high-end communication equipment and high speed to battery operated devices. Due to the low power stand-by and dynamic operation, overall system reliability is improved.

This device consists of thirty two Function Blocks inter-connected by a low power Advanced Interconnect Matrix (AIM). The AIM feeds 40 true and complement inputs to each Function Block. The Function Blocks consist of a 40 by 56 P-term PLA and 16 macrocells which contain numerous configuration bits that allow for combinational or registered modes of operation.

Additionally, these registers can be globally reset or preset and configured as a D or T flip-flop or as a D latch. There are also multiple clock signals, both global and local product term types, configured on a per macrocell basis. Output pin configurations include slew rate limit, bus hold, pull-up, open drain and programmable grounds. A Schmitt-trigger input is available on a per input pin basis. In addition to storing macrocell output states, the macrocell registers may be configured as "direct input" registers to store signals directly from input pins.

Clocking is available on a global or Function Block basis. Three global clocks are available for all Function Blocks as a synchronous clock source. Macrocell registers can be individually configured to power up to the zero or one state. A global set/reset control line is also available to asynchronously set or reset selected registers during operation. Additional local clock, synchronous clock-enable, asynchronous set/reset and output enable signals can be formed using product terms on a per-macrocell or per-Function Block basis.

A DualEDGE flip-flop feature is also available on a per macrocell basis. This feature allows high performance synchronous operation based on lower frequency clocking to help reduce the total power consumption of the device.

Circuitry has also been included to divide one externally supplied global clock (GCK2) by eight different selections. This yields divide by even and odd clock frequencies.

The use of the clock divide (division by 2) and DualEDGE flip-flop gives the resultant CoolCLOCK feature.

DataGATE is a method to selectively disable inputs of the CPLD that are not of interest during certain points in time.

By mapping a signal to the DataGATE function, lower power can be achieved due to reduction in signal switching.

Another feature that eases voltage translation is I/O banking. Four I/O banks are available on the CoolRunner-II 512 macrocell device that permits easy interfacing to 3.3V, 2.5V, 1.8V, and 1.5V devices.

The CoolRunner-II 512 macrocell CPLD is I/O compatible with various JEDEC I/O standards (see [Table 1](#)). This device is also 1.5V I/O compatible with the use of Schmitt-trigger inputs.

## RealDigital Design Technology

Xilinx CoolRunner-II CPLDs are fabricated on a 0.18 micron process technology which is derived from leading edge FPGA product development. CoolRunner-II CPLDs employ RealDigital, a design technique that makes use of CMOS technology in both the fabrication and design methodology. RealDigital design technology employs a cascade of CMOS gates to implement sum of products instead of traditional sense amplifier methodology. Due to this technology, Xilinx CoolRunner-II CPLDs achieve both high-performance and low power operation.

## Supported I/O Standards

The CoolRunner-II 512 macrocell features LVCMOS, LVTTTL, SSTL, and HSTL I/O implementations. See [Table 1](#)


for I/O standard voltages. The LVTTTL I/O standard is a general purpose EIA/JEDEC standard for 3.3V applications that use an LVTTTL input buffer and Push-Pull output buffer. The LVCMOS standard is used in 3.3V, 2.5V, 1.8V applications. Both HSTL and SSTL I/O standards make use of a  $V_{REF}$  pin for JEDEC compliance. CoolRunner-II CPLDs are also 1.5V I/O compatible with the use of Schmitt-trigger inputs.

Table 1: I/O Standards for XC2C512<sup>(1)</sup>

| IOSTANDARD Attribute    | Output $V_{CCIO}$ | Input $V_{CCIO}$ | Input $V_{REF}$ | Board Termination Voltage $V_{TT}$ |
|-------------------------|-------------------|------------------|-----------------|------------------------------------|
| LVTTTL                  | 3.3               | 3.3              | N/A             | N/A                                |
| LVCMOS33                | 3.3               | 3.3              | N/A             | N/A                                |
| LVCMOS25                | 2.5               | 2.5              | N/A             | N/A                                |
| LVCMOS18                | 1.8               | 1.8              | N/A             | N/A                                |
| LVCMOS15 <sup>(2)</sup> | 1.5               | 1.5              | N/A             | N/A                                |
| HSTL_1                  | 1.5               | 1.5              | 0.75            | 0.75                               |
| SSTL2_1                 | 2.5               | 2.5              | 1.25            | 1.25                               |
| SSTL3_1                 | 3.3               | 3.3              | 1.5             | 1.5                                |

(1) For information on Vref pins, see [XAPP399](#).

(2) LVCMOS15 requires Schmitt-trigger inputs.

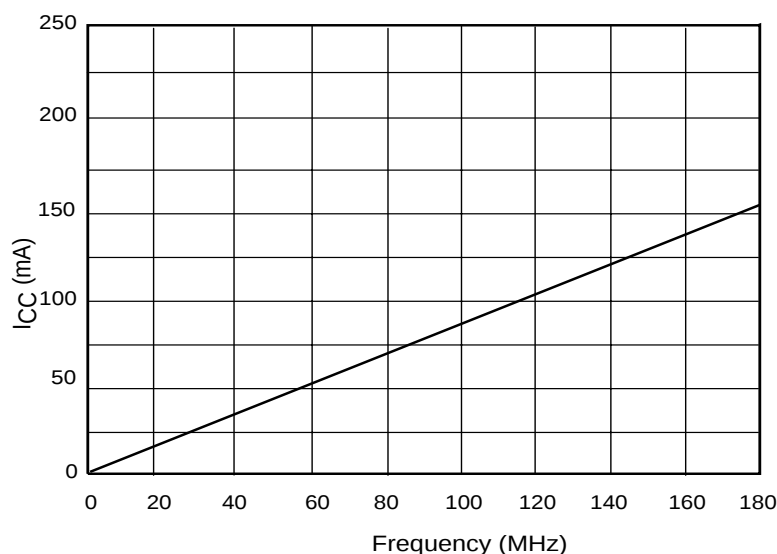

DS096\_01\_030705

Figure 1:  $I_{CC}$  vs Frequency

Table 2:  $I_{CC}$  vs Frequency (LVCMOS 1.8V  $T_A = 25^\circ\text{C}$ )<sup>(1)</sup>

|                       | Frequency (MHz) |       |       |       |       |       |        |        |        |        |
|-----------------------|-----------------|-------|-------|-------|-------|-------|--------|--------|--------|--------|
|                       | 0               | 20    | 40    | 60    | 80    | 100   | 120    | 140    | 160    | 180    |
| Typical $I_{CC}$ (mA) | 0.025           | 17.22 | 34.37 | 52.04 | 69.44 | 86.85 | 105.13 | 122.68 | 140.23 | 157.78 |

### Notes:

- 16-bit up/down, Resettable binary counter (one counter per function block).

## Absolute Maximum Ratings

| Symbol           | Description                                      | Value       | Units |
|------------------|--------------------------------------------------|-------------|-------|
| $V_{CC}$         | Supply voltage relative to ground                | –0.5 to 2.0 | V     |
| $V_{CCIO}$       | Supply voltage for output drivers                | –0.5 to 4.0 | V     |
| $V_{JTAG}^{(2)}$ | JTAG input voltage limits                        | –0.5 to 4.0 | V     |
| $V_{CCAUX}$      | JTAG input supply voltage                        | –0.5 to 4.0 | V     |
| $V_{IN}^{(1)}$   | Input voltage relative to ground <sup>(1)</sup>  | –0.5 to 4.0 | V     |
| $V_{TS}^{(1)}$   | Voltage applied to 3-state output <sup>(1)</sup> | –0.5 to 4.0 | V     |
| $T_{STG}^{(3)}$  | Storage Temperature (ambient)                    | –65 to +150 | °C    |
| $T_J$            | Junction Temperature                             | +150        | °C    |

### Notes:

- Maximum DC undershoot below GND must be limited to either 0.5V or 10 mA, whichever is easiest to achieve. During transitions, the device pins may undershoot to –2.0v or overshoot to +4.5V, provided this over or undershoot lasts less than 10 ns and with the forcing current being limited to 200 mA.
- Valid over commercial temperature range.
- For soldering guidelines and thermal considerations, see the [Device Packaging](#) information on the Xilinx website. For Pb free packages, see [XAPP427](#).

## Recommended Operating Conditions

| Symbol             | Parameter                                           |                                            | Min | Max | Units |
|--------------------|-----------------------------------------------------|--------------------------------------------|-----|-----|-------|
| V <sub>CC</sub>    | Supply voltage for internal logic and input buffers | Commercial T <sub>A</sub> = 0°C to +70°C   | 1.7 | 1.9 | V     |
|                    |                                                     | Industrial T <sub>A</sub> = −40°C to +85°C | 1.7 | 1.9 | V     |
| V <sub>CCIO</sub>  | Supply voltage for output drivers @ 3.3V operation  |                                            | 3.0 | 3.6 | V     |
|                    | Supply voltage for output drivers @ 2.5V operation  |                                            | 2.3 | 2.7 | V     |
|                    | Supply voltage for output drivers @ 1.8V operation  |                                            | 1.7 | 1.9 | V     |
|                    | Supply voltage for output drivers @ 1.5V operation  |                                            | 1.4 | 1.6 | V     |
| V <sub>CCAUX</sub> | JTAG programming                                    |                                            | 1.7 | 3.6 | V     |

## DC Electrical Characteristics (Over Recommended Operating Conditions)

| Symbol         | Parameter                      | Test Conditions                                   | Typical | Max. | Units         |
|----------------|--------------------------------|---------------------------------------------------|---------|------|---------------|
| $I_{CCSB}$     | Standby current Commercial     | $V_{CC} = 1.9\text{V}$ , $V_{CCIO} = 3.6\text{V}$ | 50      | 240  | $\mu\text{A}$ |
| $I_{CCSB}$     | Standby current Industrial     | $V_{CC} = 1.9\text{V}$ , $V_{CCIO} = 3.6\text{V}$ | 150     | 400  | $\mu\text{A}$ |
| $I_{CC}^{(1)}$ | Dynamic current                | $f = 1\text{ MHz}$                                | -       | 1    | mA            |
|                |                                | $f = 50\text{ MHz}$                               | -       | 55   | mA            |
| $C_{JTAG}$     | JTAG input capacitance         | $f = 1\text{ MHz}$                                | -       | 10   | pF            |
| $C_{CLK}$      | Global clock input capacitance | $f = 1\text{ MHz}$                                | -       | 12   | pF            |
| $C_{IO}$       | I/O capacitance                | $f = 1\text{ MHz}$                                | -       | 10   | pF            |
| $I_{IL}^{(2)}$ | Input leakage current          | $V_{IN} = 0\text{V}$ or $V_{CCIO}$ to 3.9V        | -       | +/-1 | $\mu\text{A}$ |
| $I_{IH}^{(2)}$ | I/O High-Z leakage             | $V_{IN} = 0\text{V}$ or $V_{CCIO}$ to 3.9V        | -       | +/-1 | $\mu\text{A}$ |

### Notes:

- 16-bit up/down, Resettable binary counter (one counter per function block) tested at  $V_{CC} = V_{CCIO} = 1.9\text{V}$ .
- See Quality and Reliability section of the CoolRunner-II family data sheet.

## LVC MOS 3.3V and LVTTTL 3.3V DC Voltage Specifications

| Symbol     | Parameter                 | Test Conditions                                    | Min.                     | Max. | Units |
|------------|---------------------------|----------------------------------------------------|--------------------------|------|-------|
| $V_{CCIO}$ | Input source voltage      | -                                                  | 3.0                      | 3.6  | V     |
| $V_{IH}$   | High level input voltage  | -                                                  | 2                        | 3.9  | V     |
| $V_{IL}$   | Low level input voltage   | -                                                  | -0.3                     | 0.8  | V     |
| $V_{OH}$   | High level output voltage | $I_{OH} = -8\text{ mA}$ , $V_{CCIO} = 3\text{V}$   | $V_{CCIO} - 0.4\text{V}$ | -    | V     |
|            |                           | $I_{OH} = -0.1\text{ mA}$ , $V_{CCIO} = 3\text{V}$ | $V_{CCIO} - 0.2\text{V}$ | -    | V     |
| $V_{OL}$   | Low level output voltage  | $I_{OL} = 8\text{ mA}$ , $V_{CCIO} = 3\text{V}$    | -                        | 0.4  | V     |
|            |                           | $I_{OL} = 0.1\text{ mA}$ , $V_{CCIO} = 3\text{V}$  | -                        | 0.2  | V     |

## LVC MOS 2.5V DC Voltage Specifications

| Symbol     | Parameter                 | Test Conditions                                      | Min.                     | Max.                   | Units |
|------------|---------------------------|------------------------------------------------------|--------------------------|------------------------|-------|
| $V_{CCIO}$ | Input source voltage      | -                                                    | 2.3                      | 2.7                    | V     |
| $V_{IH}$   | High level input voltage  | -                                                    | 1.7                      | $V_{CCIO} + 0.3^{(1)}$ | V     |
| $V_{IL}$   | Low level input voltage   | -                                                    | -0.3                     | 0.7                    | V     |
| $V_{OH}$   | High level output voltage | $I_{OH} = -8\text{ mA}$ , $V_{CCIO} = 2.3\text{V}$   | $V_{CCIO} - 0.4\text{V}$ | -                      | V     |
|            |                           | $I_{OH} = -0.1\text{ mA}$ , $V_{CCIO} = 2.3\text{V}$ | $V_{CCIO} - 0.2\text{V}$ | -                      | V     |
| $V_{OL}$   | Low level output voltage  | $I_{OL} = 8\text{ mA}$ , $V_{CCIO} = 2.3\text{V}$    | -                        | 0.4                    | V     |
|            |                           | $I_{OL} = 0.1\text{ mA}$ , $V_{CCIO} = 2.3\text{V}$  | -                        | 0.2                    | V     |

(1) The  $V_{IH}$  Max value represents the JEDEC specification for LVC MOS25. The CoolRunner-II input buffer can tolerate up to 3.9V without physical damage.

## LVC MOS 1.8V DC Voltage Specifications

| Symbol     | Parameter                 | Test Conditions                                      | Min.                   | Max.                   | Units |
|------------|---------------------------|------------------------------------------------------|------------------------|------------------------|-------|
| $V_{CCIO}$ | Input source voltage      | -                                                    | 1.7                    | 1.9                    | V     |
| $V_{IH}$   | High level input voltage  | -                                                    | $0.65 \times V_{CCIO}$ | $V_{CCIO} + 0.3^{(1)}$ | V     |
| $V_{IL}$   | Low level input voltage   | -                                                    | -0.3                   | $0.35 \times V_{CCIO}$ | V     |
| $V_{OH}$   | High level output voltage | $I_{OH} = -8\text{ mA}$ , $V_{CCIO} = 1.7\text{V}$   | $V_{CCIO} - 0.45$      | -                      | V     |
|            |                           | $I_{OH} = -0.1\text{ mA}$ , $V_{CCIO} = 1.7\text{V}$ | $V_{CCIO} - 0.2$       | -                      | V     |
| $V_{OL}$   | Low level output voltage  | $I_{OL} = 8\text{ mA}$ , $V_{CCIO} = 1.7\text{V}$    | -                      | 0.45                   | V     |
|            |                           | $I_{OL} = 0.1\text{ mA}$ , $V_{CCIO} = 1.7\text{V}$  | -                      | 0.2                    | V     |

(1) The  $V_{IH}$  Max value represents the JEDEC specification for LVC MOS18. The CoolRunner-II input buffer can tolerate up to 3.9V without physical damage.

## LVC MOS 1.5V DC Voltage Specifications<sup>(1)</sup>

| Symbol     | Parameter                | Test Conditions | Min.                  | Max.                  | Units |
|------------|--------------------------|-----------------|-----------------------|-----------------------|-------|
| $V_{CCIO}$ | Input source voltage     | -               | 1.4                   | 1.6                   | V     |
| $V_{IH}$   | High level input voltage | -               | $0.5 \times V_{CCIO}$ | $0.8 \times V_{CCIO}$ | V     |
| $V_{IL}$   | Low level input voltage  | -               | $0.2 \times V_{CCIO}$ | $0.5 \times V_{CCIO}$ | V     |

| Symbol          | Parameter                 | Test Conditions                                     | Min.                     | Max. | Units |
|-----------------|---------------------------|-----------------------------------------------------|--------------------------|------|-------|
| V <sub>OH</sub> | High level output voltage | I <sub>OH</sub> = -8 mA, V <sub>CCIO</sub> = 1.4V   | V <sub>CCIO</sub> - 0.45 | -    | V     |
|                 |                           | I <sub>OH</sub> = -0.1 mA, V <sub>CCIO</sub> = 1.4V | V <sub>CCIO</sub> - 0.2  | -    | V     |
| V <sub>OL</sub> | Low level output voltage  | I <sub>OL</sub> = 8 mA, V <sub>CCIO</sub> = 1.4V    | -                        | 0.4  | V     |
|                 |                           | I <sub>OL</sub> = 0.1 mA, V <sub>CCIO</sub> = 1.4V  | -                        | 0.2  | V     |

**Notes:**

1. Hysteresis used on 1.5V inputs.

## Schmitt Trigger Input DC Voltage Specifications

| Symbol            | Parameter                          | Test Conditions | Min.                    | Max.                    | Units |
|-------------------|------------------------------------|-----------------|-------------------------|-------------------------|-------|
| V <sub>CCIO</sub> | Input source voltage               |                 | 1.4                     | 3.9                     | V     |
| V <sub>T+</sub>   | Input hysteresis threshold voltage |                 | 0.5 x V <sub>CCIO</sub> | 0.8 x V <sub>CCIO</sub> | V     |
| V <sub>T-</sub>   |                                    |                 | 0.2 x V <sub>CCIO</sub> | 0.5 x V <sub>CCIO</sub> | V     |

## SSTL2-1 DC Voltage Specifications

| Symbol                          | Parameter                 | Test Conditions                                   | Min.                     | Typ  | Max.                    | Units |
|---------------------------------|---------------------------|---------------------------------------------------|--------------------------|------|-------------------------|-------|
| V <sub>CCIO</sub>               | Input source voltage      |                                                   | 2.3                      | 2.5  | 2.7                     | V     |
| V <sub>REF</sub> <sup>(1)</sup> | Input reference voltage   |                                                   | 1.15                     | 1.25 | 1.35                    | V     |
| V <sub>TT</sub> <sup>(2)</sup>  | Termination voltage       |                                                   | V <sub>REF</sub> - 0.04  | 1.25 | V <sub>REF</sub> + 0.04 | V     |
| V <sub>IH</sub>                 | High level input voltage  |                                                   | V <sub>REF</sub> + 0.18  | -    | 3.9                     | V     |
| V <sub>IL</sub>                 | Low level input voltage   |                                                   | -0.3                     | -    | V <sub>REF</sub> - 0.18 | V     |
| V <sub>OH</sub>                 | High level output voltage | I <sub>OH</sub> = -8 mA, V <sub>CCIO</sub> = 2.3V | V <sub>CCIO</sub> - 0.62 | -    | -                       | V     |
| V <sub>OL</sub>                 | Low level output voltage  | I <sub>OL</sub> = 8 mA, V <sub>CCIO</sub> = 2.3V  | -                        | -    | 0.54                    | V     |

**Notes:**

1. V<sub>REF</sub> should track the variations in V<sub>CCIO</sub>, also peak to peak AC noise on V<sub>REF</sub> may not exceed ±2% V<sub>REF</sub>
2. V<sub>TT</sub> of transmitting device must track V<sub>REF</sub> of receiving devices

## SSTL3-1 DC Voltage Specifications

| Symbol                          | Parameter                 | Test Conditions                                 | Min.                    | Typ | Max.                    | Units |
|---------------------------------|---------------------------|-------------------------------------------------|-------------------------|-----|-------------------------|-------|
| V <sub>CCIO</sub>               | Input source voltage      |                                                 | 3.0                     | 3.3 | 3.6                     | V     |
| V <sub>REF</sub> <sup>(1)</sup> | Input reference voltage   |                                                 | 1.3                     | 1.5 | 1.7                     | V     |
| V <sub>TT</sub> <sup>(2)</sup>  | Termination voltage       |                                                 | V <sub>REF</sub> - 0.05 | 1.5 | V <sub>REF</sub> + 0.05 | V     |
| V <sub>IH</sub>                 | High level input voltage  |                                                 | V <sub>REF</sub> + 0.2  | -   | V <sub>CCIO</sub> + 0.3 | V     |
| V <sub>IL</sub>                 | Low level input voltage   |                                                 | -0.3                    | -   | V <sub>REF</sub> - 0.2  | V     |
| V <sub>OH</sub>                 | High level output voltage | I <sub>OH</sub> = -8 mA, V <sub>CCIO</sub> = 3V | V <sub>CCIO</sub> - 1.1 | -   | -                       | V     |
| V <sub>OL</sub>                 | Low level output voltage  | I <sub>OL</sub> = 8 mA, V <sub>CCIO</sub> = 3V  | -                       | -   | 0.7                     | V     |

**Notes:**

1. V<sub>REF</sub> should track the variations in V<sub>CCIO</sub>, also peak to peak AC noise on V<sub>REF</sub> may not exceed ±2% V<sub>REF</sub>
2. V<sub>TT</sub> of transmitting device must track V<sub>REF</sub> of receiving devices

## HSTL1 DC Voltage Specifications

| Symbol          | Parameter                 | Test Conditions                                     | Min.             | Typ                   | Max.            | Units |
|-----------------|---------------------------|-----------------------------------------------------|------------------|-----------------------|-----------------|-------|
| $V_{CCIO}$      | Input source voltage      |                                                     | 1.4              | 1.5                   | 1.6             | V     |
| $V_{REF}^{(1)}$ | Input reference voltage   |                                                     | 0.68             | 0.75                  | 0.90            | V     |
| $V_{TT}^{(2)}$  | Termination voltage       |                                                     | -                | $V_{CCIO} \times 0.5$ | -               | V     |
| $V_{IH}$        | High level input voltage  |                                                     | $V_{REF} + 0.1$  | -                     | 1.9             | V     |
| $V_{IL}$        | Low level input voltage   |                                                     | -0.3             | -                     | $V_{REF} - 0.1$ | V     |
| $V_{OH}$        | High level output voltage | $I_{OH} = -8 \text{ mA}$ , $V_{CCIO} = 1.7\text{V}$ | $V_{CCIO} - 0.4$ | -                     | -               | V     |
| $V_{OL}$        | Low level output voltage  | $I_{OL} = 8 \text{ mA}$ , $V_{CCIO} = 1.7\text{V}$  | -                | -                     | 0.4             | V     |

**Notes:**

- $V_{REF}$  should track the variations in  $V_{CCIO}$ , also peak-to-peak AC noise on  $V_{REF}$  may not exceed  $\pm 2\% V_{REF}$
- $V_{TT}$  of transmitting device must track  $V_{REF}$  of receiving devices

## AC Electrical Characteristics Over Recommended Operating Conditions

| Symbol                              | Parameter                                           | -7   |      | -10  |      | Units |
|-------------------------------------|-----------------------------------------------------|------|------|------|------|-------|
|                                     |                                                     | Min. | Max. | Min. | Max. |       |
| T <sub>PD1</sub>                    | Propagation delay (single p-term)                   | -    | 7.1  | -    | 9.2  | ns    |
| T <sub>PD2</sub>                    | Propagation delay (OR array)                        | -    | 7.5  | -    | 10.0 | ns    |
| T <sub>SUD</sub>                    | Direct input register set-up time                   | 3.4  | -    | 4.0  | -    | ns    |
| T <sub>SU1</sub>                    | Setup time fast (single p-term)                     | 2.6  | -    | 3.1  | -    | ns    |
| T <sub>SU2</sub>                    | Setup time (OR array)                               | 3.0  | -    | 3.9  | -    | ns    |
| T <sub>H</sub>                      | Direct input register hold time                     | 0    | -    | 0    | -    | ns    |
| T <sub>H</sub>                      | P-term hold time                                    | 0    | -    | 0    | -    | ns    |
| T <sub>CO</sub>                     | Clock to output                                     | -    | 5.8  | -    | 7.9  | ns    |
| F <sub>TOGGLE</sub> <sup>(1)</sup>  | Internal toggle rate                                | -    | 250  | -    | 166  | MHz   |
| F <sub>SYSTEM1</sub> <sup>(2)</sup> | Maximum system frequency                            | -    | 179  | -    | 128  | MHz   |
| F <sub>SYSTEM2</sub> <sup>(2)</sup> | Maximum system frequency                            | -    | 167  | -    | 116  | MHz   |
| F <sub>EXT1</sub> <sup>(3)</sup>    | Maximum external frequency                          | -    | 119  | -    | 91   | MHz   |
| F <sub>EXT2</sub> <sup>(3)</sup>    | Maximum external frequency                          | -    | 114  | -    | 85   | MHz   |
| T <sub>PSUD</sub>                   | Direct input register p-term clock setup time       | 2.1  | -    | 2.8  | -    | ns    |
| T <sub>PSU1</sub>                   | P-term clock setup time (single p-term)             | 1.1  | -    | 1.7  | -    | ns    |
| T <sub>PSU2</sub>                   | P-term clock setup time (OR array)                  | 1.5  | -    | 2.5  | -    | ns    |
| T <sub>PHD</sub>                    | Direct input register p-term clock hold time        | 0.1  | -    | 0.4  | -    | ns    |
| T <sub>PH</sub>                     | P-term clock hold                                   | 1.3  | -    | 1.7  | -    | ns    |
| T <sub>PCO</sub>                    | P-term clock to output                              | -    | 7.3  | -    | 9.3  | ns    |
| T <sub>OE</sub> /T <sub>OD</sub>    | Global OE to output enable/disable                  | -    | 6.5  | -    | 9.2  | ns    |
| T <sub>POE</sub> /T <sub>POD</sub>  | P-term OE to output enable/disable                  | -    | 7.5  | -    | 10.2 | ns    |
| T <sub>MOE</sub> /T <sub>MOD</sub>  | Macrocell driven OE to output enable/disable        | -    | 8.6  | -    | 12.5 | ns    |
| T <sub>PAO</sub>                    | P-term set/reset to output valid                    | -    | 7.6  | -    | 11.6 | ns    |
| T <sub>AO</sub>                     | Global set/reset to output valid                    | -    | 7.5  | -    | 11.5 | ns    |
| T <sub>SUEC</sub>                   | Register clock enable setup time                    | 2.8  | -    | 3.2  | -    | ns    |
| T <sub>HEC</sub>                    | Register clock enable hold time                     | 0    | -    | 0    | -    | ns    |
| T <sub>CW</sub>                     | Global clock pulse width High or Low                | 2.0  | -    | 3.0  | -    | ns    |
| T <sub>PCW</sub>                    | P-term pulse width High or Low                      | 7.5  | -    | 10.0 | -    | ns    |
| T <sub>APRPW</sub>                  | Asynchronous preset/reset pulse width (High or Low) | 7.5  | -    | 10.0 | -    | ns    |
| T <sub>DGSU</sub>                   | Set-up before DataGATE latch assertion              | 0.0  | -    | 0.0  | -    | ns    |
| T <sub>DGH</sub>                    | Hold to DataGATE latch assertion                    | 4.0  | -    | 6.0  | -    | ns    |
| T <sub>DGR</sub>                    | DataGATE recovery to new data                       | -    | 9.3  | -    | 11.0 | ns    |
| T <sub>DGW</sub>                    | DataGATE low pulse width                            | 3.0  | -    | 5.0  | -    | ns    |
| T <sub>CDRSU</sub>                  | CDRST setup time before falling edge GCLK2          | 1.7  | -    | 2.5  | -    | ns    |
| T <sub>CDRH</sub>                   | Hold time CDRST after falling edge GCLK2            | 0    | -    | 0    | -    | ns    |
| T <sub>CONFIG</sub> <sup>(4)</sup>  | Configuration time                                  | -    | 400  | -    | 400  | μs    |

### Notes:

1. F<sub>TOGGLE</sub> is the maximum clock frequency to which a T-Flip Flop can reliably toggle (see the CoolRunner-II family data sheet for more information).
2. F<sub>SYSTEM1</sub> (1/T<sub>CYCLE</sub>) is the internal operating frequency for a device fully populated with 16-bit Resettable binary counter through one p-term per macrocell while F<sub>SYSTEM2</sub> is through the OR array.
3. F<sub>EXT1</sub>(1/T<sub>SU1</sub>+T<sub>CO</sub>) is the maximum external frequency using one p-term while F<sub>EXT2</sub> is through the OR array
4. Typical configuration current during T<sub>CONFIG</sub> is approximately 15mA

## Internal Timing Parameters<sup>(1)</sup>

| Symbol                                   | Parameter <sup>(1)</sup>           | -7   |      | -10  |      | Units |
|------------------------------------------|------------------------------------|------|------|------|------|-------|
|                                          |                                    | Min. | Max. | Min. | Max. |       |
| Buffer Delays                            |                                    |      |      |      |      |       |
| T <sub>IN</sub>                          | Input buffer delay                 | -    | 3.1  | -    | 3.8  | ns    |
| T <sub>DIN</sub>                         | Direct data register input delay   | -    | 4.4  | -    | 5.5  | ns    |
| T <sub>GCK</sub>                         | Global Clock buffer delay          | -    | 2.4  | -    | 3.3  | ns    |
| T <sub>GSR</sub>                         | Global set/reset buffer delay      | -    | 3.8  | -    | 4.6  | ns    |
| T <sub>GTS</sub>                         | Global 3-state buffer delay        | -    | 2.9  | -    | 3.7  | ns    |
| T <sub>OUT</sub>                         | Output buffer delay                | -    | 3.0  | -    | 3.9  | ns    |
| T <sub>EN</sub>                          | Output buffer enable/disable delay | -    | 3.6  | -    | 5.5  | ns    |
| P-term Delays                            |                                    |      |      |      |      |       |
| T <sub>CT</sub>                          | Control term delay                 | -    | 0.8  | -    | 0.9  | ns    |
| T <sub>LOGI1</sub>                       | Single P-term delay adder          | -    | 0.5  | -    | 0.8  | ns    |
| T <sub>LOGI2</sub>                       | Multiple P-term delay adder        | -    | 0.4  | -    | 0.8  | ns    |
| Macrocell Delay                          |                                    |      |      |      |      |       |
| T <sub>PDI</sub>                         | Input to output valid              | -    | 0.5  | -    | 0.7  | ns    |
| T <sub>SUI</sub>                         | Setup before clock                 | 1.4  | -    | 1.8  | -    | ns    |
| T <sub>HI</sub>                          | Hold after clock                   | 0    | -    | 0    | -    | ns    |
| T <sub>ECSU</sub>                        | Enable clock setup time            | 1.3  | -    | 1.8  | -    | ns    |
| T <sub>ECHO</sub>                        | Enable clock hold time             | 0    | -    | 0    | -    | ns    |
| T <sub>COI</sub>                         | Clock to output valid              | -    | 0.4  | -    | 0.7  | ns    |
| T <sub>AOI</sub>                         | Set/reset to output valid          | -    | 0.7  | -    | 3.0  | ns    |
| T <sub>CDBL</sub>                        | Clock doubler delay                | -    | 0    | -    | 0    | ns    |
| Feedback Delays                          |                                    |      |      |      |      |       |
| T <sub>F</sub>                           | Feedback delay                     | -    | 3.3  | -    | 4.5  | ns    |
| T <sub>OEM</sub>                         | Macrocell to global OE delay       | -    | 2.2  | -    | 3.0  | ns    |
| I/O Standard Time Adder Delays 1.5V CMOS |                                    |      |      |      |      |       |
| T <sub>HYS15</sub>                       | Hysteresis input adder             | -    | 3.0  | -    | 4.0  | ns    |
| T <sub>OUT15</sub>                       | Output adder                       | -    | 0.8  | -    | 1.0  | ns    |
| T <sub>SLEW15</sub>                      | Output slew rate adder             | -    | 3.0  | -    | 4.0  | ns    |
| I/O Standard Time Adder Delays 1.8V CMOS |                                    |      |      |      |      |       |
| T <sub>HYS18</sub>                       | Hysteresis input adder             | -    | 2.0  | -    | 3.0  | ns    |
| T <sub>OUT18</sub>                       | Output adder                       | -    | 0    | -    | 0    | ns    |
| T <sub>SLEW18</sub>                      | Output slew rate adder             | -    | 2.5  | -    | 4.0  | ns    |

## Internal Timing Parameters<sup>(1)</sup> (Continued)

| Symbol                                       | Parameter <sup>(1)</sup>                                                                                   | -7   |      | -10  |      | Units |
|----------------------------------------------|------------------------------------------------------------------------------------------------------------|------|------|------|------|-------|
|                                              |                                                                                                            | Min. | Max. | Min. | Max. |       |
| I/O Standard Time Adder Delays 2.5V CMOS     |                                                                                                            |      |      |      |      |       |
| T <sub>IN25</sub>                            | Standard input adder                                                                                       | -    | 0.6  | -    | 1.0  | ns    |
| T <sub>HYS25</sub>                           | Hysteresis input adder                                                                                     | -    | 1.5  | -    | 3.0  | ns    |
| T <sub>OUT25</sub>                           | Output adder                                                                                               | -    | 0.8  | -    | 2.0  | ns    |
| T <sub>SLEW25</sub>                          | Output slew rate adder                                                                                     | -    | 3.0  | -    | 4.0  | ns    |
| I/O Standard Time Adder Delays 3.3V CMOS/TTL |                                                                                                            |      |      |      |      |       |
| T <sub>IN33</sub>                            | Standard input adder                                                                                       | -    | 0.5  | -    | 2.0  | ns    |
| T <sub>HYS33</sub>                           | Hysteresis input adder                                                                                     | -    | 1.2  | -    | 3.0  | ns    |
| T <sub>OUT33</sub>                           | Output adder                                                                                               | -    | 1.2  | -    | 3.0  | ns    |
| T <sub>SLEW33</sub>                          | Output slew rate adder                                                                                     | -    | 3.0  | -    | 4.0  | ns    |
| I/O Standard Time Adder Delays HSTL, SSTL    |                                                                                                            |      |      |      |      |       |
| SSTL2-1                                      | Input adder to T <sub>IN</sub> , T <sub>DIN</sub> , T <sub>GCK</sub> , T <sub>GSR</sub> , T <sub>GTS</sub> | -    | 0.4  | -    | 1.0  | ns    |
|                                              | Output adder to T <sub>OUT</sub>                                                                           | -    | -0.5 | -    | 0.0  | ns    |
| SSTL3-1                                      | Input adder to T <sub>IN</sub> , T <sub>DIN</sub> , T <sub>GCK</sub> , T <sub>GSR</sub> , T <sub>GTS</sub> | -    | 0.6  | -    | 1.0  | ns    |
|                                              | Output adder to T <sub>OUT</sub>                                                                           | -    | 0.0  | -    | 0.0  | ns    |
| HSTL-1                                       | Input adder to T <sub>IN</sub> , T <sub>DIN</sub> , T <sub>GCK</sub> , T <sub>GSR</sub> , T <sub>GTS</sub> | -    | 0.8  | -    | 1.0  | ns    |
|                                              | Output adder to T <sub>OUT</sub>                                                                           | -    | 0.0  | -    | 0.0  | ns    |

### Notes:

1. 1.5 ns input pin signal rise/fall.

## Switching Characteristics

## AC Test Circuit


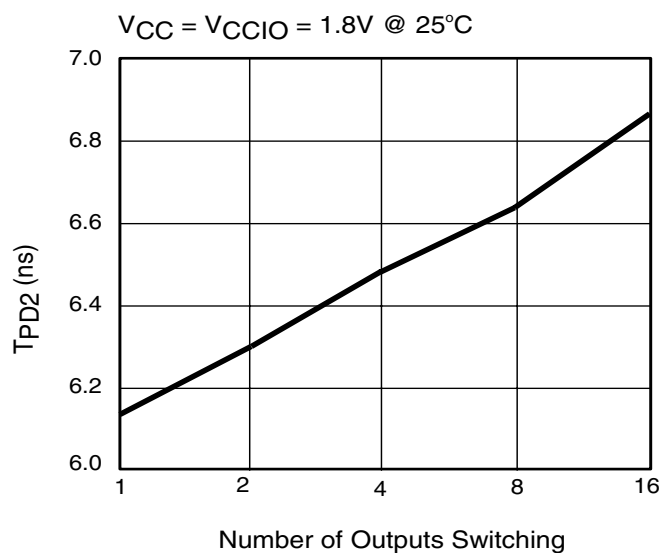


Figure 2: Derating Curve for  $T_{PD}$

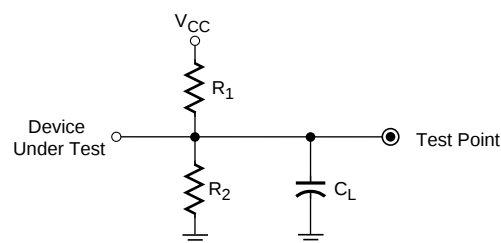

| Output Type | $R_1$          | $R_2$          | $C_L$ |
|-------------|----------------|----------------|-------|
| LVTTL33     | 268 $\Omega$   | 235 $\Omega$   | 35 pF |
| LVC MOS33   | 275 $\Omega$   | 275 $\Omega$   | 35 pF |
| LVC MOS25   | 188 $\Omega$   | 188 $\Omega$   | 35 pF |
| LVC MOS18   | 112.5 $\Omega$ | 112.5 $\Omega$ | 35 pF |
| LVC MOS15   | 150 $\Omega$   | 150 $\Omega$   | 35 pF |

$C_L$  includes test fixtures and probe capacitance.  
1.5 nsec maximum rise/fall times on inputs.

DS\_ACT\_08\_14\_02

Figure 3: Load Circuit

## Typical I/O Output Curves

The I/V curve illustrates the nominal amount of current that an I/O can source/sink at different voltage levels.

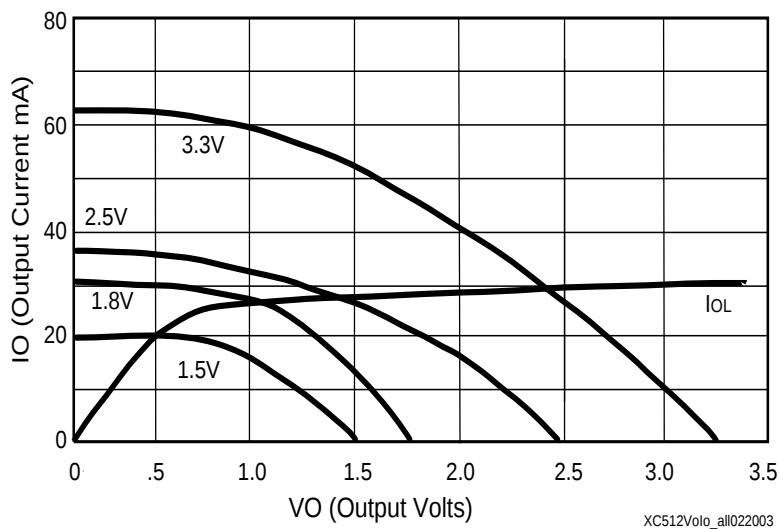


Figure 4: Typical I/V Curves for XC2C512

## Pin Descriptions

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 1(GTS0)        | 1          | 7     | D4    | C1    | 2        |
| 1              | 2          | 6     | B2    | C2    | 2        |
| 1(GTS3)        | 3          | 5     | E3    | B1    | 2        |
| 1              | 4          | 4     | C3    | B2    | 2        |
| 1              | 5          | -     | -     | -     | -        |
| 1              | 6          | -     | -     | -     | -        |
| 1              | 7          | -     | -     | -     | -        |
| 1              | 8          | -     | -     | -     | -        |
| 1              | 9          | -     | -     | -     | -        |
| 1              | 10         | -     | -     | -     | -        |
| 1              | 11         | -     | -     | -     | -        |
| 1              | 12         | -     | -     | -     | -        |
| 1(GTS2)        | 13         | 3     | D3    | D3    | 2        |
| 1              | 14         | 2     | B3    | C3    | 2        |
| 1              | 15         | 208   | B4    | A1    | 2        |
| 1(GSR)         | 16         | 206   | C4    | A2    | 2        |
| 2              | 1          | -     | A1    | D2    | 2        |
| 2              | 2          | 8     | -     | D1    | 2        |
| 2              | 3          | -     | D2    | F4    | 2        |
| 2              | 4          | -     | -     | F3    | 2        |
| 2              | 5          | -     | -     | -     | -        |
| 2              | 6          | -     | -     | -     | -        |
| 2              | 7          | -     | -     | -     | -        |
| 2              | 8          | -     | -     | -     | -        |
| 2              | 9          | -     | -     | -     | -        |
| 2              | 10         | -     | -     | -     | -        |
| 2              | 11         | -     | -     | -     | -        |
| 2              | 12         | -     | -     | -     | -        |
| 2              | 13         | -     | C2    | E2    | 2        |
| 2(GTS1)        | 14         | 9     | E5    | E1    | 2        |
| 2              | 15         | 10    | B1    | F2    | 2        |
| 2              | 16         | 12    | E4    | G4    | 2        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 3              | 1          | 205   | -     | B3    | 2        |
| 3              | 2          | -     | A2    | C4    | 2        |
| 3              | 3          | 203   | -     | B4    | 2        |
| 3              | 4          | -     | C5    | C5    | 2        |
| 3              | 5          | 202   | A3    | B5    | 2        |
| 3              | 6          | -     | -     | -     | -        |
| 3              | 7          | -     | -     | -     | -        |
| 3              | 8          | -     | -     | -     | -        |
| 3              | 9          | -     | -     | -     | -        |
| 3              | 10         | -     | -     | -     | -        |
| 3              | 11         | -     | -     | -     | -        |
| 3              | 12         | -     | -     | -     | -        |
| 3              | 13         | 201   | E7    | A3    | 2        |
| 3              | 14         | -     | A4    | A4    | 2        |
| 3              | 15         | 200   | C6    | D6    | 2        |
| 3              | 16         | 199   | B5    | A5    | 2        |
| 4              | 1          | -     | C1    | G3    | 2        |
| 4              | 2          | 14    | E2    | G2    | 2        |
| 4              | 3          | -     | F2    | G1    | 2        |
| 4              | 4          | 15    | E6    | H4    | 2        |
| 4              | 5          | -     | -     | -     | -        |
| 4              | 6          | -     | -     | -     | -        |
| 4              | 7          | -     | -     | -     | -        |
| 4              | 8          | -     | -     | -     | -        |
| 4              | 9          | -     | -     | -     | -        |
| 4              | 10         | -     | -     | -     | -        |
| 4              | 11         | -     | -     | -     | -        |
| 4              | 12         | -     | -     | -     | -        |
| 4              | 13         | -     | F3    | H3    | 2        |
| 4              | 14         | 16    | D1    | H2    | 2        |
| 4              | 15         | 17    | G4    | H1    | 2        |
| 4              | 16         | 18    | E1    | J4    | 2        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 5              | 1          | 198   | D6    | C6    | 2        |
| 5              | 2          | 197   | A5    | B6    | 2        |
| 5              | 3          | 196   | E8    | A6    | 2        |
| 5              | 4          | 195   | B6    | D7    | 2        |
| 5              | 5          | 194   | C7    | C7    | 2        |
| 5              | 6          | -     | -     | -     | -        |
| 5              | 7          | -     | -     | -     | -        |
| 5              | 8          | -     | -     | -     | -        |
| 5              | 9          | -     | -     | -     | -        |
| 5              | 10         | -     | -     | -     | -        |
| 5              | 11         | -     | -     | -     | -        |
| 5              | 12         | -     | -     | -     | -        |
| 5              | 13         | 193   | -     | B7    | 2        |
| 5              | 14         | -     | A6    | A7    | 2        |
| 5              | 15         | 192   | D7    | D8    | 2        |
| 5              | 16         | -     | B7    | C8    | 2        |
| 6              | 1          | 19    | G3    | J3    | 2        |
| 6              | 2          | 20    | G2    | J2    | 2        |
| 6              | 3          | 21    | -     | J1    | 2        |
| 6              | 4          | -     | F5    | K4    | 2        |
| 6              | 5          | -     | -     | -     | -        |
| 6              | 6          | -     | -     | -     | -        |
| 6              | 7          | -     | -     | -     | -        |
| 6              | 8          | -     | -     | -     | -        |
| 6              | 9          | -     | -     | -     | -        |
| 6              | 10         | -     | -     | -     | -        |
| 6              | 11         | -     | -     | -     | -        |
| 6              | 12         | -     | -     | -     | -        |
| 6              | 13         | -     | -     | K3    | 2        |
| 6              | 14         | -     | F1    | K2    | 2        |
| 6              | 15         | -     | -     | K1    | 2        |
| 6              | 16         | -     | G5    | L1    | 2        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 7              | 1          | 191   | -     | B8    | 2        |
| 7              | 2          | -     | E9    | A8    | 2        |
| 7              | 3          | 189   | A7    | D9    | 2        |
| 7              | 4          | 188   | D8    | C9    | 2        |
| 7              | 5          | 187   | B8    | B9    | 2        |
| 7              | 6          | -     | -     | -     | -        |
| 7              | 7          | -     | -     | -     | -        |
| 7              | 8          | -     | -     | -     | -        |
| 7              | 9          | -     | -     | -     | -        |
| 7              | 10         | -     | -     | -     | -        |
| 7              | 11         | -     | -     | -     | -        |
| 7              | 12         | -     | -     | -     | -        |
| 7              | 13         | 186   | C8    | A9    | 2        |
| 7              | 14         | 185   | A8    | D10   | 2        |
| 7              | 15         | 184   | E11   | C10   | 2        |
| 7              | 16         | 183   | E10   | B10   | 2        |
| 8              | 1          | -     | H2    | L4    | 2        |
| 8              | 2          | 22    | -     | L3    | 2        |
| 8              | 3          | 23    | H4    | L2    | 2        |
| 8              | 4          | -     | -     | M1    | 2        |
| 8              | 5          | -     | -     | -     | -        |
| 8              | 6          | -     | -     | -     | -        |
| 8              | 7          | -     | -     | -     | -        |
| 8              | 8          | -     | -     | -     | -        |
| 8              | 9          | -     | -     | -     | -        |
| 8              | 10         | -     | -     | -     | -        |
| 8              | 11         | -     | -     | -     | -        |
| 8              | 12         | -     | -     | -     | -        |
| 8              | 13         | -     | G1    | M2    | 2        |
| 8              | 14         | 25    | H3    | M3    | 2        |
| 8              | 15         | -     | H1    | M4    | 2        |
| 8              | 16         | -     | H5    | N1    | 2        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 9              | 1          | -     | -     | AA2   | 1        |
| 9              | 2          | 50    | N3    | AB1   | 1        |
| 9              | 3          | 49    | -     | AA1   | 1        |
| 9              | 4          | 48    | -     | W4    | 1        |
| 9              | 5          | -     | -     | -     | -        |
| 9              | 6          | -     | -     | -     | -        |
| 9              | 7          | -     | -     | -     | -        |
| 9              | 8          | -     | -     | -     | -        |
| 9              | 9          | -     | -     | -     | -        |
| 9              | 10         | -     | -     | -     | -        |
| 9              | 11         | -     | -     | -     | -        |
| 9              | 12         | -     | -     | -     | -        |
| 9              | 13         | -     | R1    | Y3    | 1        |
| 9              | 14         | 47    | N4    | Y2    | 1        |
| 9              | 15         | -     | N2    | W3    | 1        |
| 9(GCK1)        | 16         | 46    | M3    | Y1    | 1        |
| 10(CDRST)      | 1          | 51    | P2    | AB2   | 1        |
| 10             | 2          | 54    | P4    | Y4    | 1        |
| 10(GCK2)       | 3          | 55    | P5    | AB3   | 1        |
| 10             | 4          | 56    | R2    | AA4   | 1        |
| 10             | 5          | -     | -     | -     | -        |
| 10             | 6          | -     | -     | -     | -        |
| 10             | 7          | -     | -     | -     | -        |
| 10             | 8          | -     | -     | -     | -        |
| 10             | 9          | -     | -     | -     | -        |
| 10             | 10         | -     | -     | -     | -        |
| 10             | 11         | -     | -     | -     | -        |
| 10             | 12         | -     | -     | -     | -        |
| 10             | 13         | 57    | T1    | Y5    | 1        |
| 10(DGE)        | 14         | 58    | T2    | AA5   | 1        |
| 10             | 15         | -     | -     | AB4   | 1        |
| 10             | 16         | -     | N5    | W6    | 1        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 11             | 1          | 45    | P1    | W2    | 1        |
| 11             | 2          | -     | M4    | W1    | 1        |
| 11(GCK0)       | 3          | 44    | M2    | V3    | 1        |
| 11             | 4          | 43    | L3    | U4    | 1        |
| 11             | 5          | -     | -     | -     | -        |
| 11             | 6          | -     | -     | -     | -        |
| 11             | 7          | -     | -     | -     | -        |
| 11             | 8          | -     | -     | -     | -        |
| 11             | 9          | -     | -     | -     | -        |
| 11             | 10         | -     | -     | -     | -        |
| 11             | 11         | -     | -     | -     | -        |
| 11             | 12         | -     | -     | -     | -        |
| 11             | 13         | 41    | N1    | V2    | 1        |
| 11             | 14         | 40    | L4    | V1    | 1        |
| 11             | 15         | 39    | M1    | U3    | 1        |
| 11             | 16         | 38    | L5    | U2    | 1        |
| 12             | 1          | 60    | R4    | AB5   | 1        |
| 12             | 2          | 61    | M5    | Y6    | 1        |
| 12             | 3          | 62    | R5    | AA6   | 1        |
| 12             | 4          | 63    | R6    | AB6   | 1        |
| 12             | 5          | 64    | -     | W7    | 1        |
| 12             | 6          | -     | -     | -     | -        |
| 12             | 7          | -     | -     | -     | -        |
| 12             | 8          | -     | -     | -     | -        |
| 12             | 9          | -     | -     | -     | -        |
| 12             | 10         | -     | -     | -     | -        |
| 12             | 11         | -     | -     | -     | -        |
| 12             | 12         | -     | -     | -     | -        |
| 12             | 13         | 65    | N6    | Y7    | 1        |
| 12             | 14         | 66    | -     | AA7   | 1        |
| 12             | 15         | 67    | R3    | AB7   | 1        |
| 12             | 16         | -     | -     | W8    | 1        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 13             | 1          | 37    | -     | U1    | 1        |
| 13             | 2          | -     | K4    | T4    | 1        |
| 13             | 3          | 36    | L2    | T3    | 1        |
| 13             | 4          | 35    | -     | T2    | 1        |
| 13             | 5          | -     | -     | -     | -        |
| 13             | 6          | -     | -     | -     | -        |
| 13             | 7          | -     | -     | -     | -        |
| 13             | 8          | -     | -     | -     | -        |
| 13             | 9          | -     | -     | -     | -        |
| 13             | 10         | -     | -     | -     | -        |
| 13             | 11         | -     | -     | -     | -        |
| 13             | 12         | -     | -     | -     | -        |
| 13             | 13         | -     | K3    | T1    | 1        |
| 13             | 14         | 34    | L1    | R4    | 1        |
| 13             | 15         | 32    | K5    | R3    | 1        |
| 13             | 16         | -     | K2    | R2    | 1        |
| 14             | 1          | -     | M6    | Y8    | 1        |
| 14             | 2          | -     | -     | AA8   | 1        |
| 14             | 3          | 69    | T3    | AB8   | 1        |
| 14             | 4          | 70    | P6    | W9    | 1        |
| 14             | 5          | 71    | T4    | Y9    | 1        |
| 14             | 6          | -     | -     | -     | -        |
| 14             | 7          | -     | -     | -     | -        |
| 14             | 8          | -     | -     | -     | -        |
| 14             | 9          | -     | -     | -     | -        |
| 14             | 10         | -     | -     | -     | -        |
| 14             | 11         | -     | -     | -     | -        |
| 14             | 12         | -     | -     | -     | -        |
| 14             | 13         | 72    | P7    | AA9   | 1        |
| 14             | 14         | -     | -     | AB9   | 1        |
| 14             | 15         | 73    | T5    | W10   | 1        |
| 14             | 16         | -     | -     | Y10   | 1        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 15             | 1          | 31    | J4    | R1    | 1        |
| 15             | 2          | -     | K1    | P4    | 1        |
| 15             | 3          | 30    | J3    | P3    | 1        |
| 15             | 4          | 29    | J2    | P2    | 1        |
| 15             | 5          | -     | -     | -     | -        |
| 15             | 6          | -     | -     | -     | -        |
| 15             | 7          | -     | -     | -     | -        |
| 15             | 8          | -     | -     | -     | -        |
| 15             | 9          | -     | -     | -     | -        |
| 15             | 10         | -     | -     | -     | -        |
| 15             | 11         | -     | -     | -     | -        |
| 15             | 12         | -     | -     | -     | -        |
| 15             | 13         | 28    | J5    | P1    | 1        |
| 15             | 14         | 27    | J1    | N4    | 1        |
| 15             | 15         | -     | -     | N3    | 1        |
| 15             | 16         | -     | -     | N2    | 1        |
| 16             | 1          | 74    | N7    | AA10  | 1        |
| 16             | 2          | -     | -     | AB10  | 1        |
| 16             | 3          | 75    | R7    | AB11  | 1        |
| 16             | 4          | 76    | M7    | W11   | 1        |
| 16             | 5          | 77    | T6    | AA11  | 1        |
| 16             | 6          | -     | -     | -     | -        |
| 16             | 7          | -     | -     | -     | -        |
| 16             | 8          | -     | -     | -     | -        |
| 16             | 9          | -     | -     | -     | -        |
| 16             | 10         | -     | -     | -     | -        |
| 16             | 11         | -     | -     | -     | -        |
| 16             | 12         | -     | -     | -     | -        |
| 16             | 13         | -     | -     | Y11   | 1        |
| 16             | 14         | 78    | -     | AB12  | 1        |
| 16             | 15         | -     | -     | AA12  | 1        |
| 16             | 16         | -     | -     | Y12   | 1        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 17             | 1          | 161   | A16   | A21   | 4        |
| 17             | 2          | 162   | B13   | B20   | 4        |
| 17             | 3          | 163   | -     | C19   | 4        |
| 17             | 4          | 164   | -     | B19   | 4        |
| 17             | 5          | 165   | B14   | C18   | 4        |
| 17             | 6          | -     | -     | -     | -        |
| 17             | 7          | -     | -     | -     | -        |
| 17             | 8          | -     | -     | -     | -        |
| 17             | 9          | -     | -     | -     | -        |
| 17             | 10         | -     | -     | -     | -        |
| 17             | 11         | -     | -     | -     | -        |
| 17             | 12         | -     | -     | -     | -        |
| 17             | 13         | 166   | C13   | B18   | 4        |
| 17             | 14         | 167   | A15   | A19   | 4        |
| 17             | 15         | 168   | C12   | D17   | 4        |
| 17             | 16         | 169   | B12   | A18   | 4        |
| 18             | 1          | 160   | B15   | A22   | 4        |
| 18             | 2          | -     | C14   | B21   | 4        |
| 18             | 3          | -     | G11   | B22   | 4        |
| 18             | 4          | 159   | B16   | C20   | 4        |
| 18             | 5          | -     | -     | -     | -        |
| 18             | 6          | -     | -     | -     | -        |
| 18             | 7          | -     | -     | -     | -        |
| 18             | 8          | -     | -     | -     | -        |
| 18             | 9          | -     | -     | -     | -        |
| 18             | 10         | -     | -     | -     | -        |
| 18             | 11         | -     | -     | -     | -        |
| 18             | 12         | -     | -     | -     | -        |
| 18             | 13         | -     | -     | C21   | 4        |
| 18             | 14         | -     | D14   | D19   | 4        |
| 18             | 15         | 158   | -     | D20   | 4        |
| 18             | 16         | -     | C15   | C22   | 4        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 19             | 1          | 170   | D13   | C17   | 4        |
| 19             | 2          | 171   | A14   | B17   | 4        |
| 19             | 3          | 173   | E13   | A17   | 4        |
| 19             | 4          | -     | A13   | D16   | 4        |
| 19             | 5          | -     | C11   | C16   | 4        |
| 19             | 6          | -     | -     | -     | -        |
| 19             | 7          | -     | -     | -     | -        |
| 19             | 8          | -     | -     | -     | -        |
| 19             | 9          | -     | -     | -     | -        |
| 19             | 10         | -     | -     | -     | -        |
| 19             | 11         | -     | -     | -     | -        |
| 19             | 12         | -     | -     | -     | -        |
| 19             | 13         | -     | A12   | B16   | 4        |
| 19             | 14         | -     | B11   | A16   | 4        |
| 19             | 15         | -     | D11   | D15   | 4        |
| 19             | 16         | -     | A11   | C15   | 4        |
| 20             | 1          | -     | G12   | D21   | 4        |
| 20             | 2          | -     | D15   | D22   | 4        |
| 20             | 3          | 155   | E14   | E20   | 4        |
| 20             | 4          | 154   | C16   | F19   | 4        |
| 20             | 5          | -     | -     | -     | -        |
| 20             | 6          | -     | -     | -     | -        |
| 20             | 7          | -     | -     | -     | -        |
| 20             | 8          | -     | -     | -     | -        |
| 20             | 9          | -     | -     | -     | -        |
| 20             | 10         | -     | -     | -     | -        |
| 20             | 11         | -     | -     | -     | -        |
| 20             | 12         | -     | -     | -     | -        |
| 20             | 13         | 153   | F14   | E21   | 4        |
| 20             | 14         | 152   | D16   | E22   | 4        |
| 20             | 15         | 151   | F13   | F20   | 4        |
| 20             | 16         | 150   | E15   | F21   | 4        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 21             | 1          | -     | D10   | B15   | 4        |
| 21             | 2          | 174   | B10   | A15   | 4        |
| 21             | 3          | 175   | E12   | D14   | 4        |
| 21             | 4          | -     | F12   | B14   | 4        |
| 21             | 5          | 178   | -     | A14   | 4        |
| 21             | 6          | -     | -     | -     | -        |
| 21             | 7          | -     | -     | -     | -        |
| 21             | 8          | -     | -     | -     | -        |
| 21             | 9          | -     | -     | -     | -        |
| 21             | 10         | -     | -     | -     | -        |
| 21             | 11         | -     | -     | -     | -        |
| 21             | 12         | -     | -     | -     | -        |
| 21             | 13         | -     | -     | D13   | 4        |
| 21             | 14         | -     | -     | C13   | 4        |
| 21             | 15         | -     | -     | B13   | 4        |
| 21             | 16         | -     | -     | A13   | 4        |
| 22             | 1          | 149   | G13   | F22   | 4        |
| 22             | 2          | 148   | F15   | G19   | 4        |
| 22             | 3          | 147   | G14   | G20   | 4        |
| 22             | 4          | 146   | E16   | G21   | 4        |
| 22             | 5          | -     | -     | -     | -        |
| 22             | 6          | -     | -     | -     | -        |
| 22             | 7          | -     | -     | -     | -        |
| 22             | 8          | -     | -     | -     | -        |
| 22             | 9          | -     | -     | -     | -        |
| 22             | 10         | -     | -     | -     | -        |
| 22             | 11         | -     | -     | -     | -        |
| 22             | 12         | -     | -     | -     | -        |
| 22             | 13         | 145   | H12   | G22   | 4        |
| 22             | 14         | 144   | F16   | H19   | 4        |
| 22             | 15         | 143   | H16   | H20   | 4        |
| 22             | 16         | 142   | -     | H21   | 4        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 23             | 1          | 179   | B9    | A12   | 4        |
| 23             | 2          | 180   | -     | D12   | 4        |
| 23             | 3          | -     | C9    | B12   | 4        |
| 23             | 4          | 182   | -     | C12   | 4        |
| 23             | 5          | -     | C10   | A11   | 4        |
| 23             | 6          | -     | -     | -     | -        |
| 23             | 7          | -     | -     | -     | -        |
| 23             | 8          | -     | -     | -     | -        |
| 23             | 9          | -     | -     | -     | -        |
| 23             | 10         | -     | -     | -     | -        |
| 23             | 11         | -     | -     | -     | -        |
| 23             | 12         | -     | -     | -     | -        |
| 23             | 13         | -     | -     | B11   | 4        |
| 23             | 14         | -     | A9    | C11   | 4        |
| 23             | 15         | -     | -     | D11   | 4        |
| 23             | 16         | -     | D9    | A10   | 4        |
| 24             | 1          | 140   | G15   | H22   | 4        |
| 24             | 2          | 139   | H13   | J19   | 4        |
| 24             | 3          | 138   | G16   | J20   | 4        |
| 24             | 4          | 137   | H14   | J21   | 4        |
| 24             | 5          | -     | -     | -     | -        |
| 24             | 6          | -     | -     | -     | -        |
| 24             | 7          | -     | -     | -     | -        |
| 24             | 8          | -     | -     | -     | -        |
| 24             | 9          | -     | -     | -     | -        |
| 24             | 10         | -     | -     | -     | -        |
| 24             | 11         | -     | -     | -     | -        |
| 24             | 12         | -     | -     | -     | -        |
| 24             | 13         | 136   | H15   | J22   | 4        |
| 24             | 14         | 135   | J12   | K19   | 4        |
| 24             | 15         | 134   | K12   | K20   | 4        |
| 24             | 16         | -     | J16   | K21   | 4        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 25             | 1          | 110   | R16   | W22   | 3        |
| 25             | 2          | 111   | N15   | V20   | 3        |
| 25             | 3          | 112   | M15   | V21   | 3        |
| 25             | 4          | 113   | M13   | U19   | 3        |
| 25             | 5          | -     | -     | -     | -        |
| 25             | 6          | -     | -     | -     | -        |
| 25             | 7          | -     | -     | -     | -        |
| 25             | 8          | -     | -     | -     | -        |
| 25             | 9          | -     | -     | -     | -        |
| 25             | 10         | -     | -     | -     | -        |
| 25             | 11         | -     | -     | -     | -        |
| 25             | 12         | -     | -     | -     | -        |
| 25             | 13         | 114   | P16   | V22   | 3        |
| 25             | 14         | 115   | N16   | U20   | 3        |
| 25             | 15         | 116   | L14   | U21   | 3        |
| 25             | 16         | 117   | M14   | U22   | 3        |
| 26             | 1          | 109   | N14   | Y22   | 3        |
| 26             | 2          | 108   | T16   | W21   | 3        |
| 26             | 3          | 107   | R15   | W20   | 3        |
| 26             | 4          | 106   | P15   | Y21   | 3        |
| 26             | 5          | -     | P14   | Y20   | 3        |
| 26             | 6          | -     | -     | -     | -        |
| 26             | 7          | -     | -     | -     | -        |
| 26             | 8          | -     | -     | -     | -        |
| 26             | 9          | -     | -     | -     | -        |
| 26             | 10         | -     | -     | -     | -        |
| 26             | 11         | -     | -     | -     | -        |
| 26             | 12         | -     | -     | -     | -        |
| 26             | 13         | 103   | P13   | AA22  | 3        |
| 26             | 14         | 102   | R13   | AB22  | 3        |
| 26             | 15         | 101   | N13   | AA21  | 3        |
| 26             | 16         | 100   | R14   | AB21  | 3        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 27             | 1          | 118   | L15   | T19   | 3        |
| 27             | 2          | -     | L13   | T20   | 3        |
| 27             | 3          | 119   | M12   | T21   | 3        |
| 27             | 4          | 120   | M16   | T22   | 3        |
| 27             | 5          | -     | -     | -     | -        |
| 27             | 6          | -     | -     | -     | -        |
| 27             | 7          | -     | -     | -     | -        |
| 27             | 8          | -     | -     | -     | -        |
| 27             | 9          | -     | -     | -     | -        |
| 27             | 10         | -     | -     | -     | -        |
| 27             | 11         | -     | -     | -     | -        |
| 27             | 12         | -     | -     | -     | -        |
| 27             | 13         | -     | K14   | R19   | 3        |
| 27             | 14         | -     | -     | R20   | 3        |
| 27             | 15         | 121   | -     | R21   | 3        |
| 27             | 16         | -     | -     | R22   | 3        |
| 28             | 1          | 99    | T15   | W19   | 3        |
| 28             | 2          | 97    | R12   | AA20  | 3        |
| 28             | 3          | 95    | T14   | Y18   | 3        |
| 28             | 4          | -     | N11   | AA19  | 3        |
| 28             | 5          | -     | P11   | W17   | 3        |
| 28             | 6          | -     | -     | -     | -        |
| 28             | 7          | -     | -     | -     | -        |
| 28             | 8          | -     | -     | -     | -        |
| 28             | 9          | -     | -     | -     | -        |
| 28             | 10         | -     | -     | -     | -        |
| 28             | 11         | -     | -     | -     | -        |
| 28             | 12         | -     | -     | -     | -        |
| 28             | 13         | -     | M11   | Y17   | 3        |
| 28             | 14         | -     | T13   | AA18  | 3        |
| 28             | 15         | -     | N10   | AB18  | 3        |
| 28             | 16         | -     | -     | AA17  | 3        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 29             | 1          | -     | L16   | P19   | 3        |
| 29             | 2          | -     | -     | P20   | 3        |
| 29             | 3          | 122   | -     | P21   | 3        |
| 29             | 4          | 123   | -     | P22   | 3        |
| 29             | 5          | -     | -     | -     | -        |
| 29             | 6          | -     | -     | -     | -        |
| 29             | 7          | -     | -     | -     | -        |
| 29             | 8          | -     | -     | -     | -        |
| 29             | 9          | -     | -     | -     | -        |
| 29             | 10         | -     | -     | -     | -        |
| 29             | 11         | -     | -     | -     | -        |
| 29             | 12         | -     | -     | -     | -        |
| 29             | 13         | -     | -     | N19   | 3        |
| 29             | 14         | 125   | K15   | N21   | 3        |
| 29             | 15         | -     | L12   | N22   | 3        |
| 29             | 16         | -     | -     | M22   | 3        |
| 30             | 1          | -     | -     | AB17  | 3        |
| 30             | 2          | 91    | T12   | W16   | 3        |
| 30             | 3          | 90    | P10   | Y16   | 3        |
| 30             | 4          | 89    | T11   | AA16  | 3        |
| 30             | 5          | -     | R10   | AB16  | 3        |
| 30             | 6          | -     | -     | -     | -        |
| 30             | 7          | -     | -     | -     | -        |
| 30             | 8          | -     | -     | -     | -        |
| 30             | 9          | -     | -     | -     | -        |
| 30             | 10         | -     | -     | -     | -        |
| 30             | 11         | -     | -     | -     | -        |
| 30             | 12         | -     | -     | -     | -        |
| 30             | 13         | 88    | M10   | W15   | 3        |
| 30             | 14         | 87    | T10   | Y15   | 3        |
| 30             | 15         | -     | M9    | AA15  | 3        |
| 30             | 16         | 86    | R9    | AB15  | 3        |

## Pin Descriptions (Continued)

| Function Block | Macro-cell | PQ208 | FT256 | FG324 | I/O Bank |
|----------------|------------|-------|-------|-------|----------|
| 31             | 1          | 126   | K16   | M19   | 3        |
| 31             | 2          | -     | -     | M20   | 3        |
| 31             | 3          | 127   | -     | M21   | 3        |
| 31             | 4          | 128   | J14   | L22   | 3        |
| 31             | 5          | -     | -     | -     | -        |
| 31             | 6          | -     | -     | -     | -        |
| 31             | 7          | -     | -     | -     | -        |
| 31             | 8          | -     | -     | -     | -        |
| 31             | 9          | -     | -     | -     | -        |
| 31             | 10         | -     | -     | -     | -        |
| 31             | 11         | -     | -     | -     | -        |
| 31             | 12         | -     | -     | -     | -        |
| 31             | 13         | -     | -     | L21   | 3        |
| 31             | 14         | -     | J15   | L20   | 3        |
| 31             | 15         | -     | -     | L19   | 3        |
| 31             | 16         | 131   | J13   | K22   | 3        |
| 32             | 1          | 85    | P9    | W14   | 3        |
| 32             | 2          | 84    | N9    | Y14   | 3        |
| 32             | 3          | -     | T9    | AA14  | 3        |
| 32             | 4          | 83    | M8    | AB14  | 3        |
| 32             | 5          | -     | T8    | W13   | 3        |
| 32             | 6          | -     | -     | -     | -        |
| 32             | 7          | -     | -     | -     | -        |
| 32             | 8          | -     | -     | -     | -        |
| 32             | 9          | -     | -     | -     | -        |
| 32             | 10         | -     | -     | -     | -        |
| 32             | 11         | -     | -     | -     | -        |
| 32             | 12         | -     | -     | -     | -        |
| 32             | 13         | 82    | P8    | Y13   | 3        |
| 32             | 14         | 80    | R8    | AA13  | 3        |
| 32             | 15         | -     | T7    | AB13  | 3        |
| 32             | 16         | -     | N8    | W12   | 3        |

### Notes:

1. GTS = global output enable, GSR = global reset/set, GCK = global clock, CDRST = clock divide reset, DGE = DataGATE enable.
2. GCK, GSR, and GTS pins can also be used for general purpose I/O.

## XC2C512 JTAG, Power/Ground, No Connect Pins and Total User I/O

| Pin Type                                     | PQ208                                                              | FT256                                                                                | FG324                                                                                                                                |
|----------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| TCK                                          | 98                                                                 | P12                                                                                  | Y19                                                                                                                                  |
| TDI                                          | 94                                                                 | R11                                                                                  | AB19                                                                                                                                 |
| TDO                                          | 176                                                                | A10                                                                                  | C14                                                                                                                                  |
| TMS                                          | 96                                                                 | N12                                                                                  | AB20                                                                                                                                 |
| V <sub>CCAUX</sub> (JTAG supply voltage)     | 11                                                                 | F4                                                                                   | F1                                                                                                                                   |
| Power internal (V <sub>CC</sub> )            | 1, 53, 124                                                         | P3, K13, D12, D5                                                                     | E3, AA3, N20, A20, D4                                                                                                                |
| Power Bank 1 I/O (V <sub>CCIO1</sub> )       | 33, 59, 79                                                         | J6, K6, L7, L8                                                                       | M9, N9, P10, P11                                                                                                                     |
| Power Bank 2 I/O (V <sub>CCIO2</sub> )       | 26, 204                                                            | F7, F8, G6, H6                                                                       | J10, J11, K9, L9                                                                                                                     |
| Power Bank 3 I/O (V <sub>CCIO3</sub> )       | 92, 105, 132                                                       | J11, K11, L9, L10                                                                    | M14, N14, P12, P13                                                                                                                   |
| Power Bank 4 I/O (V <sub>CCIO4</sub> )       | 133, 157, 172, 181                                                 | F9, F10, H11                                                                         | J12, J13, K14, L14                                                                                                                   |
| Ground                                       | 13, 24, 42, 52, 68, 81, 93, 104, 129, 130, 141, 156, 177, 190, 207 | F6, F11, G7, G8, G9, G10, H7, H8, H9, H10, J7, J8, J9, J10, K7, K8, K9, K10, L6, L11 | D5, D18, E4, E19, J9, J14, K10, K11, K12, K13, L10, L11, L12, L13, M10, M11, M12, M13, N10, N11, N12, N13, P9, P14, V4, V19, W5, W18 |
| No connects                                  | -                                                                  | -                                                                                    | -                                                                                                                                    |
| Total user I/O (includes dual function pins) | 173                                                                | 212                                                                                  | 270                                                                                                                                  |

## Device Part Marking

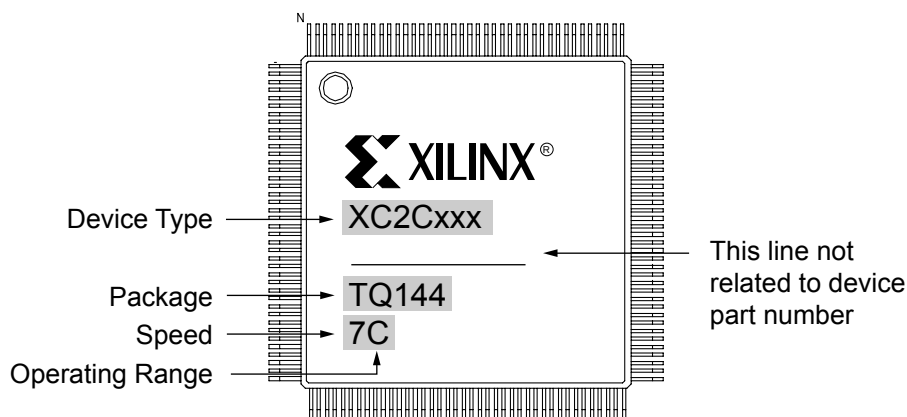


Figure 5: Sample Package with Part Marking

## Ordering Information

| Part Number       | Pin/Ball Spacing | $\theta_{JA}$<br>(C/Watt) | $\theta_{JC}$<br>(C/Watt) | Package Type                    | Package Body Dimensions | I/O | Commercial (C)<br>Industrial (I) <sup>(1)</sup> |
|-------------------|------------------|---------------------------|---------------------------|---------------------------------|-------------------------|-----|-------------------------------------------------|
| XC2C512-7PQ208C   | 0.5mm            | 35.1                      | 7.2                       | Plastic Quad Flat Pack          | 28mm x 28mm             | 173 | C                                               |
| XC2C512-10PQ208C  | 0.5mm            | 35.1                      | 7.2                       | Plastic Quad Flat Pack          | 28mm x 28mm             | 173 | C                                               |
| XC2C512-7FT256C   | 1.0mm            | 32.2                      | 4.9                       | Fine Pitch Thin BGA             | 17mm x 17mm             | 212 | C                                               |
| XC2C512-7FT256I   | 1.0mm            | 32.2                      | 4.9                       | Fine Pitch Thin BGA             | 17mm x 17mm             | 212 | I                                               |
| XC2C512-10FT256C  | 1.0mm            | 32.2                      | 4.9                       | Fine Pitch Thin BGA             | 17mm x 17mm             | 212 | C                                               |
| XC2C512-7FG324C   | 1.0mm            | 39.1                      | 5.0                       | Fine Pitch BGA                  | 23mm x 23mm             | 270 | C                                               |
| XC2C512-10FG324C  | 1.0mm            | 39.1                      | 5.0                       | Fine Pitch BGA                  | 23mm x 23mm             | 270 | C                                               |
| XC2C512-7PQG208C  | 0.5mm            | 35.1                      | 7.2                       | Plastic Quad Flat Pack; Pb-free | 28mm x 28mm             | 173 | C                                               |
| XC2C512-10PQG208C | 0.5mm            | 35.1                      | 7.2                       | Plastic Quad Flat Pack; Pb-free | 28mm x 28mm             | 173 | C                                               |
| XC2C512-7FTG256C  | 1.0mm            | 32.2                      | 4.9                       | Fine Pitch Thin BGA; Pb-free    | 17mm x 17mm             | 212 | C                                               |
| XC2C512-7FTG256I  | 1.0mm            | 32.2                      | 4.9                       | Fine Pitch Thin BGA; Pb-free    | 17mm x 17mm             | 212 | I                                               |
| XC2C512-10FTG256C | 1.0mm            | 32.2                      | 4.9                       | Fine Pitch Thin BGA; Pb-free    | 17mm x 17mm             | 212 | C                                               |
| XC2C512-7FGG324C  | 1.0mm            | 39.1                      | 5.0                       | Fine Pitch BGA; Pb-free         | 23mm x 23mm             | 270 | C                                               |
| XC2C512-10FGG324C | 1.0mm            | 39.1                      | 5.0                       | Fine Pitch BGA; Pb-free         | 23mm x 23mm             | 270 | C                                               |
| XC2C512-10PQ208I  | 0.5mm            | 35.1                      | 7.2                       | Plastic Quad Flat Pack          | 28mm x 28mm             | 173 | I                                               |
| XC2C512-10FT256I  | 1.0mm            | 32.2                      | 4.9                       | Fine Pitch Thin BGA             | 17mm x 17mm             | 212 | I                                               |
| XC2C512-10FG324I  | 1.0mm            | 39.1                      | 5.0                       | Fine Pitch BGA                  | 23mm x 23mm             | 270 | I                                               |
| XC2C512-10PQG208I | 0.5mm            | 35.1                      | 7.2                       | Plastic Quad Flat Pack; Pb-free | 28mm x 28mm             | 173 | I                                               |
| XC2C512-10FTG256I | 1.0mm            | 32.2                      | 4.9                       | Fine Pitch Thin BGA; Pb-free    | 17mm x 17mm             | 212 | I                                               |
| XC2C512-10FGG324I | 1.0mm            | 39.1                      | 5.0                       | Fine Pitch BGA; Pb-free         | 23mm x 23mm             | 270 | I                                               |

### Notes:


1. C = Commercial ( $T_A = 0^\circ\text{C}$  to  $+70^\circ\text{C}$ ); I = Industrial ( $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ ).

Standard Example: XC2C128 -7 TQ 144 C

Device \_\_\_\_\_  
 Speed Grade \_\_\_\_\_  
 Package Type \_\_\_\_\_  
 Number of Pins \_\_\_\_\_  
 Temperature Range \_\_\_\_\_

Pb-Free Example: XC2C128 -7 TQ G 144 C

Device \_\_\_\_\_  
 Speed Grade \_\_\_\_\_  
 Package Type \_\_\_\_\_  
 Pb-Free \_\_\_\_\_  
 Number of Pins \_\_\_\_\_  
 Temperature Range \_\_\_\_\_

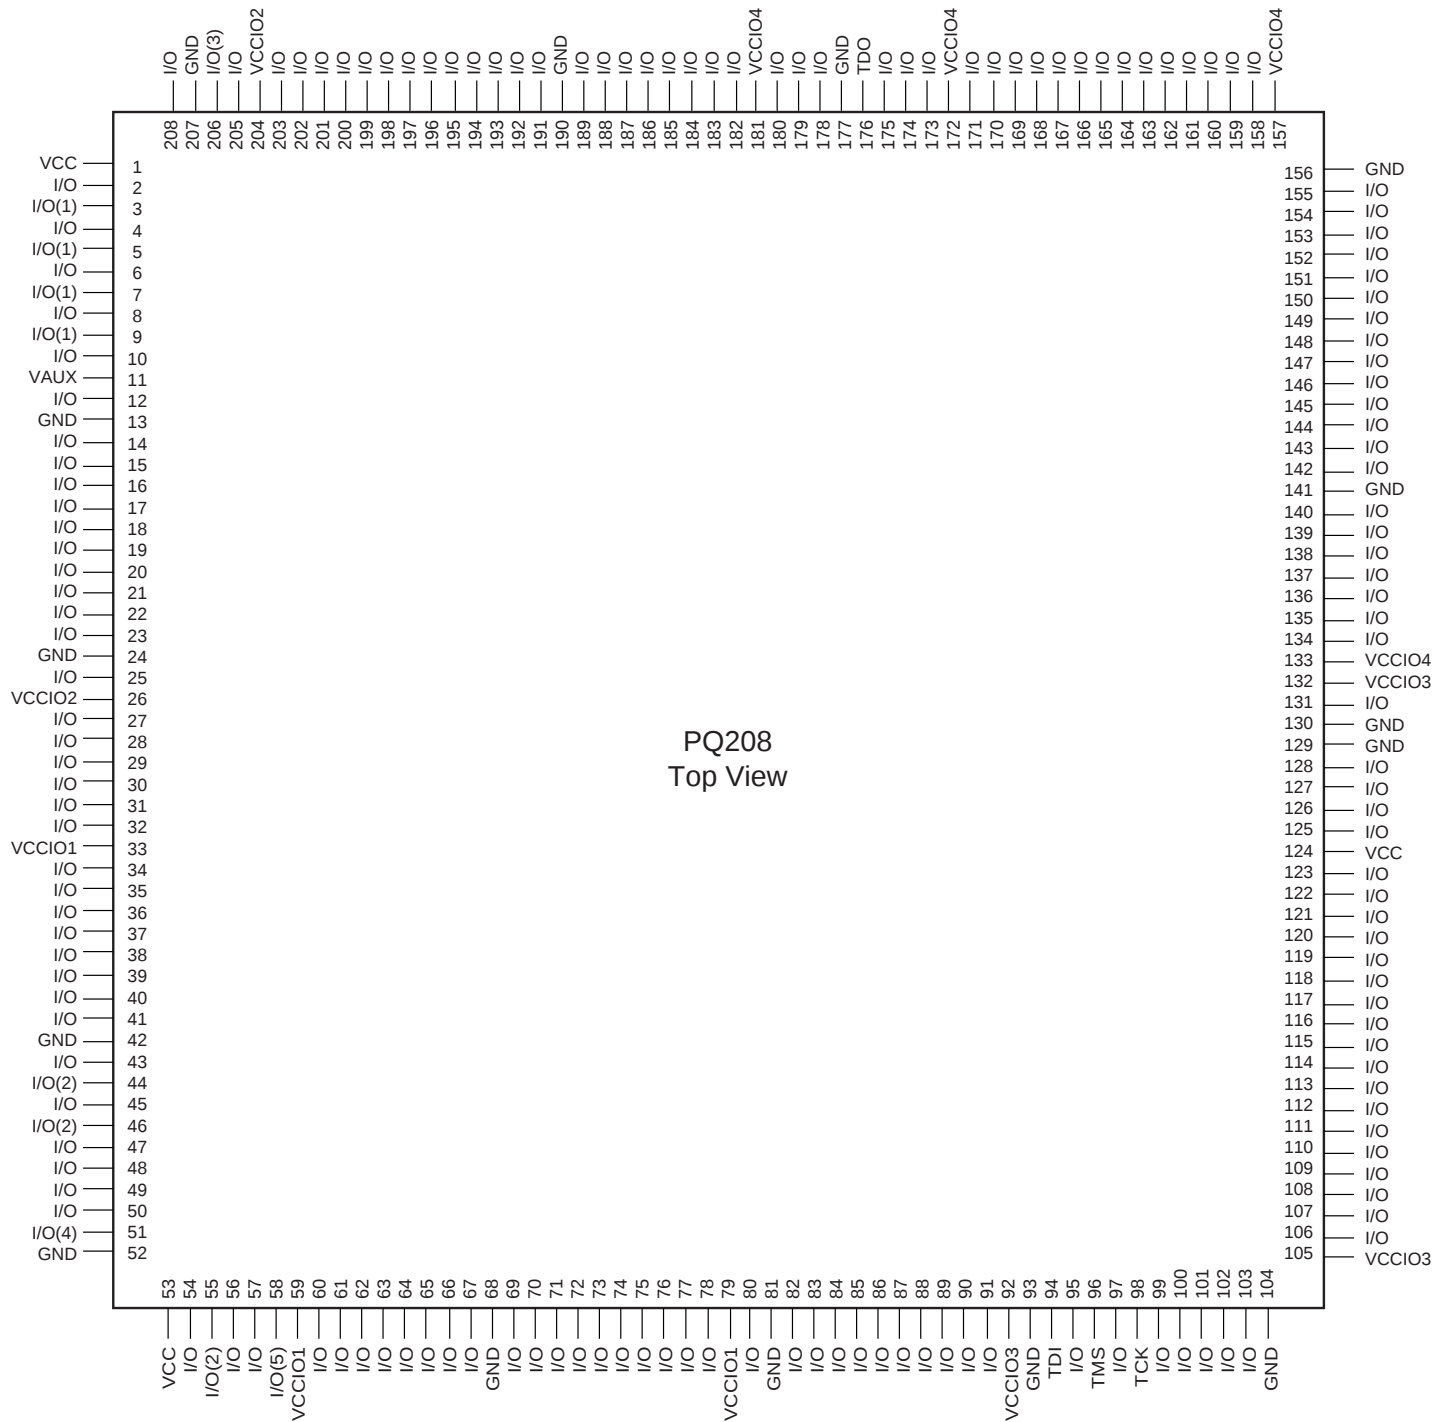

- (1) - Global Output Enable
- (2) - Global Clock
- (3) - Global Set/Reset
- (4) - Clock Divide Reset
- (5) - DataGATE Enable

Figure 6: PQ208 Plastic Quad Flat Pack

| 16  | 15  | 14  | 13  | 12  | 11     | 10     | 9      | 8      | 7      | 6      | 5      | 4      | 3      | 2      | 1   |   |
|-----|-----|-----|-----|-----|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|-----|---|
| I/O | I/O | I/O | I/O | I/O | I/O    | TDO    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O | A |
| I/O | I/O | I/O | I/O | I/O | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O | B |
| I/O | I/O | I/O | I/O | I/O | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O(3) | I/O    | I/O    | I/O | C |
| I/O | I/O | I/O | I/O | VCC | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | VCC    | I/O(1) | I/O(1) | I/O    | I/O | D |
| I/O | I/O | I/O | I/O | I/O | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O(1) | I/O    | I/O(1) | I/O    | I/O | E |
| I/O | I/O | I/O | I/O | I/O | GND    | VCCIO4 | VCCIO4 | VCCIO2 | VCCIO2 | GND    | I/O    | VAUX   | I/O    | I/O    | I/O | F |
| I/O | I/O | I/O | I/O | I/O | I/O    | GND    | GND    | GND    | GND    | VCCIO2 | I/O    | I/O    | I/O    | I/O    | I/O | G |
| I/O | I/O | I/O | I/O | I/O | VCCIO4 | GND    | GND    | GND    | GND    | VCCIO2 | I/O    | I/O    | I/O    | I/O    | I/O | H |
| I/O | I/O | I/O | I/O | I/O | VCCIO3 | GND    | GND    | GND    | GND    | VCCIO1 | I/O    | I/O    | I/O    | I/O    | I/O | J |
| I/O | I/O | I/O | VCC | I/O | VCCIO3 | GND    | GND    | GND    | GND    | VCCIO1 | I/O    | I/O    | I/O    | I/O    | I/O | K |
| I/O | I/O | I/O | I/O | I/O | GND    | VCCIO3 | VCCIO3 | VCCIO1 | VCCIO1 | GND    | I/O    | I/O    | I/O    | I/O    | I/O | L |
| I/O | I/O | I/O | I/O | I/O | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O(2) | I/O(2) | I/O | M |
| I/O | I/O | I/O | I/O | TMS | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O | N |
| I/O | I/O | I/O | I/O | TCK | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O(2) | I/O    | VCC    | I/O(4) | I/O | P |
| I/O | I/O | I/O | I/O | I/O | TDI    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O | R |
| I/O | I/O | I/O | I/O | I/O | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O(5) | I/O | T |

FT256 Bottom View

- (1) - Global Output Enable
- (2) - Global Clock
- (3) - Global Set/Reset
- (4) - Clock Divide Reset
- (5) - DataGATE Enable

Figure 7: FT256 Fine Pitch Thin BGA

|    | 22  | 21  | 20  | 19  | 18  | 17  | 16  | 15  | 14     | 13     | 12     | 11     | 10     | 9      | 8   | 7   | 6   | 5      | 4   | 3      | 2      | 1      |
|----|-----|-----|-----|-----|-----|-----|-----|-----|--------|--------|--------|--------|--------|--------|-----|-----|-----|--------|-----|--------|--------|--------|
| A  | I/O | I/O | VCC | I/O | I/O | I/O | I/O | I/O | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O | I/O | I/O | I/O    | I/O | I/O    | I/O(3) | I/O    |
| B  | I/O | I/O | I/O | I/O | I/O | I/O | I/O | I/O | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O | I/O | I/O | I/O    | I/O | I/O    | I/O    | I/O(1) |
| C  | I/O | I/O | I/O | I/O | I/O | I/O | I/O | I/O | TDO    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O | I/O | I/O | I/O    | I/O | I/O    | I/O    | I/O(1) |
| D  | I/O | I/O | I/O | I/O | GND | I/O | I/O | I/O | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O | I/O | I/O | GND    | VCC | I/O(1) | I/O    | I/O    |
| E  | I/O | I/O | I/O | GND |     |     |     |     |        |        |        |        |        |        |     |     |     |        | GND | VCC    | I/O    | I/O(1) |
| F  | I/O | I/O | I/O | I/O |     |     |     |     |        |        |        |        |        |        |     |     |     |        | I/O | I/O    | I/O    | VAUX   |
| G  | I/O | I/O | I/O | I/O |     |     |     |     |        |        |        |        |        |        |     |     |     |        | I/O | I/O    | I/O    | I/O    |
| H  | I/O | I/O | I/O | I/O |     |     |     |     |        |        |        |        |        |        |     |     |     |        | I/O | I/O    | I/O    | I/O    |
| J  | I/O | I/O | I/O | I/O |     |     |     |     | GND    | VCCIO4 | VCCIO4 | VCCIO2 | VCCIO2 | GND    |     |     |     |        | I/O | I/O    | I/O    | I/O    |
| K  | I/O | I/O | I/O | I/O |     |     |     |     | VCCIO4 | GND    | GND    | GND    | GND    | VCCIO2 |     |     |     |        | I/O | I/O    | I/O    | I/O    |
| L  | I/O | I/O | I/O | I/O |     |     |     |     | VCCIO4 | GND    | GND    | GND    | GND    | VCCIO2 |     |     |     |        | I/O | I/O    | I/O    | I/O    |
| M  | I/O | I/O | I/O | I/O |     |     |     |     | VCCIO3 | GND    | GND    | GND    | GND    | VCCIO1 |     |     |     |        | I/O | I/O    | I/O    | I/O    |
| N  | I/O | I/O | VCC | I/O |     |     |     |     | VCCIO3 | GND    | GND    | GND    | GND    | VCCIO1 |     |     |     |        | I/O | I/O    | I/O    | I/O    |
| P  | I/O | I/O | I/O | I/O |     |     |     |     | GND    | VCCIO3 | VCCIO3 | VCCIO1 | VCCIO1 | GND    |     |     |     |        | I/O | I/O    | I/O    | I/O    |
| R  | I/O | I/O | I/O | I/O |     |     |     |     |        |        |        |        |        |        |     |     |     |        | I/O | I/O    | I/O    | I/O    |
| T  | I/O | I/O | I/O | I/O |     |     |     |     |        |        |        |        |        |        |     |     |     |        | I/O | I/O    | I/O    | I/O    |
| U  | I/O | I/O | I/O | I/O |     |     |     |     |        |        |        |        |        |        |     |     |     |        | I/O | I/O    | I/O    | I/O    |
| V  | I/O | I/O | I/O | GND |     |     |     |     |        |        |        |        |        |        |     |     |     |        | GND | I/O(2) | I/O    | I/O    |
| W  | I/O | I/O | I/O | I/O | GND | I/O | I/O | I/O | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O | I/O | I/O | GND    | I/O | I/O    | I/O    | I/O    |
| Y  | I/O | I/O | I/O | TCK | I/O | I/O | I/O | I/O | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O | I/O | I/O | I/O    | I/O | I/O    | I/O    | I/O(2) |
| AA | I/O | I/O | I/O | I/O | I/O | I/O | I/O | I/O | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O | I/O | I/O | I/O(5) | I/O | VCC    | I/O    | I/O    |
| AB | I/O | I/O | TMS | TDI | I/O | I/O | I/O | I/O | I/O    | I/O    | I/O    | I/O    | I/O    | I/O    | I/O | I/O | I/O | I/O    | I/O | I/O(2) | I/O(4) | I/O    |

FG324 Bottom View

- (1) - Global Output Enable
- (2) - Global Clock
- (3) - Global Set/Reset
- (4) - Clock Divide Reset
- (5) - DataGATE Enable

Figure 8: FG324 Fine Pitch BGA

## Warranty Disclaimer

THESE PRODUCTS ARE SUBJECT TO THE TERMS OF THE XILINX LIMITED WARRANTY WHICH CAN BE VIEWED AT <http://www.xilinx.com/warranty.htm>. THIS LIMITED WARRANTY DOES NOT EXTEND TO ANY USE OF THE PRODUCTS IN AN APPLICATION OR ENVIRONMENT THAT IS NOT WITHIN THE SPECIFICATIONS STATED ON THE THEN-CURRENT XILINX DATA SHEET FOR THE PRODUCTS. PRODUCTS ARE NOT DESIGNED TO BE FAIL-SAFE AND ARE NOT WARRANTED FOR USE IN APPLICATIONS THAT POSE A RISK OF PHYSICAL HARM OR LOSS OF LIFE. USE OF PRODUCTS IN SUCH APPLICATIONS IS FULLY AT THE RISK OF CUSTOMER SUBJECT TO APPLICABLE LAWS AND REGULATIONS.

## Additional Information

Additional information is available for the following CoolRunner-II topics:

- XAPP784: Bulletproof CPLD Design Practices
- XAPP375: Timing Model
- XAPP376: Logic Engine
- XAPP378: Advanced Features
- XAPP382: I/O Characteristics
- XAPP389: Powering CoolRunner-II
- XAPP399: Assigning VREF Pins

To access these and all application notes with their associated reference designs, click the following link and scroll down the page until you find the document you want:

[CoolRunner-II Data Sheets and Application Notes](#)  
[Device Packages](#)

## Revision History

The following table shows the revision history for this document.

| Date     | Version | Revision                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 7/19/02  | 1.0     | Initial Xilinx release.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| 3/15/03  | 2.0     | Added characterization data.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 11/25/03 | 2.1     | Fixed two typos.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 1/26/04  | 2.2     | Updated T <sub>sol</sub> ; added links to Data Sheets and Application Notes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 8/03/04  | 2.3     | Pb-free documentation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 10/01/04 | 2.4     | Add Asynchronous Preset/Reset Pulse Width specification to AC Electrical Characteristics.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 01/30/05 | 2.5     | Change to I <sub>CCSB</sub> MAX for Commercial and Industrial.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| 03/07/05 | 2.6     | Removed -6 speed grade. Modified Table 1, IOSTANDARDS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 03/20/06 | 3.0     | Change to Product Specification. Add warranty Disclaimer. Add note to Pin Descriptions that GCK, GSR, and GTS pins can also be used for general purpose I/O.                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 02/15/07 | 3.1     | Corrections to timing parameters t <sub>DIN</sub> , t <sub>SUD</sub> , t <sub>PSUD</sub> , t <sub>PHD</sub> , t <sub>PH</sub> , t <sub>SLEW18</sub> , t <sub>IN</sub> (HSTL), t <sub>OUT</sub> (SSTL3), and t <sub>Tin</sub> (SSTL3) for -6 speed grade. Corrections to t <sub>DIN</sub> , t <sub>SUD</sub> , t <sub>CO</sub> , t <sub>PSUD</sub> , t <sub>PHD</sub> , and t <sub>PH</sub> for the -7 speed grade. Values now match the software. There were no changes to silicon or characterization. Added XC2C512-7FT256I and XC2C512-7FTG236I packages. Change to V <sub>IH</sub> specification for 2.5V and 1.8V LVCMOS. |
| 03/08/07 | 3.2     | Fixed typo in note for V <sub>IL</sub> for LVCMOS18; removed note for V <sub>IL</sub> for LVCMOS33.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.