

## SP3213 0.09pF 12kV Bidirectional Discrete TVS



### Description

The SP3213 is a bidirectional TVS Diode that provides ultra low capacitance and a high level of protection for electronic equipment that may experience destructive electrostatic discharges (ESD). The typical capacitance of 0.09pF helps ensure signal integrity on the most challenging consumer electronics interfaces such as USB 3.2, 3.1, HDMI 2.1, 2.0, DisplayPort, Thunderbolt, and V-by-One®.

It can safely absorb repetitive ESD strikes at  $\pm 12\text{kV}$  (contact discharge, IEC 61000-4-2) without performance degradation and safely dissipate 2A of 8/20 $\mu\text{s}$  surge current (IEC 61000-4-5 2<sup>nd</sup> edition).

### Pinout



### Features

- ESD, IEC 61000-4-2,  $\pm 12\text{kV}$  contact,  $\pm 18\text{kV}$  air
- EFT, IEC 61000-4-4, 40A (5/50ns)
- Lightning, 2A (8/20 as defined in IEC 61000-4-5 2<sup>nd</sup> Edition)
- Low leakage current of 0.02 $\mu\text{A}$ (TYP) at 5V
- Space efficient 0201 footprint
- AEC-Q101 qualified
- Halogen free, lead free and RoHS compliant
- Moisture Sensitivity Level(MSL -1)

### Functional Block Diagram



### Applications

- Ultra-high speed data lines
- USB 3.2, 3.1, 3.0, and 2.0
- HDMI 2.1, 2.0, 1.4a, 1.3
- DisplayPort(TM)
- Thunderbolt (Light Peak)
- V-by-One®
- LVDS interfaces
- Consumer, mobile and portable electronics
- Tablet PC and external storage with high speed interfaces

Life Support Note:

#### Not Intended for Use in Life Support or Life Saving Applications

The products shown herein are not designed for use in life sustaining or life saving applications unless otherwise expressly indicated.

### Absolute Maximum Ratings

| Symbol     | Parameter                              | Value      | Units |
|------------|----------------------------------------|------------|-------|
| $I_{PP}$   | Peak Pulse Current ( $t_p=8/20\mu s$ ) | 2          | A     |
| $T_{OP}$   | Operating Temperature                  | -40 to 125 | °C    |
| $T_{STOR}$ | Storage Temperature                    | -55 to 150 | °C    |

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the component. This is a stress only rating and operation of the component at these or any other conditions above those indicated in the operational sections of this specification is not implied.


### Electrical Characteristics ( $T_{OP}=25^{\circ}C$ )

| Parameter                          | Symbol         | Test Conditions                            | Min      | Typ  | Max | Units    |
|------------------------------------|----------------|--------------------------------------------|----------|------|-----|----------|
| Reverse Standoff Voltage           | $V_{RWM}$      | $I_R=1\mu A$ , I/O to I/O                  |          |      | 5   | V        |
| Breakdown Voltage                  | $V_{BR}$       | $I_R=1mA$ , I/O to I/O                     | 6.2      | 7.5  |     | V        |
| Reverse Leakage Current            | $I_{LEAK}$     | $V_R=5V$                                   |          | 0.02 | 0.1 | $\mu A$  |
| Clamp Voltage <sup>1</sup>         | $V_C$          | $I_{pp}=1A$ , $t_p=8/20\mu s$ , I/O to I/O |          | 12   | 15  | V        |
|                                    |                | $I_{pp}=2A$ , $t_p=8/20\mu s$ , I/O to I/O |          | 14.5 | 18  | V        |
| Dynamic Resistance <sup>2</sup>    | $R_{DYN}$      | TLP, $t_p=100ns$ , I/O to I/O              |          | 1.2  |     | $\Omega$ |
| ESD Withstand Voltage <sup>1</sup> | $V_{ESD}$      | IEC 61000-4-2 (Contact Discharge)          | $\pm 12$ |      |     | kV       |
|                                    |                | IEC 61000-4-2 (Air Discharge)              | $\pm 18$ |      |     | kV       |
| Diode Capacitance <sup>1</sup>     | $C_{CI/O-I/O}$ | Reverse Bias=0V, $f=1MHz$ , I/O to I/O     |          | 0.09 |     | pF       |


Note: 1 Parameter is guaranteed by design and/or component characterization.

2. Transmission Line Pulse (TLP) with 100ns width, 2ns rise time, and average window  $t_1=70ns$  to  $t_2=90ns$


### Capacitance vs. Reverse Bias

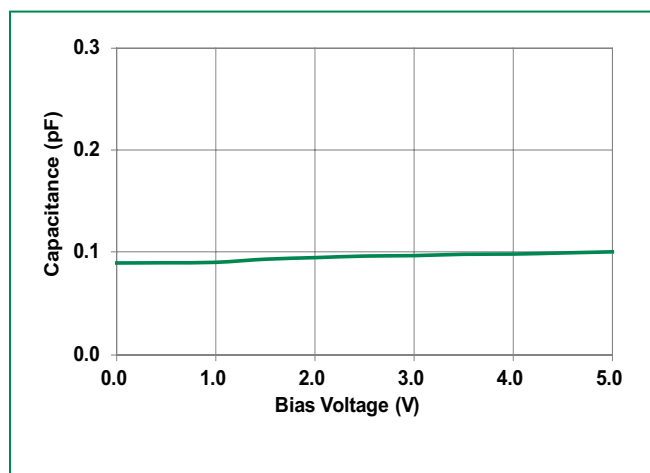


### Clamping Voltage vs. $I_{PP}$

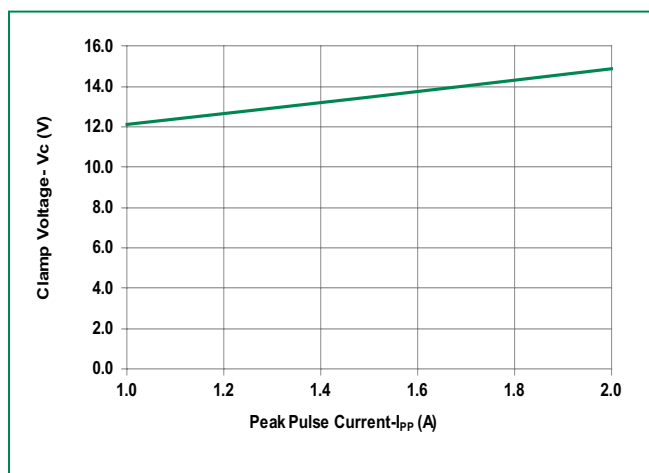


**Positive Transmission Line Pulsing(TLP) Plot**

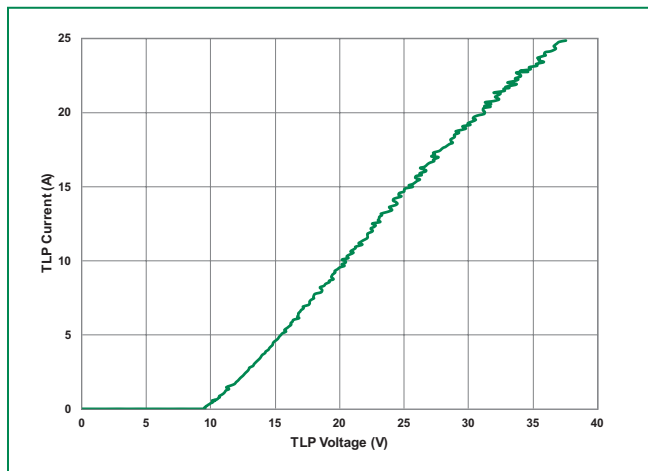


**Negative Transmission Line Pulsing(TLP) Plot**

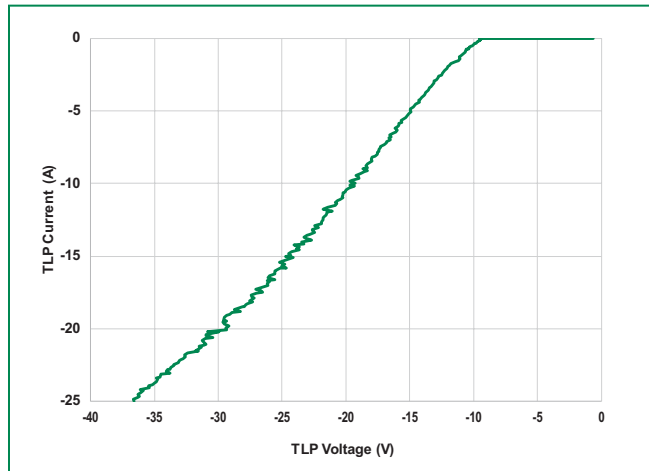


**Insertion Loss (S21) I/O to GND**

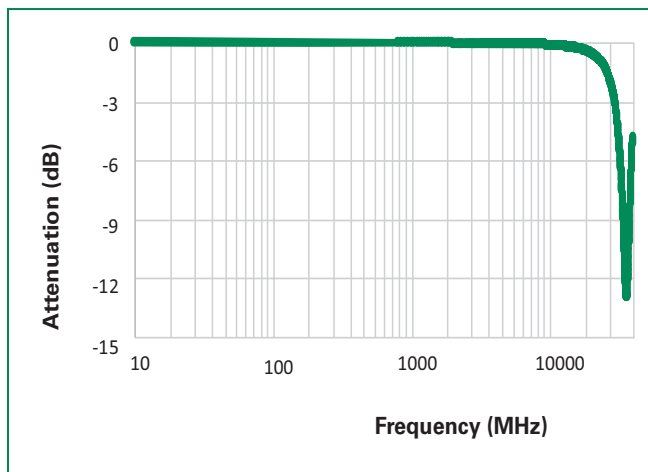


**IEC 61000-4-2 +8kV Contact ESD Clamping Voltage**

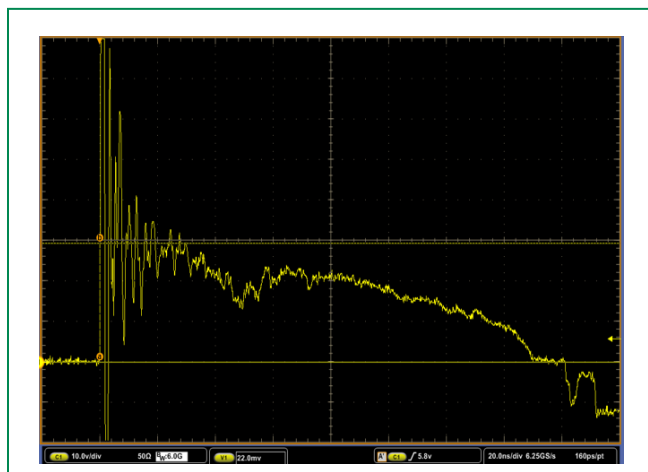


**IEC 61000-4-2 -8kV Contact ESD Clamping Voltage**

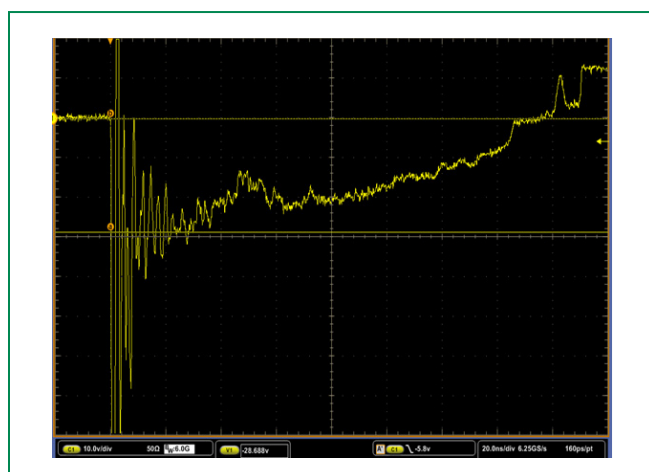


### 3.4 Gbps, High Speed Display interfaces

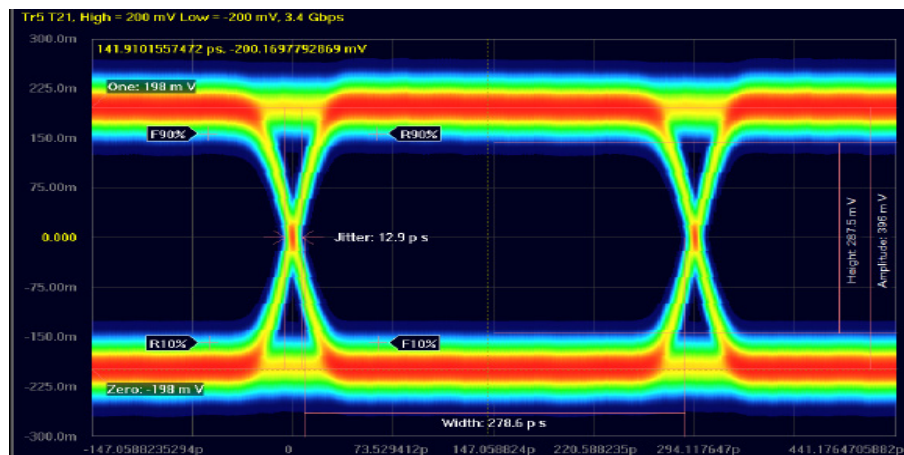

### 6 Gbps, SATA, HDMI 2.x interfaces

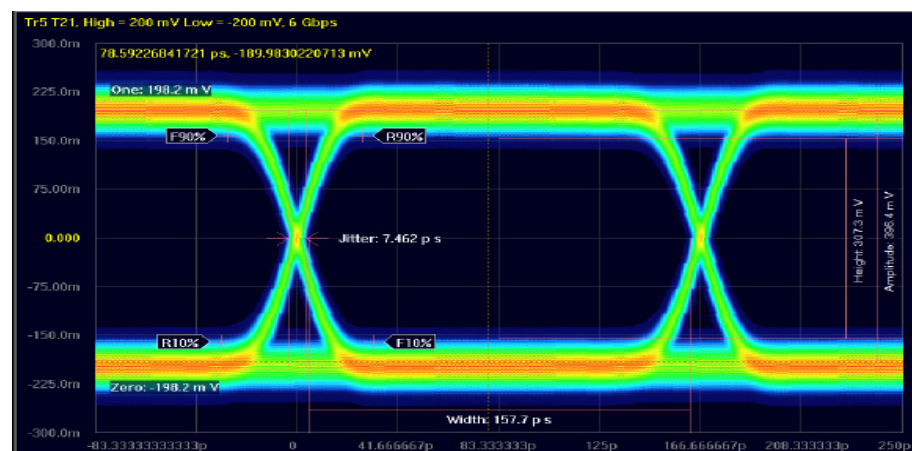


### 10 Gbps, USB 3.1 Gen 2, Thunderbolt

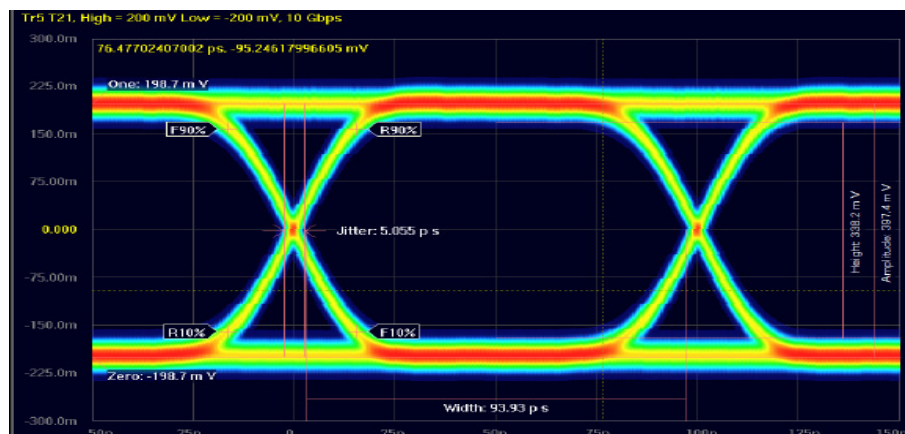


### Soldering Parameters

|                                                        |                                    |                         |
|--------------------------------------------------------|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Pb – Free assembly      |
| Pre Heat                                               | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|                                                        | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|                                                        | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus) Temp ( $T_L$ ) to peak |                                    | 3°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 3°C/second max          |
| Reflow                                                 | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|                                                        | - Temperature ( $t_L$ )            | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 20 – 40 seconds         |
| Ramp-down Rate                                         |                                    | 6°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )                |                                    | 8 minutes Max.          |

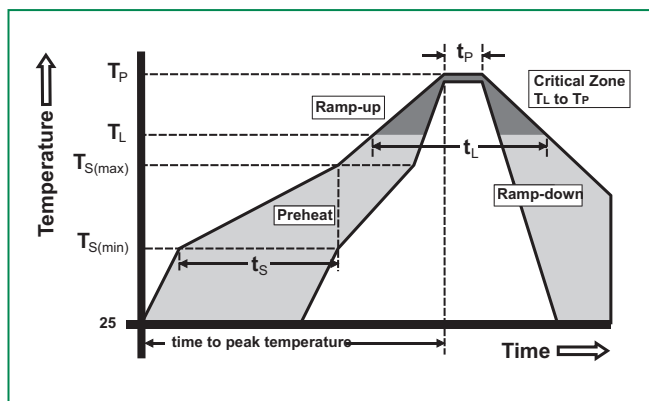


### Part Numbering System

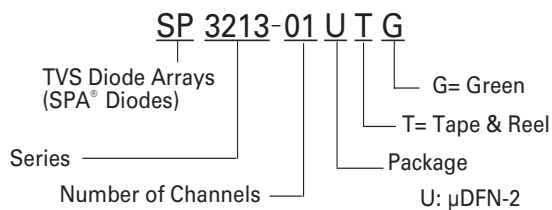

### Product Characteristics

|                           |                                                        |
|---------------------------|--------------------------------------------------------|
| <b>Lead Plating</b>       | Pre-Plated Frame                                       |
| <b>Lead Material</b>      | Copper Alloy                                           |
| <b>Substrate Material</b> | Silicon                                                |
| <b>Body Material</b>      | Molded Compound                                        |
| <b>Flammability</b>       | UL Recognized compound meeting flammability rating V-0 |


### Part Marking System



### Ordering Information


| Part Number  | Package | Min. Order Qty. |
|--------------|---------|-----------------|
| SP3213-01UTG | μDFN-2  | 15000           |

**Package Dimensions —  $\mu$ DFN-2 (0201)**

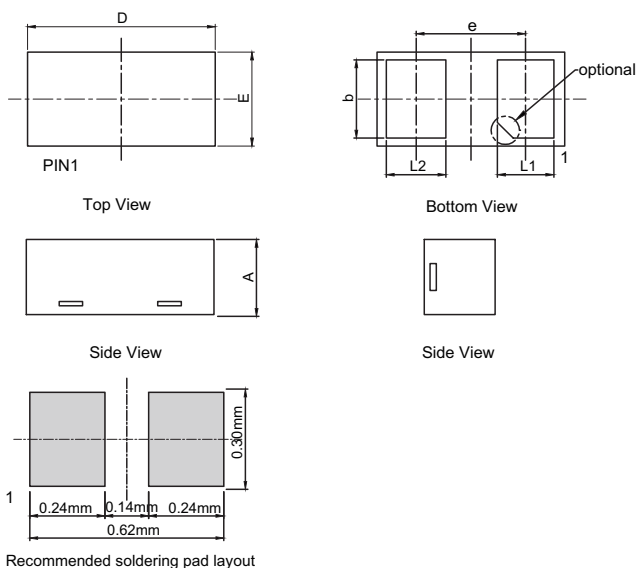

| Package   | $\mu$ DFN-2 (0201) |      |           |       |
|-----------|--------------------|------|-----------|-------|
| JEDEC     | MO-236             |      |           |       |
| Symbol    | Millimeters        |      | Inches    |       |
|           | Min                | Max  | Min       | Max   |
| <b>A</b>  | 0.25               | 0.33 | 0.010     | 0.013 |
| <b>b</b>  | 0.18               | 0.28 | 0.007     | 0.011 |
| <b>L1</b> | 0.12               | 0.22 | 0.005     | 0.009 |
| <b>L2</b> | 0.13               | 0.23 | 0.005     | 0.009 |
| <b>D</b>  | 0.60 BSC           |      | 0.024 BSC |       |
| <b>E</b>  | 0.30 BSC           |      | 0.012 BSC |       |
| <b>e</b>  | 0.35 REF           |      | 0.014 REF |       |

**Embossed Carrier Tape & Reel Specification —  $\mu$ DFN-2**

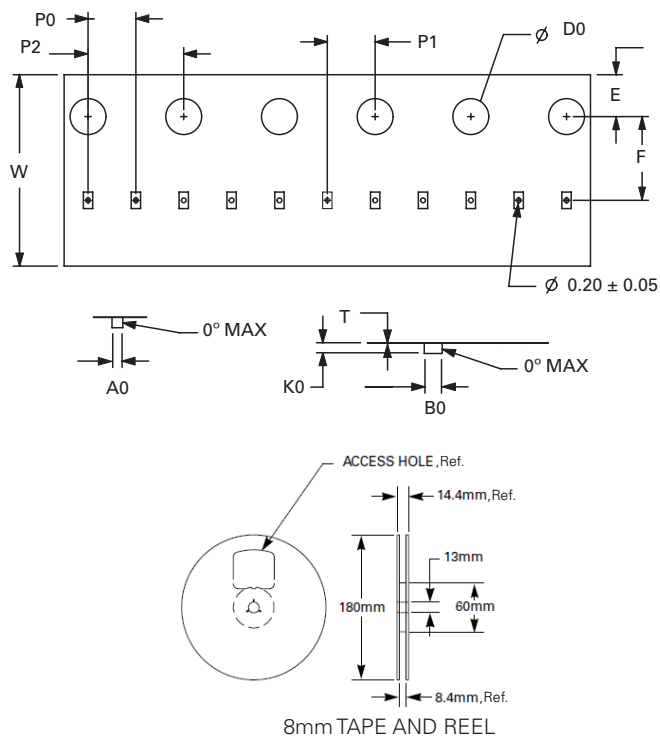

| Symbol    | Millimeters |      | Inches |       |
|-----------|-------------|------|--------|-------|
|           | Min         | Max  | Min    | Max   |
| <b>A0</b> | 0.33        | 0.40 | 0.013  | 0.016 |
| <b>B0</b> | 0.63        | 0.70 | 0.025  | 0.028 |
| <b>D0</b> | 1.40        | 1.60 | 0.055  | 0.063 |
| <b>E</b>  | 1.65        | 1.85 | 0.065  | 0.073 |
| <b>F</b>  | 3.45        | 3.55 | 0.136  | 0.140 |
| <b>K0</b> | 0.30        | 0.39 | 0.012  | 0.015 |
| <b>P0</b> | 1.90        | 2.10 | 0.075  | 0.083 |
| <b>P1</b> | 1.95        | 2.05 | 0.077  | 0.081 |
| <b>P2</b> | 3.90        | 4.10 | 0.154  | 0.161 |
| <b>T</b>  | 0.13        | 0.25 | 0.005  | 0.010 |
| <b>W</b>  | 7.90        | 8.30 | 0.311  | 0.327 |

**Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.