

Alchip™-MVE Series

- Rated voltage range : 6.3 to 450V, capacitance range : 1.0 to 6,800μF
- Endurance : 1,000 to 2,000 hours at 105°C
- Case size range : φ4×5.2L to φ18×21.5L
- Solvent resistant type except 100 to 450V_{dc} (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

MVE → MVL
Longer life MVJ





SPECIFICATIONS

Items	Characteristics											
Category	Temperature Range											
Rated Voltage Range	-40 to +105°C											
Rated Voltage Range	6.3 to 450V _{dc}											
Capacitance Tolerance	±20%(M) (20°C, 120Hz)											
Leakage Current	Rated voltage(V _{dc})	6.3 to 100V						160 to 450V				(20°C)
	D55 to JA0	I=0.01CV or 3μA, whichever is greater (2 minutes)						—				
	KE0 to MN0	I=0.03CV or 4μA, whichever is greater (1 minute)						I=0.04CV+100μA (1minute)				
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)											
Dissipation Factor (tanδ)	See STANDARD RATINGS (20°C, 120Hz)											
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	400 to 450V	(120Hz)
	D55 to JA0	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	3	—	—	
		Z(-40°C)/Z(+20°C)	12	8	6	4	3	3	4	—	—	
	KE0 to MN0	Z(-25°C)/Z(+20°C)	5	4	3	2	2	2	2	3	6	
		Z(-40°C)/Z(+20°C)	10	8	6	4	3	3	3	6	10	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for the specified period of time at 105°C.											
	Size code	D55 to F80					HA0 to MN0					
	Time	1,000 hours					2,000 hours					
	Capacitance change	≤±30% of the initial value					≤±20% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					≤200% of the initial specified value					
	Leakage current	≤The initial specified value					≤The initial specified value					
	Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours (500 hours for B55 to F80 size) at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.										
Size code		D55 to F80					HA0 to MN0					
Capacitance change		≤±25% of the initial value					≤±20% of the initial value					
D.F. (tanδ)		≤200% of the initial specified value					≤200% of the initial specified value					
Leakage current		≤The initial specified value					≤The initial specified value					

DIMENSIONS [mm]

- Terminal Code : A
- Size code : D55 to MN0

- Terminal Code : G
- Size code : LH0 to MN0

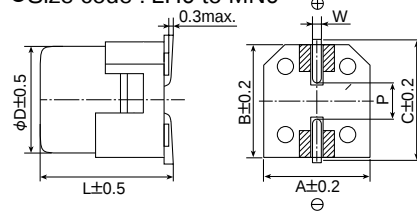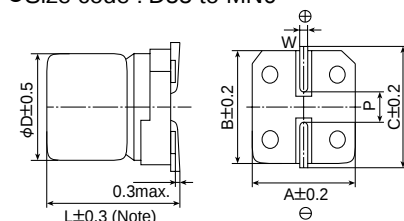


Note : L±0.5 for HA0 to MN0

▨ : Dummy terminals

Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MN0	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5


PART NUMBERING SYSTEM

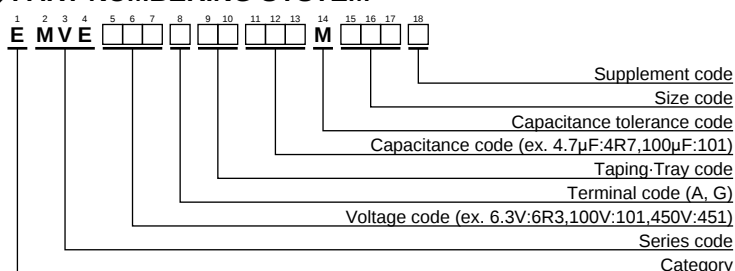


Please refer to "Product code guide (surface mount type)"

MARKING

D55 to JA0
Ex)16V22μF



KE0 to MN0
Ex)25V1,000μF



◆STANDARD RATINGS

□ is not solvent resistant.

WV (Vdc)	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /105°C, 120Hz)	Part No.	WV (Vdc)	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /105°C, 120Hz)	Part No.
6.3	22	D55	0.30	22	EMVE6R3ADA220MD55G	35	330	JA0	0.16	450	EMVE350ADA331MJA0G
	33	E55	0.30	34	EMVE6R3ADA330ME55G		470	KE0	0.22	520	EMVE350ARA471MKE0S
	47	E55	0.30	38	EMVE6R3ADA470ME55G		470	LH0	0.22	650	EMVE350□DA471MLH0S
	100	F55	0.30	69	EMVE6R3ADA101MF55G		1,000	LH0	0.22	750	EMVE350□DA102MLH0S
	220	F80	0.45	120	EMVE6R3ADA221MF80G		1,000	MH0	0.22	1,000	EMVE350□DA102MMH0S
	330	HA0	0.40	290	EMVE6R3ADA331MHA0G		2,200	MN0	0.24	1,450	EMVE350□DA222MMN0S
	470	HA0	0.45	320	EMVE6R3ADA471MHA0G	50	1.0	D55	0.12	8.0	EMVE500ADA1R0MD55G
	680	HA0	0.45	340	EMVE6R3ADA681MHA0G		2.2	D55	0.12	12	EMVE500ADA2R2MD55G
	1,000	JA0	0.40	410	EMVE6R3ADA102MJA0G		3.3	D55	0.12	15	EMVE500ADA3R3MD55G
	1,500	JA0	0.45	550	EMVE6R3ADA152MJA0G		4.7	E55	0.12	20	EMVE500ADA4R7ME55G
	2,200	KE0	0.40	680	EMVE6R3ADA222MKE0S		10	F55	0.12	32	EMVE500ADA100MF55G
	2,200	LH0	0.40	840	EMVE6R3□DA222MLH0S		33	F80	0.14	65	EMVE500ADA330MF80G
	3,300	KG5	0.42	850	EMVE6R3ARA332MKG5S		47	F80	0.14	80	EMVE500ADA470MF80G
	3,300	MH0	0.42	1,000	EMVE6R3□DA332MMH0S		100	HA0	0.14	230	EMVE500ADA101MHA0G
	4,700	LN0	0.44	1,200	EMVE6R3□DA472MLN0S		220	JA0	0.14	375	EMVE500ADA221MJA0G
	4,700	MH0	0.44	1,200	EMVE6R3□DA472MMH0S		330	KE0	0.18	500	EMVE500ARA331MKE0S
	6,800	LN0	0.48	1,200	EMVE6R3□DA682MLN0S		330	LH0	0.18	600	EMVE500□DA331MLH0S
	6,800	MN0	0.48	1,350	EMVE6R3□DA682MMN0S		470	LH0	0.18	700	EMVE500□DA471MLH0S
10	22	E55	0.24	30	EMVE100ADA220ME55G		470	MH0	0.18	750	EMVE500□DA471MMH0S
	33	E55	0.24	34	EMVE100ADA330ME55G		1,000	MN0	0.18	1,200	EMVE500□DA102MMN0S
	47	F55	0.24	48	EMVE100ADA470MF55G	63	1.0	D55	0.12	8.0	EMVE630ADA1R0MD55G
	100	F55	0.30	69	EMVE100ADA101MF55G		2.2	D55	0.12	12	EMVE630ADA2R2MD55G
	150	F80	0.35	100	EMVE100ADA151MF80G		3.3	E55	0.12	17	EMVE630ADA3R3ME55G
	220	F80	0.35	120	EMVE100ADA221MF80G		4.7	F55	0.12	22	EMVE630ADA4R7MF55G
	330	HA0	0.35	290	EMVE100ADA331MHA0G		10	F55	0.12	32	EMVE630ADA100MF55G
	470	HA0	0.35	320	EMVE100ADA471MHA0G		22	F80	0.12	58	EMVE630ADA220MF80G
	1,000	JA0	0.35	410	EMVE100ADA102MJA0G		33	HA0	0.12	140	EMVE630ADA330MHA0G
	2,200	KG5	0.36	750	EMVE100ARA222MKG5S		47	HA0	0.12	170	EMVE630ADA470MHA0G
	2,200	LH0	0.36	850	EMVE100□DA222MLH0S		100	JA0	0.12	310	EMVE630ADA101MJA0G
	3,300	LH0	0.38	1,000	EMVE100□DA332MLH0S		220	KE0	0.14	470	EMVE630ARA221MKE0S
	3,300	MH0	0.38	1,100	EMVE100□DA332MMH0S		220	LH0	0.14	560	EMVE630□DA221MLH0S
	4,700	LN0	0.40	1,300	EMVE100□DA472MLN0S	100	330	LH0	0.14	700	EMVE630□DA331MLH0S
16	4,700	MN0	0.40	1,350	EMVE100□DA472MMN0S		330	MH0	0.14	750	EMVE630□DA331MMH0S
	10	D55	0.20	17	EMVE160ADA100MD55G		470	LN0	0.14	900	EMVE630□DA471MLN0S
	22	E55	0.20	30	EMVE160ADA220ME55G		470	MH0	0.14	900	EMVE630□DA471MMH0S
	33	F55	0.20	45	EMVE160ADA330MF55G	160	22	HA0	0.12	100	EMVE101ADA220MHA0G
	47	F55	0.20	48	EMVE160ADA470MF55G		33	JA0	0.12	150	EMVE101ADA330MJA0G
	100	F55	0.26	69	EMVE160ADA101MF55G		47	KE0	0.10	250	EMVE101ARA470MKE0S
	150	F80	0.28	100	EMVE160ADA151MF80G		68	KE0	0.10	300	EMVE101ARA680MKE0S
	220	F80	0.28	120	EMVE160ADA221MF80G		100	KE0	0.10	380	EMVE101ARA101MKE0S
	330	HA0	0.28	290	EMVE160ADA331MHA0G		100	LH0	0.10	450	EMVE101□DA101MLH0S
	470	HA0	0.28	320	EMVE160ADA471MHA0G		220	LN0	0.10	750	EMVE101□DA221MLN0S
	680	JA0	0.28	470	EMVE160ADA681MJA0G		220	MH0	0.10	750	EMVE101□DA221MMH0S
	1,000	KE0	0.30	550	EMVE160ARA102MKE0S		330	MN0	0.10	980	EMVE101□DA331MMN0S
	1,000	LH0	0.30	650	EMVE160□DA102MLH0S		33	KE0	0.15	95	EMVE161ARA330MKE0S
	2,200	LH0	0.32	950	EMVE160□DA222MLH0S	200	47	LH0	0.15	260	EMVE161□DA470MLH0S
	2,200	MH0	0.32	1,000	EMVE160□DA222MMH0S		68	LN0	0.15	320	EMVE161□DA680MLN0S
25	3,300	LN0	0.34	1,200	EMVE160□DA332MLN0S		68	MH0	0.15	320	EMVE161□DA680MMH0S
	3,300	MH0	0.34	1,200	EMVE160□DA332MMH0S		100	LN0	0.15	380	EMVE161□DA101MLN0S
	10	E55	0.16	27	EMVE250ADA100ME55G		10	KE0	0.15	80	EMVE201ARA100MKE0S
	22	F55	0.16	44	EMVE250ADA220MF55G		22	KG5	0.15	110	EMVE201ARA220MKG5S
	33	F55	0.16	50	EMVE250ADA330MF55G		33	LH0	0.15	220	EMVE201□DA330MLH0S
	47	F55	0.16	60	EMVE250ADA470MF55G		47	LN0	0.15	270	EMVE201□DA470MLN0S
	100	F80	0.18	100	EMVE250ADA101MF80G		47	MH0	0.15	270	EMVE201□DA470MMH0S
	150	HA0	0.18	240	EMVE250ADA151MHA0G		68	MN0	0.15	330	EMVE201□DA680MMN0S
	220	HA0	0.18	320	EMVE250ADA221MHA0G	250	4.7	KE0	0.15	65	EMVE251ARA4R7MKE0S
	330	JA0	0.16	450	EMVE250ADA331MJA0G		10	KG5	0.15	105	EMVE251ARA100MKG5S
	470	JA0	0.18	490	EMVE250ADA471MJA0G		22	LH0	0.15	180	EMVE251□DA220MLH0S
	1,000	LH0	0.26	820	EMVE250□DA102MLH0S		33	LN0	0.15	230	EMVE251□DA330MLN0S
	1,000	MH0	0.26	880	EMVE250□DA102MMH0S		33	MH0	0.15	230	EMVE251□DA330MMH0S
	2,200	LN0	0.28	1,250	EMVE250□DA222MLN0S		47	MN0	0.15	280	EMVE251□DA470MMN0S
	2,200	MN0	0.28	1,300	EMVE250□DA222MMN0S		4.7	KG5	0.20	50	EMVE401ARA4R7MKG5S
	4.7	D55	0.14	16	EMVE350ADA4R7MD55G		10	LH0	0.20	85	EMVE401□DA100MLH0S
	10	E55	0.14	27	EMVE350ADA100ME55G		22	MN0	0.20	130	EMVE401□DA220MMN0S
	22	F55	0.14	44	EMVE350ADA220MF55G	450	3.3	KE0	0.20	40	EMVE451ARA3R3MKE0S
	47	F80	0.16	80	EMVE350ADA470MF80G		4.7	KG5	0.20	50	EMVE451ARA4R7MKG5S
	100	F80	0.16	100	EMVE350ADA101MF80G		10	LH0	0.20	85	EMVE451□DA100MLH0S
	150	HA0	0.16	260	EMVE350ADA151MHA0G		22	MN0	0.20	130	EMVE451□DA220MMN0S
35	220	JA0	0.16	375	EMVE350ADA221MJA0G						

□ : Enter the appropriate terminal code.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

United Chemi-Con (UCC):

[MVE50VC10RMF55TP](#) [MVE16VC22RME55TP](#) [MVE100VC22RMH10TP](#) [MVE100VC68RMK14TP](#)
[MVE25VC221MH10TP](#) [MVE35VC221MJ10TP](#) [MVE50VC101MH10TP](#) [MVE50VC221MJ10TP](#) [MVE63VC101MJ10TP](#)
[MVE63VC10RMF55TP](#) [EMVE101ARA680MKE0S](#) [EMVE101ADA330MJA0G](#) [EMVE101ADA101MKE0S](#)
[EMVE201ARA220MKG5S](#) [EMVE350ARA471MKE0S](#) [EMVE500ADA470MF80G](#) [EMVE630ARA221MKE0S](#)
[EMVE100ADA102MJA0G](#) [EMVE101ADA220MHA0G](#) [EMVE101ARA680KEOS](#) [EMVE101ARA680MKD5G](#)
[EMVE160ADA220ME55G](#) [EMVE250ADA221MHA0G](#) [EMVE250ADA331MJA0G](#) [EMVE250ADA471MJA0G](#)
[EMVE350ADA101MF80G](#) [EMVE350ADA221MJA0G](#) [EMVE350ADA470MF80G](#) [EMVE500ADA100MF55G](#)
[EMVE500ADA1R0MD55G](#) [EMVE630ADA100MF55G](#) [EMVE630ADA101MJA0G](#) [EMVE500ADA101MHA0G](#)
[EMVE160ADA471MHA0G](#) [EMVE101GDA221MLN0S](#) [EMVE630ADA4R7MF55G](#) [EMVE630ADA470MHA0G](#)
[EMVE630ADA3R3ME55G](#) [EMVE6R3GDA472MLN0S](#) [EMVE630ADA330MHA0G](#) [EMVE630ADA2R2MD55G](#)
[EMVE630ADA220MF80G](#) [EMVE630ADA1R0MD55G](#) [EMVE6R3ADA101MF55G](#) [EMVE160ADA101MF55G](#)
[EMVE630GDA221MLH0S](#) [EMVE101GDA331MMN0S](#) [EMVE6R3GDA682MLN0S](#) [EMVE6R3GDA682MMN0S](#)
[EMVE6R3GDA472MMH0S](#) [EMVE101GDA101MLH0S](#) [EMVE101GDA221MMH0S](#) [EMVE101ARA470MKE0S](#)
[EMVE101ARA101MKE0S](#) [EMVE100GDA472MMN0S](#) [EMVE6R3ADA470ME55G](#) [EMVE6R3ADA221MF80G](#)
[EMVE350ADA220MF55G](#) [EMVE630GDA471MLN0S](#) [EMVE6R3GDA332MMH0S](#) [EMVE6R3GDA222MLH0S](#)
[EMVE6R3ARA332MKG5S](#) [EMVE6R3ARA222MKE0S](#) [EMVE630ADAR47MD55G](#) [EMVE6R3ADA471MHA0G](#)
[EMVE6R3ADA331MHA0G](#) [EMVE6R3ADA330ME55G](#) [EMVE6R3ADA220MD55G](#) [EMVE6R3ADA102MJA0G](#)
[EMVE6R3ADA152MJA0G](#) [EMVE630GDA471MMH0S](#) [EMVE630GDA331MMH0S](#) [EMVE630GDA331MLH0S](#)
[EMVE6R3ADA681MHA0G](#) [EMVE160ADA470MF55G](#) [EMVE101ADA470MJA0G](#) [EMVE250ADA330MF55G](#)
[EMVE250ADA220MF55G](#) [EMVE250ADA151MHA0G](#) [EMVE160ADA100MD55G](#) [EMVE250ADA100ME55G](#)
[EMVE160ADA681MJA0G](#) [EMVE160ADA221MF80G](#) [EMVE250ADA470MF55G](#) [EMVE160ADA331MHA0G](#)
[EMVE250ADA101MF80G](#) [EMVE160ARA102MKE0S](#) [EMVE160ARA152MKE0S](#) [EMVE160GDA102MLH0S](#)
[EMVE160GDA222MLH0S](#) [EMVE160GDA222MMH0S](#) [EMVE160GDA332MLN0S](#) [EMVE160GDA332MMH0S](#)
[EMVE160ADA330MF55G](#) [EMVE100ADA221MF80G](#) [EMVE350GDA102MLH0S](#) [EMVE160ADA151MF80G](#)
[EMVE100GDA472MLN0S](#) [EMVE100GDA332MMH0S](#) [EMVE100GDA332MLH0S](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.