

MEMS Flow Sensors **D6F series**

Series Catalog

Faster and more accurate than ever before

MEMS flow sensor : the ideal means for mass flow measurement

Omron flow sensor
so precise
even the flap of a butterfly's
wings will not be missed.



Realizing a highly accurate flow measurement,


Omron's MEMS flow sensor accurately detects minute airflow so much as a single flap of a butterfly's wings. A gas flow sensor capable of "measuring mass flow" independent of temperature and pressure.



D6F-A6



D6F-W

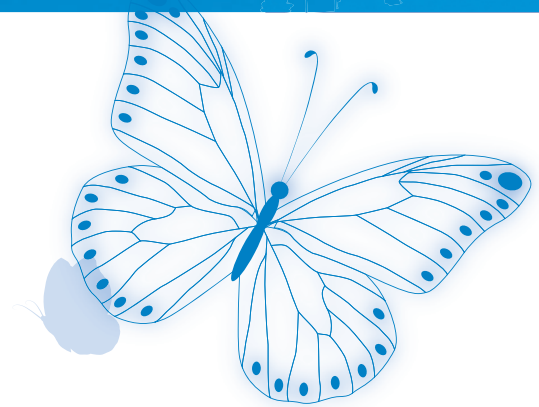

Mass Flow Measurement

Q1 There are two balloons; each having different volumes. But these balloons have the same mass. Why is that?

A The volume increases/decreases according to the pressure and temperature changes. The mass, on the other hand, remains constant regardless of the environmental changes. The mass flow measurement allows measurement performance that is not affected by the changes in the environment.

Q2 Why is mass flow measurement required?

A An accurate measurement of the flow is required especially for combustion control. Omron's flow sensor enables measuring the gas flow based on the mass flow measurement.

Principles of MEMS Flow D6F Series



During the absence of airflow, the temperature distribution around the heater is symmetrical. When there is airflow, the temperature of the upwind side cools down and the temperature of the downwind side warms up, disrupting the symmetry of the temperature distribution.

sensing even a single flap of a butterfly's wings



High Accuracy

$\pm 3RD$ (25-100%F.S.) is realized by linear temperature correction using ASIC technology

Ambient temperature = 25degC (Model: D6F-20A7D-000-0)

Operating characteristic



High Sensitivity

Omron's unique MEMS technology allows detection of very low air velocities


Flow rate of 1L: Output corresponding to flow rate change below 1/1000 of full scale. 1SLM = 1000sccm




Compact

The product size is reduced by using the world-smallest class size MEMS sensor element

Dimension of D6F-V model: 24x8x14mm.



Sensor Measurement

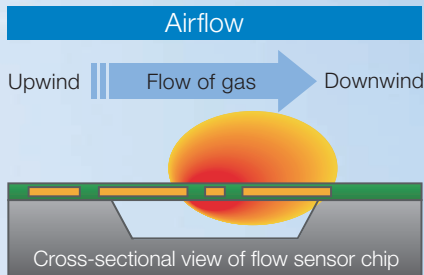

By detecting this temperature difference appearing as a difference in the electromotive forces developed by the thermopiles, it allows the mass flow rate and mass flow velocity to be measured without the influence of temperature and pressure. Since the thermopile generates the thermo-electromotive force, the power consumption is much lower than when using the resistivity method.

Highly Resistant to Dust

Patent No.4534526

Built-in Dust Segregation System (cyclonic) D6F-W/-V/-P

The sensor can be placed anywhere thanks to its dust-resistant structure. Omron's unique design of 3D flow path provides a high level of reliability by separating dust particles to reduce its effect on the sensor chip. Additionally, Omron succeeded in reducing the sensor size, allowing it to be used in wider range of applications.



Applications

Omron flow sensors cover wide range of applications and can be used for different purposes.

Application Examples

Clogging Detection

For monitoring the flow of the cooling air to optimize the cooling efficiency and avoid malfunctions.

- ▶ Flow rate
- ▶ Velocity
- ▶ Differential pressure



Projector



PC



Server

Quiet, low maintenance cost


Combustion Control

For controlling the air/fuel ratio by accurately measuring the mass flow rate

- ▶ Flow rate
- ▶ Differential pressure



Fuel cell

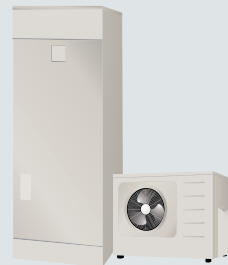

Water heater



Boiler

Optimizing combustion efficiency

Flow measurement

For recording the amount of air used, detecting even the smallest leaks

- ▶ Flow rate
- ▶ Differential pressure



Container manufacturing machine



Mounting machine

Flow visualization, real-time detection

Air volume measurement

For measuring flow rate and flow velocity of a space

- ▶ Velocity
- ▶ Differential pressure



Ducts



Airflow analysis (environment)



Air conditioner

Monitoring the amount of ventilation, controlling the amount of air at the required level


Selection of Products

Select the most suitable sensor from many variations.

► Flow rate



► Flow velocity

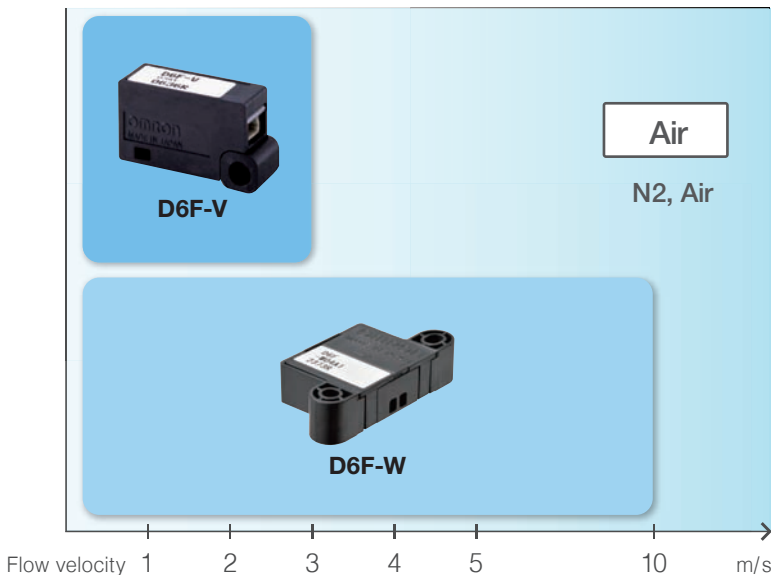

► Differential pressure

Delivers high sensitivity even at low flow rate, low differential pressure

MEMS differential pressure sensor

High precision
Accurate measurement

Low piping effects

High impedance to reduce the influence of piping variations

High reliability





Detect sensor anomaly






List of D6F series

MEMS Flow Sensor










Air
 Minute flow
 Analog

| Applicable gas | | Air | | | |
|-------------------------|-------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Items | Model | D6F-P0001A1 | D6F-01A1-110 D6F-P0010A□ D6F-P0010AM2 | D6F-02A1-110 | D6F-03A3-000 |
| Shape | |  |  |  |  |
| Flow rate range (L/min) | 5 | | | | 0~3L/min |
| | 4 | | | | |
| | 3 | | | | |
| | 2 | | | 0~2L/min | |
| | 1 | 0~0.1L/min | 0~1L/min | | |
| | 0 | | | | |
| Page | | 25 | 8, 25 | 8 | 12 |

Gas
 Minute to middle flow
 Analog







| Applicable gas | | Natural gas (13A) | LP gas | Natural gas (13A) |
|-------------------------|-------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Items | Model | D6F-01N2-000 | D6F-02L2-000 D6F-02L7-000 | D6F-05N2-000 D6F-05N7-000 |
| Shape | |  |  |  |
| Flow rate range (L/min) | 5 | | | 0~5L/min |
| | 4 | | | |
| | 3 | | | |
| | 2 | | 0~2L/min | |
| | 1 | 0~1L/min | | |
| | 0 | | | |
| Page | | 10 | 10, 18 | 10, 16, 18 |

Air
 Middle to high flow
 Analog
 Digital
 Digital type only

| Applicable gas | | Air | | | | |
|-------------------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Items | Model | D6F-10A5-000 D6F-10A6-000 D6F-10A7-000 D6F-10A7D-000  | D6F-20A5-000 D6F-20A6-000 D6F-20A7D-000  | D6F-30A7-000 D6F-30AB71-000 | D6F-50A5-000 D6F-50A6-000 D6F-50A7D-000  | D6F-70AB71-000 D6F-70AB71D-000  |
| Shape | |  |  |  |  |  |
| Flow rate range (L/min) | 70 | | | | 0~50L/min | 0~70L/min |
| | 60 | | | | | |
| | 50 | | | | | |
| | 40 | | | 0~30L/min | | |
| | 30 | 0~10L/min | 0~20L/min | | | |
| | 0 | | | | | |
| Page | | 14, 16, 18, 20 | 14, 16, 20 | 18, 23 | 14, 16, 20 | 20, 23 |







MEMS 2-axis flow sensor/ MEMS flow sensor

Air
 Flow velocity
 Analog
 Digital
 Digital type only

| Applicable gas | | Air | | | | |
|---------------------------|-------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Items | Model | D6F-D  | D6F-W01A1 | D6F-V03A1 | D6F-W04A1 | D6F-W10A1 |
| Shape | |  |  |  |  |  |
| Flow velocity range (m/s) | 10 | | | | | 0~10m/s |
| | 8 | | | | | |
| | 6 | | | | | |
| | 4 | | | 0~3m/s | 0~4m/s | |
| | 2 | -1~1m/s | 0~1m/s | | | |
| | 0 | | | | | |
| | -2 | | | | | |
| Page | | 35 | 31 | 33 | 31 | 31 |

MEMS differential pressure sensor

Air
 Differential pressure
 Digital
 Digital type only

| Applicable gas | | Air | | |
|----------------------------------|-------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| Items | Model | D6F-PH0505AD3  | D6F-PH0025AD1  | D6F-PH5050AD3  |
| Shape | |  |  |  |
| Differential pressure range (Pa) | 500 | | | -500~500Pa |
| | 250 | | | |
| | 50 | | 0~250Pa | |
| | 0 | -50~50Pa | | |
| | -50 | | | |
| | -250 | | | |
| | -500 | | | |
| Page | | | 28 | |

D6F-A1

MEMS Flow Sensor

A Compact, High-accuracy Sensor That Measures Low Flow Rates.

Air Analog

- High accuracy of $\pm 3\%$ FS.
- Flow rates can be measured without being affected by temperature or pressure.



RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 40.

Ordering Information

MEMS Flow Sensor

| Applicable fluid | Flow rate range | Model |
|------------------|-----------------|--------------|
| Air | 0 to 1 L/min | D6F-01A1-110 |
| | 0 to 2 L/min | D6F-02A1-110 |

Accessory (included)

| Type | Model |
|-------|------------|
| Cable | D6F-CABLE1 |

Connections

D6F-01A1-110 D6F-02A1-110

| | |
|-----------|----------------------------------|
| Pin No. | 1: Vcc 2: Vout 3: GND |
| Connector | 53398-03** (Made by Molex Japan) |


Use the following connectors for connections to the D6F:
Housing 51021-0300 (Made by Molex Japan)
Terminals 50079 (Made by Molex Japan)
Wires AWG28 to AWG26

Tubes Install tubes made of materials such as rubber or urethane so that they will not come out.
For urethane tubes, tubes with an outer diameter of 12 mm and an inner diameter of 8 mm are recommended.




Output Voltage Characteristics

D6F-01A1-110



D6F-02A1-110

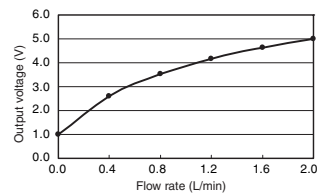

D6F-01A1-110

| Flow rate L/min (normal) | 0 | 0.2 | 0.4 | 0.6 | 0.8 | 1.0 |
|--------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Output voltage V | 1.00 ± 0.12 | 2.31 ± 0.12 | 3.21 ± 0.12 | 3.93 ± 0.12 | 4.51 ± 0.12 | 5.00 ± 0.12 |

D6F-02A1-110

| Flow rate L/min (normal) | 0 | 0.4 | 0.8 | 1.2 | 1.6 | 2.0 |
|--------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Output voltage V | 1.00 ± 0.12 | 2.59 ± 0.12 | 3.53 ± 0.12 | 4.18 ± 0.12 | 4.65 ± 0.12 | 5.00 ± 0.12 |

Measurement conditions: Power supply voltage of 12 ± 0.1 VDC, ambient temperature of 25 ± 5 °C, and ambient humidity of 35% to 75%.

Characteristics/Performance

| Model | D6F-01A1-110 | D6F-02A1-110 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|---------------|
| Flow Range (See note 1.) | 0 to 1 L/min | 0 to 2 L/min. |
| Calibration Gas (See note 2.) | Air | |
| Flow Port Type | Bamboo joint Maximum outside diameter: 8.6 mm, Minimum outside diameter: 7.4 mm | |
| Electrical Connection | Three-pin connector | |
| Power Supply | 10.8 to 26.4 VDC | |
| Current Consumption | 15 mA max with no load, with a Vcc of 12 to 24 VDC, and at 25°C | |
| Output Voltage | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ) | |
| Accuracy | ±3% FS (25°C characteristic) | |
| Repeatability (See note 3.) | ±0.3% FS | |
| Output Voltage (Max.) | 5.7 VDC (Load resistance: 10 kΩ) | |
| Output Voltage (Min.) | 0 VDC (Load resistance: 10 kΩ) | |
| Rated Power Supply Voltage | 26.4 VDC | |
| Rated Output Voltage | 6 VDC | |
| Case | PPS | |
| Degree of Protection | IEC IP40 (Excluding tubing sections.) | |
| Withstand Pressure | 200 kPa | |
| Pressure Drop (See note 3.) | 0.42 kPa | 1.06 kPa |
| Operating Temperature (See note 4.) | -10 to 60°C | |
| Operating Humidity (See note 4.) | 35% to 85% | |
| Storage Temperature (See note 4.) | -40 to 80°C | |
| Storage Humidity (See note 4.) | 35% to 85% | |
| Temperature Characteristics | ±3% FS for 25°C characteristic at an ambient temperature of -10 to 60°C | |
| Insulation Resistance | Between Sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC) | |
| Dielectric Strength | Between Sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) | |
| Weight | 12.8 g | |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)


Note: 4. With no condensation or icing.

Dimensions (Unit: mm)

D6F-01A1-110 D6F-02A1-110



Mounting Hole Dimensions

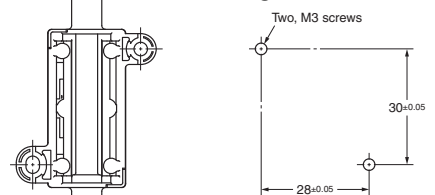

Cable (included): D6F-CABLE1



D6F-N2/-L2

MEMS Flow Sensor

A Compact, High-accuracy Sensor That Measures Low Flow Rates.

Gas Analog

- High accuracy of $\pm 3\%$ FS.
- Flow rates can be measured without being affected by temperature or pressure.



RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 40. on page 40.

Ordering Information

MEMS Flow Sensor

| Applicable fluid | Flow rate range | Model |
|-------------------|-----------------|--------------|
| Natural gas (13A) | 0 to 1 L/min | D6F-01N2-000 |
| | 0 to 5 L/min | D6F-05N2-000 |
| LP gas | 0 to 2 L/min | D6F-02L2-000 |

Accessory (included)


| Type | Model |
|-------|------------|
| Cable | D6F-CABLE1 |

Connections

D6F-01N2-000
D6F-05N2-000
D6F-02L2-000


Pin No. 1: Vcc
2: Vout
3: GND
Connector 53398-03** (Made by Molex Japan)

Use the following connectors for connections to the D6F:
Housing 51021-0300 (Made by Molex Japan)
Terminals 50079 (Made by Molex Japan)
Wires AWG28 to AWG26

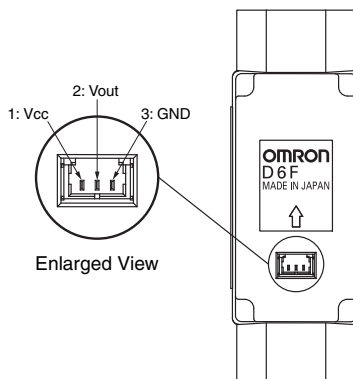


Output Voltage Characteristics


D6F-01N2-000

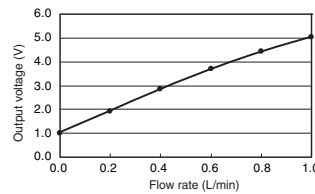

D6F-05N2-000

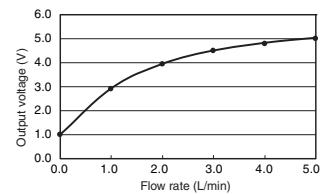

D6F-02L2-000

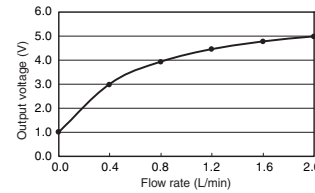

D6F-01N2-000

| Flow rate L/min (normal) | 0 | 0.2 | 0.4 | 0.6 | 0.8 | 1.0 |
|--------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Output voltage V | 1.00 ± 0.12 | 1.90 ± 0.12 | 2.81 ± 0.12 | 3.64 ± 0.12 | 4.37 ± 0.12 | 5.00 ± 0.12 |

D6F-05N2-000

| Flow rate L/min (normal) | 0 | 1.0 | 2.0 | 3.0 | 4.0 | 5.0 |
|--------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Output voltage V | 1.00 ± 0.12 | 2.91 ± 0.12 | 3.92 ± 0.12 | 4.47 ± 0.12 | 4.79 ± 0.12 | 5.00 ± 0.12 |

D6F-02L2-000

| Flow rate L/min (normal) | 0 | 0.4 | 0.8 | 1.2 | 1.6 | 2.0 |
|--------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| Output voltage V | 1.00 ± 0.30 | 3.02 ± 0.08 | 3.95 ± 0.08 | 4.47 ± 0.08 | 4.79 ± 0.08 | 5.00 ± 0.12 |

Measurement conditions: Power supply voltage of 12 ± 0.1 VDC, ambient temperature of $25 \pm 5^\circ\text{C}$, and ambient humidity of 35% to 75%.

Characteristics/Performance

| Model | D6F-01N2-000 | D6F-05N2-000 | D6F-02L2-000 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------------------------------------|---------------|
| Flow Range (See note 1.) | 0 to 1 L/min | 0 to 5 L/min | 0 to 2 L/min. |
| Calibration Gas (See note 2.) | Natural gas (13A) | | Propane gas |
| Flow Port Type | Rc 1/4 thread | | |
| Electrical Connection | Three-pin connector | | |
| Power Supply | 10.8 to 26.4 VDC | | |
| Current Consumption | 15 mA max. with no load, with a Vcc of 12 to 24 VDC, and at 25°C | | |
| Output Voltage | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ) | | |
| Accuracy | ±3% FS (25°C characteristic) | ±2% to ±7.5% F.S. (25°C characteristic) | |
| Repeatability (See note 3.) | ±0.2% FS | ±0.3% FS | |
| Output Voltage (Max.) | 5.7 VDC (Load resistance: 10 kΩ) | | |
| Output Voltage (Min.) | 0 VDC (Load resistance: 10 kΩ) | | |
| Rated Power Supply Voltage | 26.4 VDC | | |
| Rated Output Voltage | 6 VDC | | |
| Case | Aluminum alloy | | |
| Degree of Protection | IEC IP40 (Excluding tubing sections.) | | |
| Withstand Pressure | 200 kPa | | |
| Pressure Drop (See note 3.) | 0.017 kPa | 0.10 kPa | 0.14 kPa |
| Operating Temperature (See note 4.) | -10 to 60°C | | |
| Operating Humidity (See note 4.) | 35% to 85% | | |
| Storage Temperature (See note 4.) | -40 to 80°C | | |
| Storage Humidity (See note 4.) | 35% to 85% | | |
| Temperature Characteristics | ±3% FS for 25°C characteristic at -10 to 60°C | ±4% FS for 25°C characteristic at -10 to 60°C | |
| Insulation Resistance | Between Sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC) | | |
| Dielectric Strength | Between Sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) | | |
| Weight | 35.3 g | | |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.

Dimensions (Unit: mm)


D6F-01N2-000

D6F-05N2-000


D6F-02L2-000



Mounting Hole Dimensions



Cable (included): D6F-CABLE1

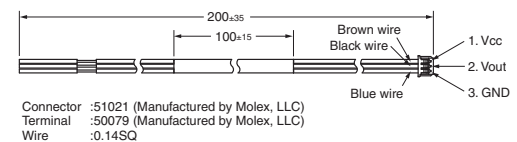

D6F-A3

MEMS Flow Sensor

High-accuracy Sensing with a Thin, Compact Body.

Air Analog

- A thin, lightweight flow sensor.
- Unique flow path structure provides high precision and fast response.



RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 40.

Ordering Information

MEMS Flow Sensor

| Applicable fluid | Flow rate range | Model |
|------------------|-----------------|---------------------|
| Air | 0 to 3 L/min | D6F-03A3-000 |

Accessory (Sold separately)

| Type | Model |
|-------|---------------------|
| Cable | D6F-CABLE2 |
| | D6F-CABLE2-L |

Note: Refer to *Accessories for the D6F Series* on page 39.

Connections

D6F-03A3-000



Pin No. 1: GND
 2: Vout
 3: Vcc

Connector SM03B-SRSS-TB (Made by J.S.T. Mfg. Co.)

Use the following connectors made by J.S.T. Mfg. Co. for connections to the Sensor:

- Pressure-welded Connector

Socket: 03SR-3S

Wires: AWG30

Or

- Crimp Connector


Contacts: SSH-003T-P0.2

Housing: SHR-03V-S or SHR-03V-S-B

Wires: AWG32 to AWG28

Output Voltage Characteristics

D6F-03A3-000

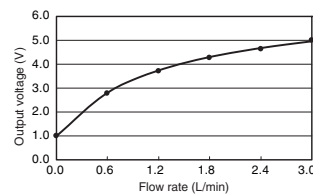

D6F-03A3-000

| Flow rate L/min (normal) | 0 | 0.6 | 1.2 | 1.8 | 2.4 | 3.0 |
|--------------------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Output voltage V | 1.00 ±0.2 | 2.83 ±0.2 | 3.77 ±0.2 | 4.34 ±0.2 | 4.72 ±0.2 | 5.00 ±0.2 |

Measurement conditions: Power supply voltage of 12 ± 0.1 VDC, ambient temperature of $25 \pm 5^\circ\text{C}$, and ambient humidity of 35% to 75%.

Characteristics/Performance

| | |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Model | D6F-03A3-000 |
| Flow Range (See note 1.) | 0 to 3 L/min |
| Calibration Gas (See note 2.) | Air |
| Flow Port Type | M5 thread |
| Electrical Connection | Three-pin connector |
| Power Supply | 10.8 to 26.4 VDC |
| Current Consumption | 15 mA max. with no load, with a Vcc of 12 to 24 VDC, and at 25°C |
| Output Voltage | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ) |
| Accuracy | ±5% FS (25°C characteristic) |
| Repeatability (See note 3.) | ±0.7% FS |
| Output Voltage (Max.) | 5.7 VDC (Load resistance: 10 kΩ) |
| Output Voltage (Min.) | 0 VDC (Load resistance: 10 kΩ) |
| Rated Power Supply Voltage | 26.4 VDC |
| Rated Output Voltage | 6 VDC |
| Case | PPS |
| Degree of Protection | IEC IP40 (Excluding tubing sections.) |
| Withstand Pressure | 200 kPa |
| Pressure Drop (See note 3.) | 0.45 kPa |
| Operating Temperature (See note 4.) | 0 to 50°C |
| Operating Humidity (See note 4.) | 35% to 85% |
| Storage Temperature (See note 4.) | -10 to 60°C |
| Storage Humidity (See note 4.) | 35% to 85% |
| Temperature Characteristics | ±5% FS for 25°C characteristic at an ambient temperature of 0 to 50°C |
| Insulation Resistance | Between Sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC) |
| Dielectric Strength | Between Sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |
| Weight | 5.3 g |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.

Dimensions (Unit: mm)

● MEMS Flow Sensors

D6F-03A3-000



D6F-A5

MEMS Flow Sensor

High-accuracy Sensing with a Compact Body for Flow Rates Up to 50 L/min.

Air Analog

- Accurately detects a mass flow rate of 10 to 50 L/min.
- A compact size of 30 × 78 × 30 mm (H × W × D).



RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 40.

Ordering Information

MEMS Flow Sensor

| Flow Port Type | Applicable fluid | Flow rate range | Model |
|----------------|------------------|-----------------|--------------|
| Manifold | Air | 0 to 10 L/min | D6F-10A5-000 |
| | | 0 to 20 L/min | D6F-20A5-000 |
| | | 0 to 50 L/min | D6F-50A5-000 |

Accessory (Sold separately)

| Type | Model |
|-------|------------|
| Cable | D6F-CABLE1 |

Note: Refer to *Accessories for the D6F Series* on page 39.

Connections

D6F-10A5-000
D6F-20A5-000
D6F-50A5-000

Pin No. 1: Vcc
2: Vout
3: GND
Connector 53398-03** (Made by Molex Japan)

Use the following connectors for connections to the D6F:
Housing 51021-0300 (Made by Molex Japan)
Terminals 50079 (Made by Molex Japan)
Wires AWG28 to AWG26

1: Vcc 2: Vout 3: GND



Enlarged View




Output Voltage Characteristics

D6F-10A5-000



D6F-20A5-000

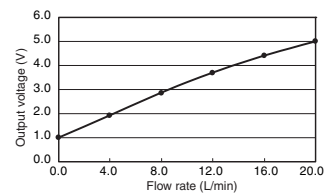

D6F-50A5-000



D6F-10A5-000

| Flow rate L/min (normal) | 0 | 2.0 | 4.0 | 6.0 | 8.0 | 10.0 |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V | 1.00 ±0.12 | 1.75 ±0.12 | 2.60 ±0.12 | 3.45 ±0.12 | 4.25 ±0.12 | 5.00 ±0.12 |

D6F-20A5-000

| Flow rate L/min (normal) | 0 | 4.0 | 8.0 | 12.0 | 16.0 | 20.0 |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V | 1.00 ±0.12 | 1.93 ±0.12 | 2.87 ±0.12 | 3.70 ±0.12 | 4.41 ±0.12 | 5.00 ±0.12 |

D6F-50A5-000

| Flow rate L/min (normal) | 0 | 10 | 20 | 30 | 40 | 50 |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V | 1.00 ±0.12 | 2.45 ±0.12 | 3.51 ±0.12 | 4.20 ±0.12 | 4.66 ±0.12 | 5.00 ±0.12 |

Measurement conditions: Power supply voltage of 12±0.1 VDC, ambient temperature of 25±5°C, and ambient humidity of 35% to 75%.

Characteristics/Performance

| Model | D6F-10A5-000 | D6F-20A5-000 | D6F-50A5-000 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|---------------|---------------|
| Flow Range (See note 1.) | 0 to 10 L/min | 0 to 20 L/min | 0 to 50 L/min |
| Calibration Gas (See note 2.) | Air | | |
| Flow Port Type | Manifold | | |
| Electrical Connection | Three-pin connector | | |
| Power Supply | 10.8 to 26.4 VDC | | |
| Current Consumption | 15 mA max. with no load, with a Vcc of 12 to 24 VDC, and at 25°C | | |
| Output Voltage | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ) | | |
| Accuracy | ±3% FS (25°C characteristic) | | |
| Repeatability (See note 3.) | ±0.3% FS | | |
| Output Voltage (Max.) | 5.7 VDC (Load resistance: 10 kΩ) | | |
| Output Voltage (Min.) | 0 VDC (Load resistance: 10 kΩ) | | |
| Rated Power Supply Voltage | 26.4 VDC | | |
| Rated Output Voltage | 6 VDC | | |
| Case | PPS/aluminum alloy | | |
| Degree of Protection | IEC IP40 (Excluding tubing sections.) | | |
| Withstand Pressure | 500 kPa | | |
| Pressure Drop (See note 3.) | 0.8 kPa | 2.9 kPa | 17.2 kPa |
| Operating Temperature (See note 4.) | -10 to 60°C | | |
| Operating Humidity (See note 4.) | 35% to 85% | | |
| Storage Temperature (See note 4.) | -30 to 80°C | | |
| Storage Humidity (See note 4.) | 35% to 85% | | |
| Temperature Characteristics | ±3% FS for 25°C characteristic at an ambient temperature of -10 to 60°C | | |
| Insulation Resistance | Between Sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC) | | |
| Dielectric Strength | Between Sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) | | |
| Weight | 103 g | | |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.

Dimensions (Unit: mm)


MEMS Flow Sensors

D6F-10A5-000

D6F-20A5-000

D6F-50A5-000

Mounting Hole Dimensions

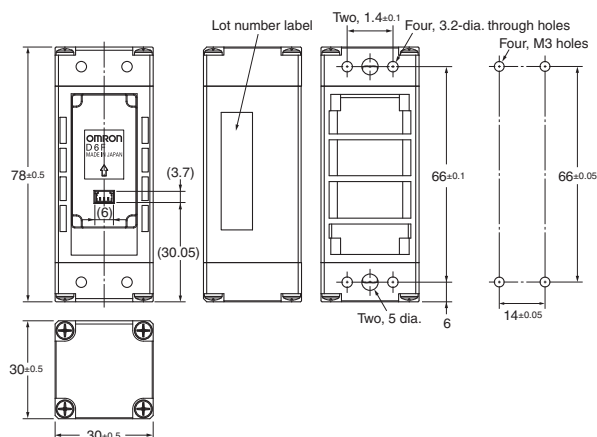


D6F-A6

MEMS Flow Sensor

High-accuracy Sensing with a Compact Body for Flow Rates up to 50 L/min.

▶ Air ▶ Gas ▶ Analog

- Accurately measures an air mass flow rate of 10 to 50 L/min.
- A compact size of 30 × 78 × 30 mm (H × W × D).



RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 40.

Ordering Information

MEMS Flow Sensor

| Flow Port Type | Applicable fluid | Flow rate range | Model |
|----------------|------------------|-----------------|----------------------|
| Rc 1/4 thread | Air | 0 to 10 L/min | D6F-10A6-000 |
| | | 0 to 20 L/min | D6F-20A6-000 |
| | | 0 to 50 L/min | D6F-50A6-000 |
| NPT 1/8 thread | | 0 to 10 L/min | D6F-10A61-000 |
| | | 0 to 20 L/min | D6F-20A61-000 |
| | | 0 to 50 L/min | D6F-50A61-000 |

Accessory (Sold separately)

| Type | Model |
|-------|-------------------|
| Cable | D6F-CABLE1 |

Note: Refer to *Accessories for the D6F Series* on page 39.

Connections

D6F-10A6-000 **D6F-10A61-000**
D6F-20A6-000 **D6F-20A61-000**
D6F-50A6-000 **D6F-50A61-000**

Pin No. 1: Vcc
 2: Vout
 3: GND
 Connector 53398-03** (Made by Molex Japan)


Use the following connectors for connections to the D6F:
 Housing 51021-0300 (Made by Molex Japan)
 Terminals 50079 (Made by Molex Japan)
 Wires AWG28 to AWG26

1: Vcc 2: Vout 3: GND



Output Voltage Characteristics


D6F-10A6-000
D6F-10A61-000



D6F-20A6-000
D6F-20A61-000



D6F-50A6-000
D6F-50A61-000



D6F-10A6-000/D6F-10A61-000

| Flow rate L/min (normal) | 0 | 2.0 | 4.0 | 6.0 | 8.0 | 10.0 |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V | 1.00 ±0.12 | 1.75 ±0.12 | 2.60 ±0.12 | 3.45 ±0.12 | 4.25 ±0.12 | 5.00 ±0.12 |

D6F-20A6-000/D6F-20A61-000

| Flow rate L/min (normal) | 0 | 4 | 8 | 12 | 16 | 20 |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V | 1.00 ±0.12 | 1.93 ±0.12 | 2.87 ±0.12 | 3.70 ±0.12 | 4.41 ±0.12 | 5.00 ±0.12 |

D6F-50A6-000/D6F-50A61-000

| Flow rate L/min (normal) | 0 | 10 | 20 | 30 | 40 | 50 |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V | 1.00 ±0.12 | 2.45 ±0.12 | 3.51 ±0.12 | 4.20 ±0.12 | 4.66 ±0.12 | 5.00 ±0.12 |

Measurement conditions: Power supply voltage of 12±0.1 VDC, ambient temperature of 25±5°C, and ambient humidity of 35% to 75%.

Characteristics/Performance

| Model | D6F-10A6-000 | D6F-20A6-000 | D6F-50A6-000 | D6F-10A61-000 | D6F-20A61-000 | D6F-50A61-000 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|---------------|---------------|----------------|---------------|---------------|
| Flow Range (See note 1.) | 0 to 10 L/min | 0 to 20 L/min | 0 to 50 L/min | 0 to 10 L/min | 0 to 20 L/min | 0 to 50 L/min |
| Calibration Gas (See note 2.) | Air | | | | | |
| Flow Port Type | Rc 1/4 thread | | | NPT 1/8 thread | | |
| Electrical Connection | Three-pin connector | | | | | |
| Power Supply | 10.8 to 26.4 VDC | | | | | |
| Current Consumption | 15 mA max. with no load, with a Vcc of 12 to 24 VDC, and at 25°C | | | | | |
| Output Voltage | 1 to 5 VDC (non-linear output, load resistance of 10kΩ min.) | | | | | |
| Accuracy | ±3% FS (25°C characteristic) | | | | | |
| Repeatability (See note 3.) | ±0.3% FS | | | | | |
| Output Voltage (Max.) | 5.7 VDC (Load resistance: 10 kΩ) | | | | | |
| Output Voltage (Min.) | 0 VDC (Load resistance: 10 kΩ) | | | | | |
| Rated Power Supply Voltage | 26.4 VDC | | | | | |
| Rated Output Voltage | 6 VDC | | | | | |
| Case | PPS/aluminum alloy | | | | | |
| Degree of Protection | IEC IP40 (Excluding tubing sections.) | | | | | |
| Withstand Pressure | 500 kPa | | | | | |
| Pressure Drop (See note 3.) | 0.10 kPa | 0.28 kPa | 1.44 kPa | 0.15 kPa | 0.52 kPa | 2.31 kPa |
| Operating Temperature (See note 4.) | -10 to 60°C | | | | | |
| Operating Humidity (See note 4.) | 35% to 85% | | | | | |
| Storage Temperature (See note 4.) | -30 to 80°C | | | | | |
| Storage Humidity (See note 4.) | 35% to 85% | | | | | |
| Temperature Characteristics | ±3% FS for 25°C characteristic at an ambient temperature of -10 to 60°C | | | | | |
| Insulation Resistance | Between Sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC) | | | | | |
| Dielectric Strength | Between Sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) | | | | | |
| Weight | 103 g | | | | | |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)


Note: 3. Reference (typical)

Note: 4. With no condensation or icing.

Dimensions (Unit: mm)

MEMS Flow Sensors

Mounting Hole Dimensions

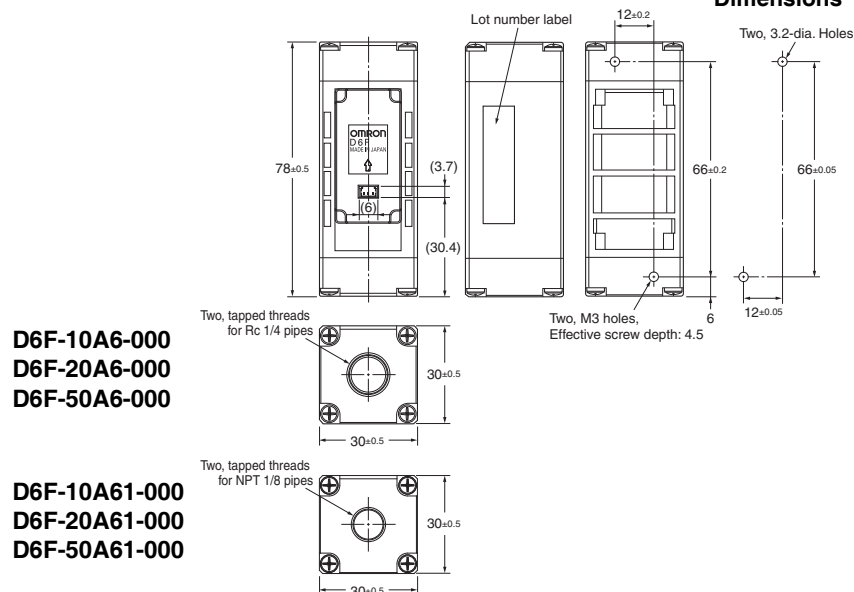

D6F-A7/-L7/-N7

MEMS Flow Sensor

Reduction of Piping time by quick joint connection

Air Gas Analog

- Low-flow rate of natural gas and LP gas can be measured.
- 10 L/min and 30 L/min of Air can be measured.
- Compact size of 30 × 84.6 × 30 mm (H × W × D).



RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 40.

Ordering Information

MEMS Flow Sensor

| Flow Port Type | Applicable fluid | Flow rate range | Model |
|-----------------|-------------------|-----------------|---------------------|
| Quick joint P10 | Natural gas (13A) | 0 to 5 L/min | D6F-05N7-000 |
| | LP gas | 0 to 2 L/min | D6F-02L7-000 |
| | Air | 0 to 10 L/min | D6F-10A7-000 |
| | | 0 to 30 L/min | D6F-30A7-000 |

Accessories (Sold separately)

| Type | Model |
|----------------|-------------------------|
| Cable | D6F-CABLE1 |
| Quick fastener | D6F-FASTENER-P10 |
| Pipe fittings | D6F-PLG1 |


Note: Refer to *Accessories for the D6F Series* on page 39.

Connections

D6F-05N7-000 D6F-02L7-000
D6F-10A7-000 D6F-30A7-000


Pin No. 1: Vcc
2: Vout
3: GND
Connector 53398-03** (Made by Molex Japan)

Use the following connectors for connections to the D6F:
Housing 51021-0300 (Made by Molex Japan)
Terminals 50079 (Made by Molex Japan)
Wires AWG28 to AWG26

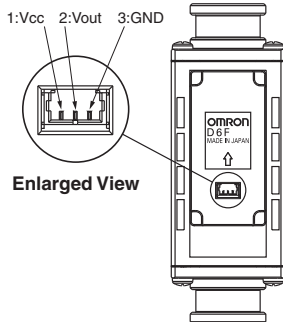


Output Voltage Characteristics


D6F-05N7-000




D6F-02L7-000



D6F-10A7-000



D6F-30A7-000



D6F-05N7-000

| Flow rate L/min (normal) | 0 | 1.0 | 2.0 | 3.0 | 4.0 | 5.0 |
|--------------------------|-------|-------|-------|-------|-------|-------|
| Output voltage V | 1.00 | 1.68 | 2.47 | 3.31 | 4.15 | 5.00 |
| | ±0.12 | ±0.12 | ±0.12 | ±0.12 | ±0.12 | ±0.12 |

D6F-02L7-000

| Flow rate L/min (normal) | 0 | 0.4 | 0.8 | 1.2 | 1.6 | 2.0 |
|--------------------------|-------|-------|-------|-------|-------|-------|
| Output voltage V | 1.00 | 1.96 | 2.89 | 3.72 | 4.43 | 5.00 |
| | ±0.12 | ±0.12 | ±0.12 | ±0.12 | ±0.12 | ±0.12 |

D6F-10A7-000

| Flow rate L/min (normal) | 0 | 2.0 | 4.0 | 6.0 | 8.0 | 10.0 |
|--------------------------|-------|-------|-------|-------|-------|-------|
| Output voltage V | 1.00 | 1.75 | 2.60 | 3.45 | 4.25 | 5.00 |
| | ±0.12 | ±0.12 | ±0.12 | ±0.12 | ±0.12 | ±0.12 |

D6F-30A7-000

| Flow rate L/min (normal) | 0 | 6 | 12 | 18 | 24 | 30 |
|--------------------------|-------|-------|-------|-------|-------|-------|
| Output voltage V | 1.00 | 2.11 | 3.12 | 3.91 | 4.53 | 5.00 |
| | ±0.12 | ±0.12 | ±0.12 | ±0.12 | ±0.12 | ±0.12 |

Measurement conditions: Power-supply voltage 12±0.1 VDC, ambient temperature 25±5°C and ambient humidity 35 to 75%RH.

Characteristics/Performance

| Model | D6F-05N7-000 | D6F-02L7-000 | D6F-10A7-000 | D6F-30A7-000 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------|---------------|---------------|
| Flow Range (See note 1.) | 0 to 5 L/min | 0 to 2 L/min | 0 to 10 L/min | 0 to 30 L/min |
| Calibration Gas (See note 2.) | Natural gas (13A) | LP gas | Air | |
| Flow Port Type | Quick joint P10 | | | |
| Electrical Connection | Three-pin connector | | | |
| Power Supply | 10.8 to 26.4 VDC | | | |
| Current Consumption | 15 mA max. with no load and Vcc of 12 to 24 VDC, GND = 0 VDC, 25°C | | | |
| Output Voltage | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ min.) | | | |
| Accuracy | ±3%F.S. (25°C characteristic) | | | |
| Repeatability (See note 3.) | ±0.3%F.S. | | | |
| Output Voltage (Max.) | 5.7 VDC (Load resistance: 10 kΩ) | | | |
| Output Voltage (Min.) | 0 VDC (Load resistance: 10 kΩ) | | | |
| Rated Power Supply Voltage | 26.4 VDC | | | |
| Rated Output Voltage | 6 VDC | | | |
| Case | PPS | | | |
| Degree of Protection | IEC IP40 (Excluding tubing sections.) | | | |
| Withstand Pressure | 500 kPa | | | |
| Pressure Drop (See note 3.) | 0.06 kPa | 0.03 kPa | 0.32 kPa | 2.19 kPa |
| Operating Temperature (See note 4.) | -10 to +60°C | | | |
| Operating Humidity (See note 4.) | 35 to 85%RH | | | |
| Storage Temperature (See note 4.) | -10 to +80°C | | -30 to +80°C | |
| Storage Humidity (See note 4.) | 35 to 85%RH | | | |
| Temperature Characteristics | ±3%F.S. for 25°C characteristic at an ambient temperature of -10 to +60°C | | | |
| Insulation Resistance | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC) | | | |
| Dielectric Strength | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) | | | |
| Weight | 72 g | | | |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.

Dimensions (Unit: mm)


MEMS Flow Sensors

D6F-05N7-000


D6F-02L7-000

D6F-10A7-000

D6F-30A7-000

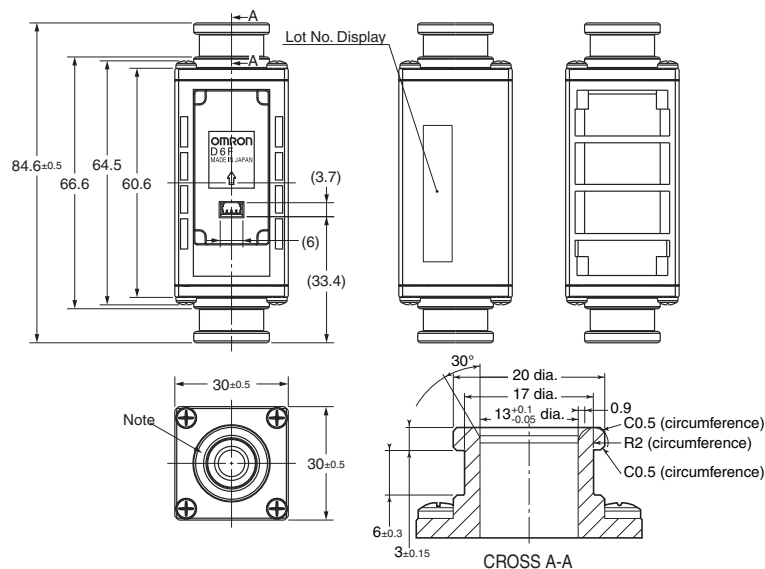

Recommended Quick joint male P10 type

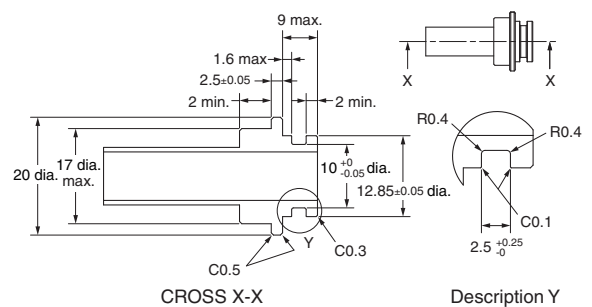

If using a Rc3/8 converter joint, the following is recommended.
 REGAL JOINT CO., LTD eigyou@rjl.co.jp
 Converter male joint (Rc3/8-Quick male joint): Adapter Rc3/8-QJM10
 O ring: O ring P10 fluororubber (material)

Note. The Port type of pipe fitting based on "Quick Joint P10 Type".

* P10 shows the name of an O-ring prescribed by JIS B 2401.

* The port of O-ring ditch is based on P10 of JIS B 2406.

* Please obtain a male joint separately.

D6F-A7D/-AB71D

MEMS Flow Sensor

Digital Compensation for High Accuracy

- Temperature compensation and linear compensation produce high accuracy ($\pm 3\%$ RD (25% to 100% FS)).
- Compact models for 10 to 70 L/min.
- Reduced piping work with quick-fastening feature.

RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 40.



Digital

NEW

Ordering Information

MEMS Flow Sensor

| Joint | Applicable fluid | Flow rate range | Model |
|-----------------|------------------|-----------------|--------------------------|
| Quick joint P10 | Air | 0 to 10 L/min | D6F-10A7D-000-0 |
| | | 0 to 20 L/min | D6F-20A7D-000-0 |
| | | 0 to 50 L/min | D6F-50A7D-000-0 |
| Quick joint P14 | | 0 to 70 L/min | D6F-70AB71D-000-0 |

Accessories (Sold separately)

| Type | Model |
|----------------|-------------------------|
| Cable | D6F-CABLE3 |
| Quick fastener | D6F-FASTENER-P10 |
| Pipe fittings | D6F-PLG1 |

Note: Refer to *Accessories for the D6F Series* on page 39.

Connections

D6F-10A7D-000-0

D6F-20A7D-000-0

D6F-50A7D-000-0

D6F-70AB71D-000-0

Pin No. 1: Vcc
2: SDA
3: SCL
4: GND


Connector BM04B-GHS (made by J.S.T. Mfg. Co.)

Use the following connectors for connections to the D6F:

Housing GHR-04V-S (made by J.S.T. Mfg. Co.)


Terminals SSSL-002T-P0.2 (made by J.S.T. Mfg. Co.)

Wires AWG26 to AWG30




Output Characteristics


D6F-10A7D-000-0




D6F-20A7D-000-0



D6F-50A7D-000-0



D6F-70AB71D-000-0



D6F-10A7D-000-0

| Flow rate L/min (normal) | 0 | 2 | 4 | 6 | 8 | 10 |
|--------------------------|-------------|--------------|--------------|--------------|--------------|--------------|
| Output (HEX) | 1024 (0400) | 13024 (32E0) | 25024 (61C0) | 37024 (90A0) | 49024 (BF80) | 61024 (EE60) |

Measurement conditions: Power-supply voltage 3.3 ± 0.1 VDC, ambient temperature $25 \pm 5^\circ\text{C}$ and ambient humidity 35 to 75%RH.

Flow rate = (Output value - 1,024)/60,000 x 10

D6F-20A7D-000-0

| Flow rate L/min (normal) | 0 | 4 | 8 | 12 | 16 | 20 |
|--------------------------|-------------|--------------|--------------|--------------|--------------|--------------|
| Output (HEX) | 1024 (0400) | 13024 (32E0) | 25024 (61C0) | 37024 (90A0) | 49024 (BF80) | 61024 (EE60) |

Measurement conditions: Power-supply voltage 3.3 ± 0.1 VDC, ambient temperature $25 \pm 5^\circ\text{C}$ and ambient humidity 35 to 75%RH.

Flow rate = (Output value - 1,024)/60,000 x 20

D6F-50A7D-000-0

| Flow rate L/min (normal) | 0 | 10 | 20 | 30 | 40 | 50 |
|--------------------------|-------------|--------------|--------------|--------------|--------------|--------------|
| Output (HEX) | 1024 (0400) | 13024 (32E0) | 25024 (61C0) | 37024 (90A0) | 49024 (BF80) | 61024 (EE60) |

Measurement conditions: Power-supply voltage 3.3 ± 0.1 VDC, ambient temperature $25 \pm 5^\circ\text{C}$ and ambient humidity 35 to 75%RH.

Flow rate = (Output value - 1,024)/60,000 x 50

D6F-70AB71D-000-0

| Flow rate L/min (normal) | 0 | 20 | 40 | 60 | 70 |
|--------------------------|-------------|--------------|--------------|--------------|--------------|
| Output (HEX) | 1024 (0400) | 13024 (32E0) | 25024 (61C0) | 37024 (90A0) | 43024 (A810) |

Measurement conditions: Power-supply voltage 3.3 ± 0.1 VDC, ambient temperature $25 \pm 5^\circ\text{C}$ and ambient humidity 35 to 75%RH.

Flow rate = (Output value - 1,024)/60,000 x 100

Characteristics/Performance

| Model | D6F-10A7D-000-0 | D6F-20A7D-000-0 | D6F-50A7D-000-0 | D6F-70AB71D-000-0 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------|-----------------|--------------------------------------------------------------------------------|
| Flow Range (See note 1.) | 0 to 10L/min | 0 to 20 L/min | 0 to 50 L/min | 0 to 70 L/min |
| Calibration Gas (See note 2.) | Air | | | |
| Flow Port Type | Quick joint P10 | | | Quick joint P14 |
| Electrical Connection | Four-pin connector | | | |
| Power Supply | 3.0 to 3.6 VDC | | | |
| Current Consumption | 10 mA max. with no load, Vcc = 3.3 VDC, GND = 0 VDC, 25°C | | | |
| Resolution | 15 bit | | | |
| Accuracy (See note 3.) | ±5%RD (10%F.S. ≤ Flow rate < 25%F.S.) ±3%RD (25%F.S. ≤ Flow rate ≤ 100%F.S.) | | | ±5%RD (10L/min ≤ Flow rate < 20L/min) ±3%RD (20L/min ≤ Flow rate ≤ 70L/min) |
| Response time | 90 ms max. | | | |
| Repeatability (See note 4.) | 0.3 %RD | 0.3%RD | 0.5%RD | 1.3%RD |
| Interface (See note 5.) | I2C | | | |
| Case | PPS | | | |
| Degree of Protection | IEC IP40 (Excluding tubing sections.) | | | |
| Withstand Pressure | 100 kPa | | | |
| Pressure Drop (See note 4.) | 0.034 kPa | 0.083 kPa | 0.28 kPa | 0.57 kPa |
| Operating Temperature (See note 6.) | -10 to +60°C | | | |
| Operating Humidity (See note 6.) | 35 to 85%RH | | | |
| Storage Temperature (See note 6.) | -30 to +80°C | | | |
| Storage Humidity (See note 6.) | 35 to 85%RH | | | |
| Insulation Resistance | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC) | | | |
| Dielectric Strength | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) | | | |
| Weight | 57.3 g | | | 64.4 g |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note: 2. Dry gas (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. -10 ≤ Operating Temperature ≤ 60°C

Note: 4. Reference (typical)

Note: 5. Refer to the D6F-□□□□D-000-□ Application Notes for details.

Note: 6. With no condensation or icing.

Note: 7. The following custom options are available.

Ask your OMRON representative for details.

- Temperature measurement
- Address settings (up to four addresses)
- Fault detection
- Threshold setting

Communication

| | |
|------------------|------------------------------------------------------|
| Serial Interface | I2C |
| Master/Slave | Slave / Address: HEX : 0x6C BIN : 110_1100 (7bit) |
| Speed mode | Fast Mode 400kHz |
| Signal | |
| SCL | Serial Clock |
| SDA | Data Signal |

Dimensions (Unit: mm)

MEMS Flow Sensors


D6F-10A7D-000-0

D6F-20A7D-000-0

D6F-50A7D-000-0



Recommended Quick joint male P10 type

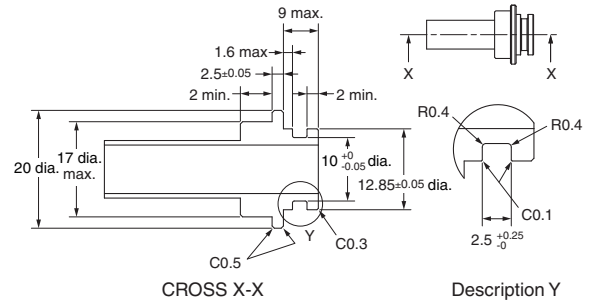

If using a Rc3/8 converter joint, the following is recommended.

REGAL JOINT CO., LTD eigyou@rgl.co.jp

Converter male joint (Rc3/8-Quick male joint): Adapter Rc3/8-QJM10
O ring: O ring P10 fluororubber (material)

Note 1. Note . The Port type of pipe fitting based on "Quick Joint P10 Type".

* P10 shows the name of an O-ring prescribed by JIS B 2401.

* The port of O-ring ditch is based on P10 of JIS B 2406.

* Please obtain a male joint separately.

Note 2. Use the following connectors to connect to the Sensor.


Connector :GHR-04V-S (JST)

Terminals :SSHL-002T-P0.2 (JST)


Wires :AWG26 to AWG30

Circuit numbers :1.Vcc, 2.SDA, 3.SCL, 4.GND

D6F-70AB71D-000-0

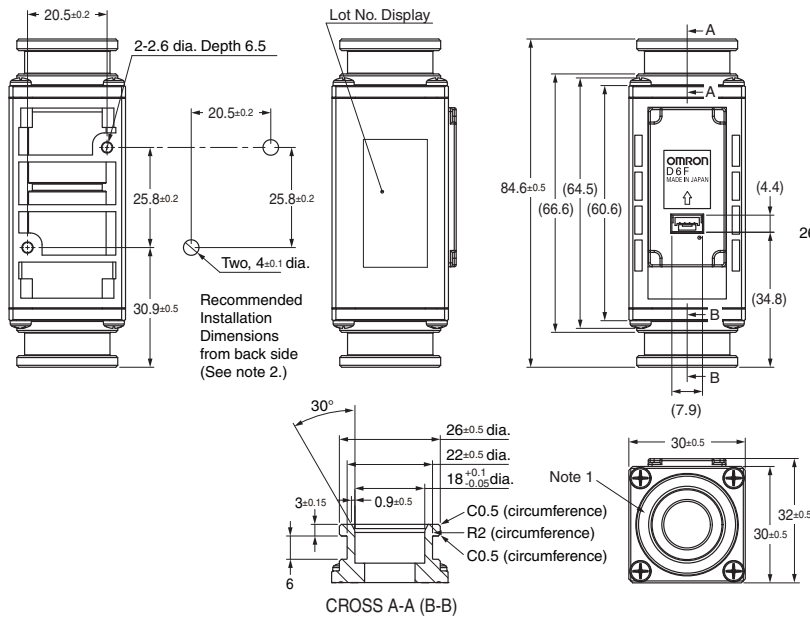

Recommended Quick joint male P14 type

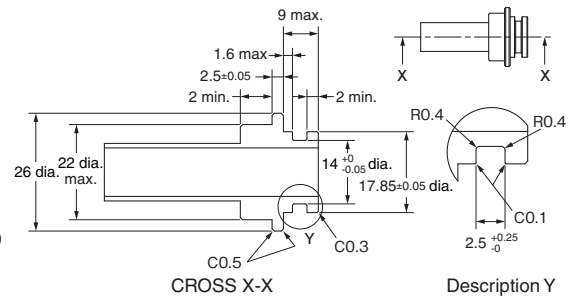

If using a Rc3/8 converter joint, the following is recommended.

REGAL JOINT CO., LTD eigyou@rgl.co.jp

Converter male joint (Rc3/8-Quick male joint): Adapter Rc3/8-QJM14
O ring: O ring P14 fluororubber (material)

Note 1. The Port type of pipe fitting based on "Quick Joint P14 Type".

* P14 shows the name of an O-ring prescribed by JIS B 2401.

* The port of O-ring ditch is based on P14 of JIS B 2406.

* Please obtain a male joint separately.

Note 2. To mount the Sensor with 2.6-dia. holes, use P-type

self-tapping screws with a nominal diameter of 3 mm and

tighten them to a torque of 1.2 N·m max.

The screw threads must engage for 5.5 mm min.

Note 3. Use the following connectors to connect to the Sensor.

Connector :GHR-04V-S (JST)

Terminals :SSHL-002T-P0.2 (JST)

Wires :AWG26 to AWG30

Circuit numbers :1.Vcc, 2.SDA, 3.SCL, 4.GND

D6F-AB71

MEMS Flow Sensor

Reduction of Piping time by quick joint connection

Air Analog

- Reduce the influence of pulsation flow by bypass flow path
- 30 L/min and 70 L/min of Air can be measured.
- Compact size of 30 × 84.6 × 32 mm (H × W × D).



RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 40.

Ordering Information

MEMS Flow Sensor

| Flow Port Type | Applicable fluid | Flow rate range | Model |
|-----------------|------------------|-----------------|-----------------------|
| Quick joint P14 | Air | 0 to 30 L/min | D6F-30AB71-000 |
| | | 0 to 70 L/min | D6F-70AB71-000 |

Accessory (Sold separately)

| Type | Model |
|-------|-------------------|
| Cable | D6F-CABLE1 |

Note: Refer to *Accessories for the D6F Series* on page 39.


Connections

D6F-30AB71-000 D6F-70AB71-000

| | |
|-----------|----------------------------------|
| Pin No. | 1: Vcc 2: Vout 3: GND |
| Connector | 53398-03** (Made by Molex Japan) |


Use the following connectors for connections to the D6F:

| | |
|-----------|----------------------------------|
| Housing | 51021-0300 (Made by Molex Japan) |
| Terminals | 50079 (Made by Molex Japan) |
| Wires | AWG28 to AWG26 |




Output Voltage Characteristics

D6F-30AB71-000

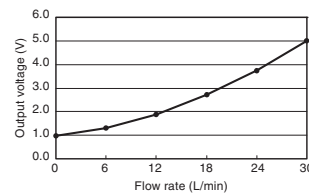

D6F-70AB71-000

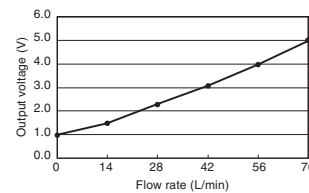

D6F-30AB71-000

| Flow rate L/min (normal) | 0 | 6 | 12 | 18 | 24 | 30 |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V | 1.00 ±0.12 | 1.25 ±0.12 | 1.91 ±0.12 | 2.75 ±0.12 | 3.78 ±0.12 | 5.00 ±0.12 |

D6F-70AB71-000

| Flow rate L/min (normal) | 0 | 14 | 28 | 42 | 56 | 70 |
|--------------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Output voltage V | 1.00 ±0.12 | 1.43 ±0.12 | 2.25 ±0.12 | 3.14 ±0.12 | 4.06 ±0.12 | 5.00 ±0.12 |

Measurement conditions: Power-supply voltage 12±0.1 VDC, ambient temperature 25±5°C and ambient humidity 35 to 75%RH.

Characteristics/Performance

| Model | D6F-30AB71-000 | D6F-70AB71-000 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|----------------|
| Flow Range (See note 1.) | 0 to 30 L/min | 0 to 70 L/min |
| Calibration Gas (See note 2.) | Air | |
| Flow Port Type | Quick joint P14 | |
| Electrical Connection | Three-pin connector | |
| Power Supply | 10.8 to 26.4 VDC | |
| Current Consumption | 15 mA max. with no load and Vcc of 12 to 24 VDC, GND = 0 VDC, 25°C | |
| Output Voltage | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ min.) | |
| Accuracy | ±3%F.S. (25°C characteristic) | |
| Repeatability (See note 3.) | ±0.3%F.S. | |
| Output Voltage (Max.) | 5.7 VDC (Load resistance: 10 kΩ) | |
| Output Voltage (Min.) | 0 VDC (Load resistance: 10 kΩ) | |
| Rated Power Supply Voltage | 26.4 VDC | |
| Rated Output Voltage | 6 VDC | |
| Case | PPS | |
| Degree of Protection | IEC IP40 (Excluding tubing sections.) | |
| Withstand Pressure | 100 kPa | |
| Pressure Drop (See note 3.) | 0.88 kPa | 3.49 kPa |
| Operating Temperature (See note 4.) | -10 to +60°C | |
| Operating Humidity (See note 4.) | 35 to 85%RH | |
| Storage Temperature (See note 4.) | -30 to +80°C | |
| Storage Humidity (See note 4.) | 35 to 85%RH | |
| Temperature Characteristics | ±3%F.S. for 25°C characteristic at an ambient temperature of -10 to +60°C | |
| Insulation Resistance | Between sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC) | |
| Dielectric Strength | Between sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) | |
| Weight | 75 g | |

Note 1. Volumetric flow rate at 0°C, 101.3 kPa.

Note 2. Dry gas (must not contain large particles, e.g., dust, oil, or mist.)

Note 3. Reference (typical)


Note 4. With no condensation or icing.

Dimensions (Unit: mm)


MEMS Flow Sensors

D6F-30AB71-000

D6F-70AB71-000

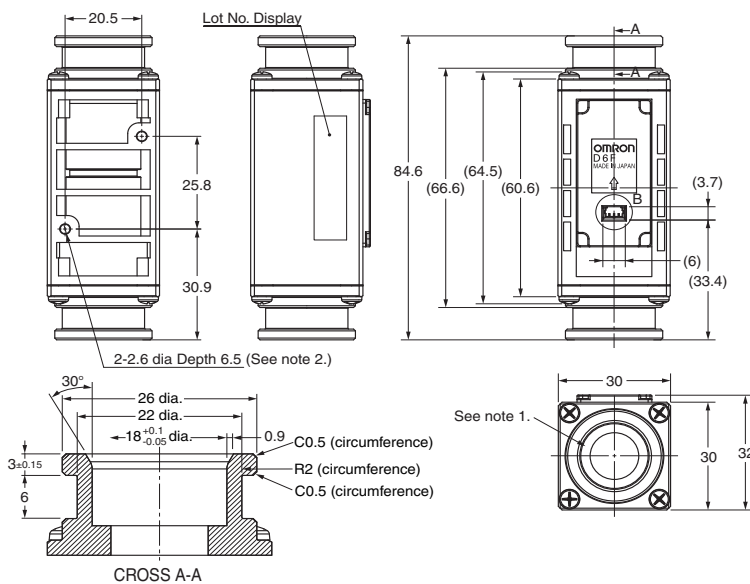

Recommended Quick joint male P14 type

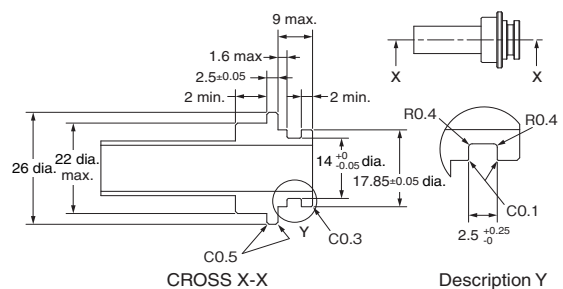

CROSS X-X

Description Y

If using a Rc3/8 converter joint, the following is recommended.

REGAL JOINT CO., LTD eigyou@rjl.co.jp

Converter male joint (Rc3/8-Quick male joint): Adapter Rc3/8-QJM14

O ring: O ring P14 fluororubber (material)

Note 1. The flow path inlet and outlet ports conform to P14-type female quick-connect joints.

(The tube inlet and outlet ports have the same shape.)

* P14 is the number of an O-ring specified in JIS B 2401.

* The O-ring groove in the male joint must conform to P14 in JIS B 2406.

* Please obtain a male joint separately.

Note 2. To mount the Sensor with 2.6-dia. holes, use P-type self-tapping screws with a nominal diameter of 3 mm and tighten them to a torque of 1.2 N·m max. The screw threads must engage for 5.5 mm min.

Note 3. Use the following connectors to connect to the Sensor.

Connector : GHR-04V-S (JST)

Terminals : SSHL-002T-P0.2 (JST)

Wires : AWG26 to AWG30

Circuit numbers : 1. Vcc, 2. SDA, 3. SCL, and 4. GND.


D6F-P

MEMS Flow Sensor

A Compact, High-accuracy Flow Sensor with Superior Resistance to Environments.

▶ Air ▶ Analog

- Anti-dust performance is improved using the Cyclon method.
- A full lineup of models with different connector types: bamboo joints, lead terminals for direct mounting on-board, and manifolds.
- High accuracy of $\pm 5\%$ FS.

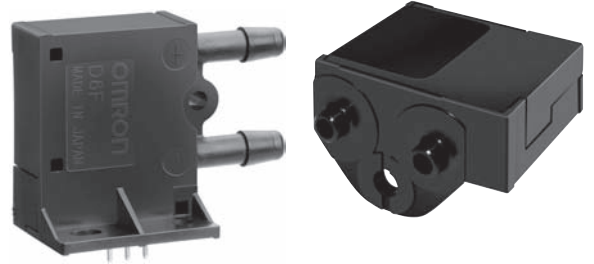

RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 40.

Ordering Information

MEMS Flow Sensor

| Flow Port Type | Connection | Applicable fluid | Flow rate range | Model |
|----------------|----------------|------------------|-----------------|---------------------|
| Bamboo joint | Lead terminals | Air | 0 to 0.1 L/min | D6F-P0001A1 |
| | | | 0 to 1 L/min | D6F-P0010A1 |
| Manifold | Connector | | 0 to 1 L/min | D6F-P0010A2 |
| | | | | D6F-P0010AM2 |


Accessory (Sold separately)

| Type | Model |
|-------|---------------------|
| Cable | D6F-CABLE2 |
| | D6F-CABLE2-L |

Note: Refer to *Accessories for the D6F Series* on page 39.

Output Voltage Characteristics


D6F-P0001A1



| Flow rate L/min (normal) | 0 | 0.02 | 0.04 | 0.06 | 0.08 | 0.10 |
|--------------------------|------------|------------|------------|------------|------------|------------|
| Output voltage V | 0.50 | 0.90 | 1.30 | 1.70 | 2.10 | 2.50 |
| | ± 0.10 | ± 0.10 | ± 0.10 | ± 0.10 | ± 0.10 | ± 0.10 |

Measurement conditions: Power supply voltage of 5.0 ± 0.1 VDC, ambient temperature of $25 \pm 5^\circ\text{C}$, and ambient humidity of 35% to 75%.

D6F-P0010A1/-P0010A2/-P0010AM2



| Flow rate L/min (normal) | 0 | 0.25 | 0.50 | 0.75 | 1.00 |
|--------------------------|------------|------------|------------|------------|------------|
| Output voltage V | 0.50 | 1.60 | 2.10 | 2.31 | 2.50 |
| | ± 0.10 | ± 0.10 | ± 0.10 | ± 0.10 | ± 0.10 |

Measurement conditions: Power supply voltage of 5.0 ± 0.1 VDC, ambient temperature of $25 \pm 5^\circ\text{C}$, and ambient humidity of 35% to 75%.

Characteristics/Performance

| Model | D6F-P0001A1 | D6F-P0010A1 | D6F-P0010A2 | D6F-P0010AM2 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|--------------|---------------------|--------------|
| Flow Range (See note 1.) | 0 to 0.1 L/min | 0 to 1 L/min | | |
| Calibration Gas (See note 2.) | Air | | | |
| Flow Port Type | Bamboo joint Maximum outside diameter: 4.9 mm, minimum outside diameter: 4.0 mm | | | Manifold |
| Electrical Connection | Lead terminals | | Three-pin connector | |
| Power Supply | 4.75 to 5.25 VDC | | | |
| Current Consumption | 15 mA max. with no load and a Vcc of 5.0 V | | | |
| Output Voltage | 0.5 to 2.5 VDC (Load resistance: 10 kΩ) | | | |
| Accuracy | ±5% FS (25°C characteristic) | | | |
| Repeatability (See note 3.) | ±1.0% FS | ±0.4% FS | | |
| Output Voltage (Max.) | 3.1 VDC (Load resistance: 10 kΩ) | | | |
| Output Voltage (Min.) | 0 VDC (Load resistance: 10 kΩ) | | | |
| Rated Power Supply Voltage | 10 VDC | | | |
| Rated Output Voltage | 4 VDC | | | |
| Case | PBT | | | |
| Degree of Protection | IEC IP40 (Excluding tubing sections.) | | | |
| Withstand Pressure (See note 3.) | 50 kPa | | | |
| Pressure Drop (See note 3.) | 0.005 kPa | 0.19 kPa | | 0.67 kPa |
| Operating Temperature (See note 4.) | -10 to +60°C | | | |
| Operating Humidity (See note 4.) | 35% to 85% | | | |
| Storage Temperature (See note 4.) | -40 to +80°C | | | |
| Storage Humidity (See note 4.) | 35% to 85% | | | |
| Temperature Characteristics | ±5% FS for 25°C characteristic at an ambient temperature of -10 to +60°C | | | |
| Insulation Resistance | Between Sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC) | | | |
| Dielectric Strength | Between Sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) | | | |
| Weight | 8.5 g | | | 8.0 g |

Note: 1. Volumetric flow rate at 0°C, 101.3 kPa.


Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)


Note: 4. With no condensation or icing.

Tubing


You can measure large flows by mounting the Sensor on a bypass.

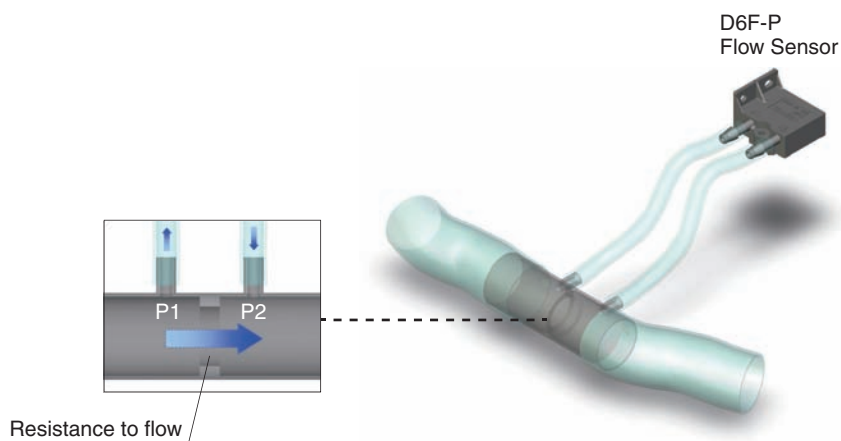

Mounting Direction Bamboo joint Sensor

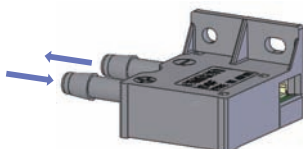


Manifold-type Sensor



Connections/Dimensions (Unit: mm)


● Lead Terminals

D6F-P0001A1/D6F-P0010A1

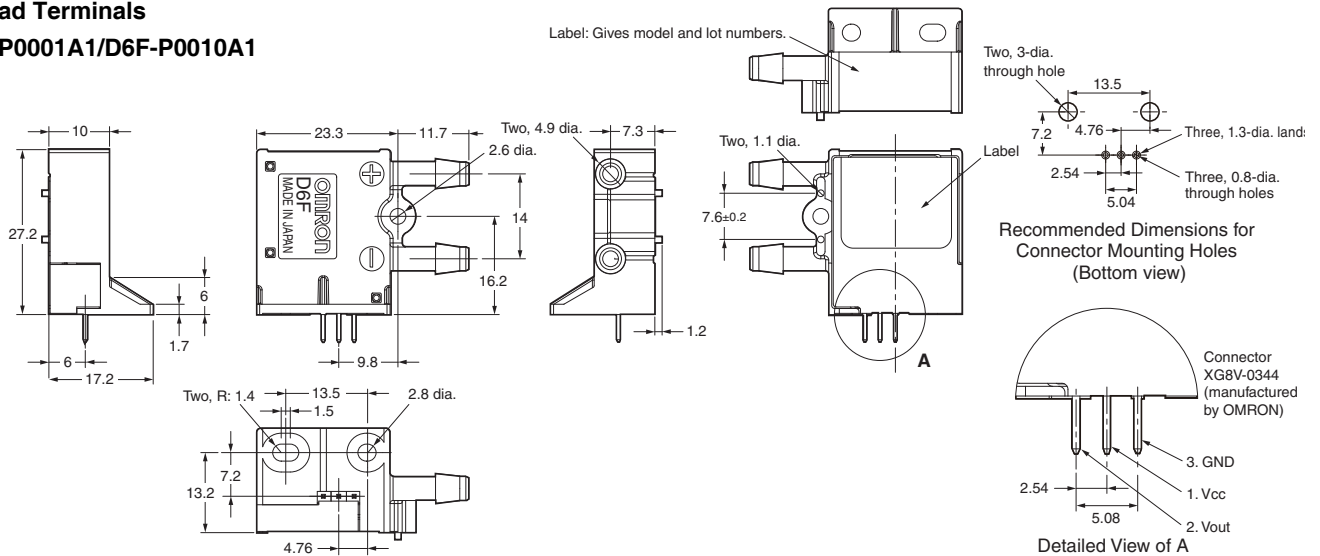


● Connectors


D6F-P0010A2

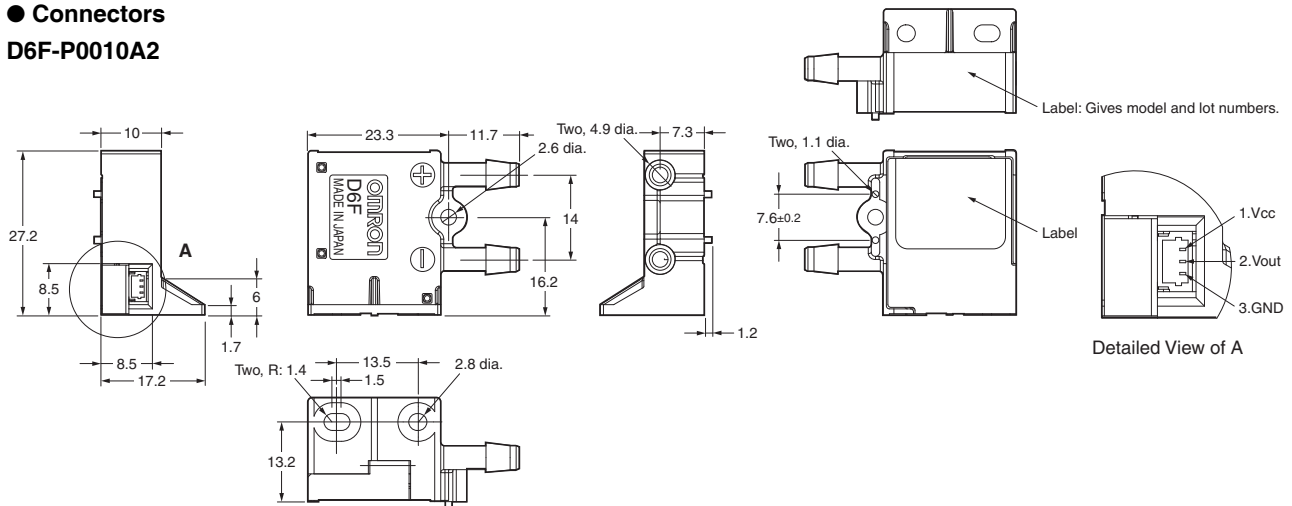

D6F-P0010AM2

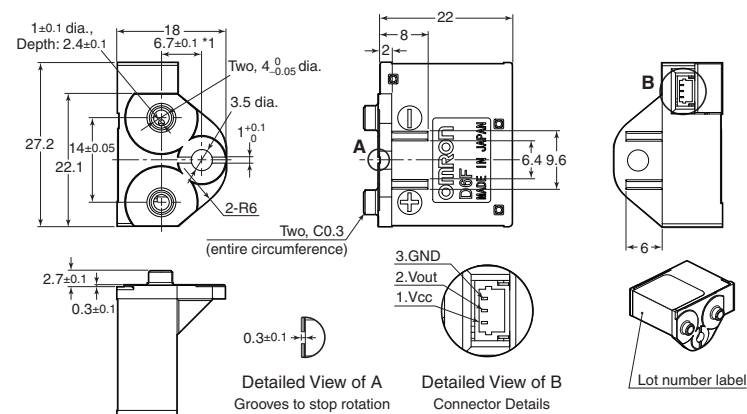

*1. Recommended Installation Dimensions

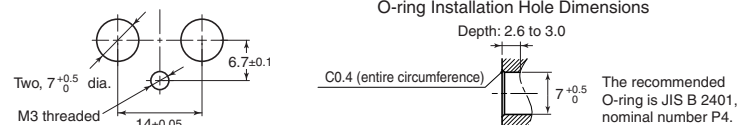

Pin No. 1: Vcc
2: Vout
3: GND

Connector SM03B-SRSS-TB (made by J.S.T. Mfg. Co.)

Note: Use one of the following connectors from JST Mfg. Co., Ltd. to connect to the D6F.

- 1) Pressure welding connector
Socket: 03SR-3S
Wire: AWG#30
Or
- 2) Crimp type connector
Contact: SSH-003T-P0.2
Housing: SHR-03V-S
Wire: AWG#32 to #28

Tubes

Install tubes made of materials such as rubber or urethane so that they will not come out.

For urethane tubes, tubes with an outer diameter of 6 mm and an inner diameter of 4 mm are recommended.

Soldering Conditions

Use a soldering iron for 5 s at 350°C with a pressure of 100 gf max.

(This applies only to PCB-mounting Sensors.)

D6F-PH

MEMS Differential pressure Sensor

A Compact, High-accuracy Differential Pressure Sensor with Superior Resistance to Environments.

 Air  Digital

- High accuracy of $\pm 3\%$ RD
- Linearized and temperature compensated
- Digital output (I2C communication)
- High flow impedance to reduce the influence of bypass configuration
- Lineup of 4 types of slave address models



RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 40.

Ordering Information

| Applicable fluid (See note 1.) | Measurement range (See note 3.) | slave address (7 bit) | Model |
|--------------------------------|---------------------------------|-----------------------|-----------------|
| Air (See note 2.) | 0 to 250 Pa | 0b110_1100, 0x6C | D6F-PH0025AD1 |
| | | 0b110_1101, 0x6D | D6F-PH0025AD1-1 |
| | | 0b110_1110, 0x6E | D6F-PH0025AD1-2 |
| | | 0b110_1111, 0x6F | D6F-PH0025AD1-3 |
| | -50 to 50 Pa | 0b110_1100, 0x6C | D6F-PH0505AD3 |
| | | 0b110_1101, 0x6D | D6F-PH0505AD3-1 |
| | | 0b110_1110, 0x6E | D6F-PH0505AD3-2 |
| | | 0b110_1111, 0x6F | D6F-PH0505AD3-3 |
| | -500 to 500 Pa | 0b110_1100, 0x6C | D6F-PH5050AD3 |
| | | 0b110_1101, 0x6D | D6F-PH5050AD3-1 |
| | | 0b110_1110, 0x6E | D6F-PH5050AD3-2 |
| | | 0b110_1111, 0x6F | D6F-PH5050AD3-3 |


Note: 1. The Sensor be calibrated for different gas types. Consult your Omron representative.

Note: 2. Dry gas must not contain large particles, e.g., dust, oil, or mist.

Note: 3. At standard atmospheric pressure (1013.25 hPa)

Output Characteristics

D6F-PH0025AD1-□

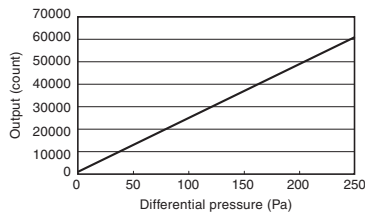


| Differential pressure (Pa) | 0 | 50 | 100 | 150 | 200 | 250 |
|----------------------------|-------------|--------------|--------------|--------------|--------------|--------------|
| Output (HEX) | 1024 (0400) | 13024 (32E0) | 25024 (61C0) | 37024 (90A0) | 49024 (BF80) | 61024 (EE60) |

Measurement conditions: Power supply voltage of 3.3 ± 0.1 VDC, ambient temperature of $25 \pm 5^\circ\text{C}$, and ambient humidity of 35% to 75%.

Differential pressure conversion formula: $Dp = (Op - 1024) / 60000 \times 250$

Dp = Differential pressure, Op = Output

D6F-PH0505AD3-□

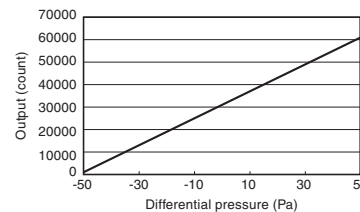


| Differential pressure (Pa) | -50 | -30 | -10 | 0 | 10 | 30 | 50 |
|----------------------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Output (HEX) | 1024 (0400) | 13024 (32E0) | 25024 (61C0) | 31024 (7930) | 37024 (90A0) | 49024 (BF80) | 61024 (EE60) |

Measurement conditions: Power supply voltage of 3.3 ± 0.1 VDC, ambient temperature of $25 \pm 5^\circ\text{C}$, and ambient humidity of 35% to 75%.

Differential pressure conversion formula: $Dp = (Op - 1024) / 60000 \times 100 - 50$

Dp = Differential pressure, Op = Output

D6F-PH5050AD3-□

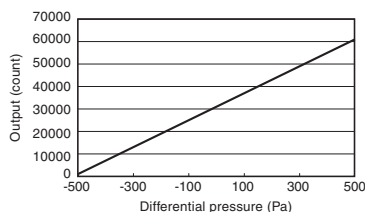

| Differential pressure (Pa) | -500 | -300 | -100 | 0 | 100 | 300 | 500 |
|----------------------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Output (HEX) | 1024 (0400) | 13024 (32E0) | 25024 (61C0) | 31024 (7930) | 37024 (90A0) | 49024 (BF80) | 61024 (EE60) |

Measurement conditions: Power supply voltage of 3.3 ± 0.1 VDC, ambient temperature of $25 \pm 5^\circ\text{C}$, and ambient humidity of 35% to 75%.

Differential pressure conversion formula: $Dp = (Op - 1024) / 60000 \times 1000 - 500$

Dp = Differential pressure, Op = Output

Note. Change of gas density affects the sensor output.
Change of atmospheric pressure is compensated by the following formula.
 $Dpeff = Dp \times (Pstd / Pamb)$
 $Dpeff$: Effective differential pressure
 Dp : Differential pressure of the sensor output
 $Pstd$: Standard atmospheric pressure (1013.25 hPa)
 $Pamb$: Actual ambient atmospheric pressure (hPa)

Characteristics/Performance

| Model | D6F-PH0025AD1-□ | D6F-PH0505AD3-□ | D6F-PH5050AD3-□ |
|------------------------------------------|--------------------------------------------------------------------------------------------------------------|-----------------|-----------------|
| Differential pressure range (See note 1) | 0 to 250 Pa | ±50 Pa | ±500 Pa |
| Calibration Gas (See note 2.) | Air | | |
| Port Type | Bamboo joint, Maximum outside diameter: 4.9 mm, minimum outside diameter: 4.0 mm | | |
| Power Supply | 2.3 to 3.6 VDC | | |
| Current Consumption | 6 mA max. with no load and Vcc of 3.3 VDC, GND = 0 VDC, 25°C | | |
| Resolution | 12 bit | | |
| Zero point tolerance (See note 3.) | ±0.2 Pa | | |
| Span tolerance (See note 3.) | ±3% RD | | |
| Span shift due to temperature variation | < 0.5% RD per 10°C | | |
| Response time | 33 ms typical at 12 bit resolution (50 ms max.) The processing time is 6 ms typical at 12 bit resolution. | | |
| Gas flow through sensor (See note 5.) | 63 mL/min | 23 mL/min | 100 mL/min |
| Interface | I2C | | |
| Case material | PPS | | |
| Degree of Protection | IEC IP40 (Excluding tubing sections.) | | |
| Withstand Pressure | 10 kPa | | |
| Operating temperature (See note 4.) | -20 to +80°C | | |
| Operating humidity (See note 4.) | 35 to 85 %RH | | |
| Storage temperature (See note 4.) | -40 to +80°C | | |
| Storage humidity (See note 4.) | 35 to 85 %RH | | |
| Insulation Resistance | Between Sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC) | | |
| Dielectric Strength | Between Sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) | | |
| Weight | 5.2 g | | |

Note: 1. At standard atmospheric pressure (1013.25 hPa)

Note: 2. Dry gas must not contain large particles, e.g., dust, oil, or mist.


Note: 3. The zero point tolerance and span tolerance are independent uncertainties and add according to the principles of error propagation.

Note: 4. With no condensation or icing.

Note: 5. Type D6F-PH is based on thermal flow principle. Air flow is needed to measure the differential pressure.

Typical characteristic of air flow by differential pressure is below.


Relation between pressure and flow rate

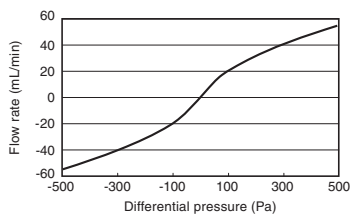



Connections/Dimensions (Unit: mm)



Mounting Direction
Install the Sensor so that the joints are facing upward.

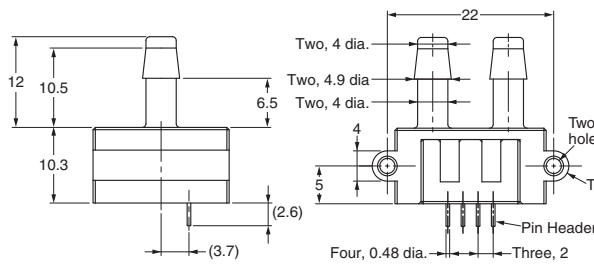

Recommendation size for pin header installation (tolerances: ± 0.1)

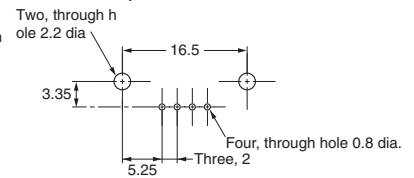


Tubes

Install tubes made of materials such as rubber, urethane or nylon so that they will not come out. For urethane tubes, tubes with an outer diameter of 6 mm and an inner diameter of 4 mm are recommended.

Soldering Conditions

Use a soldering iron for 5 s at 350°C with a pressure of 100 gf max.

Electrical connection

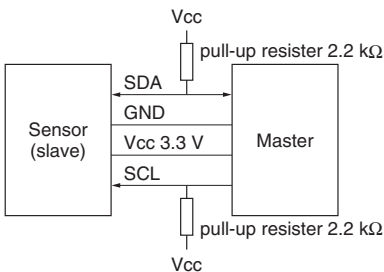

Communication

| | | D6F-PH0025AD1 D6F-PH0505AD3 D6F-PH5050AD3 | D6F-PH0025AD1-1 D6F-PH0505AD3-1 D6F-PH5050AD3-1 | D6F-PH0025AD1-2 D6F-PH0505AD3-2 D6F-PH5050AD3-2 | D6F-PH0025AD1-3 D6F-PH0505AD3-3 D6F-PH5050AD3-3 |
|------------------|------------|-------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|
| Serial Interface | | I2C | | | |
| Master/Slave | HEX | 0x6C | 0x6D | 0x6E | 0x6F |
| | BIN (7bit) | 0b110_1100 | 0b110_1101 | 0b110_1110 | 0b110_1111 |
| Speed mode | | Max. 400kHz (Fast Mode) | | | |
| Signal | SCL | Serial Clock | | | |
| | SDA | Data Signal | | | |

D6F-W

MEMS Flow Sensor

A Compact Sensor That Uses OMRON's Unique Flow Path Structure for High-performance Flow Rate Measurement.

➤ Air ➤ Analog

- Anti-dust performance enhanced by OMRON's unique three-dimensional flow path structure.
- High accuracy of $\pm 5\%$ FS.

RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 40.



Ordering Information

MEMS Flow Sensor

| Applicable fluid | Flow rate range | Model |
|------------------|-----------------|-----------|
| Air | 0 to 1 m/s | D6F-W01A1 |
| | 0 to 4 m/s | D6F-W04A1 |
| | 0 to 10 m/s | D6F-W10A1 |


Accessory (Sold separately)

| Type | Model |
|-------|---------------|
| Cable | D6F-W CABLE |
| | D6F-W CABLE-L |

Note: Refer to *Accessories for the D6F Series* on page 39.

Connections

D6F-W01A1
D6F-W04A1
D6F-W10A1

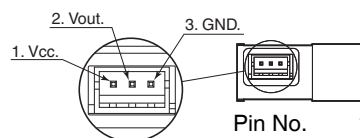

Enlarged View

Pin No. 1: Vcc
2: Vout
3: GND
Connector S3B-ZR-SM2-TF
(made by J.S.T. Mfg. Co.)

Use the following connectors from J.S.T. Mfg. Co. Ltd. to connect the D6F:


Housing: ZHR-3

Contacts: SZH-002T-P0.5
Wires: AWG28 to AWG26
Or


Contacts: SZH-003T-P0.5
Wires: AWG32 to AWG28

Output Voltage Characteristics


D6F-W01A1

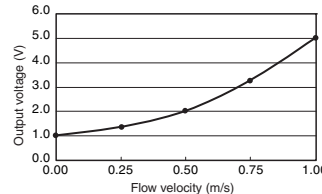

D6F-W04A1

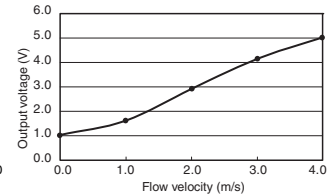

D6F-W10A1

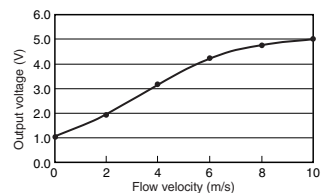

D6F-W01A1


| Flow velocity m/s | 0 | 0.25 | 0.50 | 0.75 | 1.00 |
|-------------------|----------------|----------------|----------------|----------------|----------------|
| Output voltage V | 1.00 \pm 0.2 | 1.35 \pm 0.2 | 2.01 \pm 0.2 | 3.27 \pm 0.2 | 5.00 \pm 0.2 |

D6F-W04A1

| Flow velocity m/s | 0 | 1.0 | 2.0 | 3.0 | 4.0 |
|-------------------|----------------|----------------|----------------|----------------|----------------|
| Output voltage V | 1.00 \pm 0.2 | 1.58 \pm 0.2 | 2.88 \pm 0.2 | 4.11 \pm 0.2 | 5.00 \pm 0.2 |

The flow velocity is the value calculated from the mass flow rate in OMRON's specified 48-mm-dia. wind tunnel. It does not indicate the flow velocity determined by the Measurement Law of Japan. The wind tunnel conditions are shown in Figure 1, below.

Figure 1: Wind Tunnel

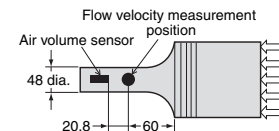


Measurement conditions: Power supply voltage of 12 VDC, ambient temperature of 25°C, and ambient humidity of 35% to 75%.

D6F-W10A1

| Flow velocity m/s | 0 | 2.0 | 4.0 | 6.0 | 8.0 | 10.0 |
|-------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Output voltage V | 1.00 \pm 0.24 | 1.94 \pm 0.24 | 3.23 \pm 0.24 | 4.25 \pm 0.24 | 4.73 \pm 0.24 | 5.00 \pm 0.24 |

The flow velocity is the value calculated from the mass flow rate in OMRON's specified 155-mm-dia. wind tunnel. It does not indicate the flow velocity determined by the Measurement Law of Japan. The wind tunnel conditions are shown in Figure 2, below.

Figure 2: Wind Tunnel

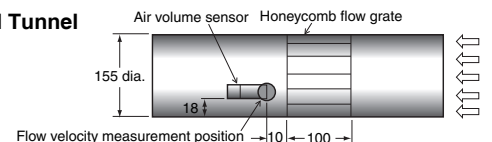

Measurement conditions: Power supply voltage of 12 VDC and ambient temperature of 25°C

Characteristics/Performance

| Model | D6F-W01A1 | D6F-W04A1 | D6F-W10A1 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|------------|------------------------------|
| Flow Range (See note 1.) | 0 to 1 m/s | 0 to 4 m/s | 0 to 10 m/s |
| Calibration Gas (See note 2.) | Air | | |
| Electrical Connection | Three-pin connector | | |
| Power Supply | 10.8 to 26.4 VDC | | |
| Current Consumption | 15 mA max. with no load, with a Vcc of 12 to 24 VDC, and at 25°C | | |
| Output Voltage | 1 to 5 VDC (non-linear output, load resistance of 10 kΩ) | | |
| Accuracy | ±5% FS (25°C characteristic) | | ±6% FS (25°C characteristic) |
| Repeatability (See note 3.) | ±0.4% FS | | |
| Output Voltage (Max.) | 5.7 VDC (Load resistance: 10 kΩ) | | |
| Output Voltage (Min.) | 0 VDC (Load resistance: 10 kΩ) | | |
| Rated Power Supply Voltage | 26.4 VDC | | |
| Rated Output Voltage | 6 VDC | | |
| Case | PPS | | |
| Degree of Protection | IEC IP40 (except for flow inlet and outlet) | | |
| Operating Temperature (See note 4.) | -10 to 60°C | | |
| Operating Humidity (See note 4.) | 35% to 85% | | |
| Storage Temperature (See note 4.) | -40 to 80°C | | |
| Storage Humidity (See note 4.) | 35% to 85% | | |
| Temperature Characteristics | ±5% FS for 25°C characteristic at an ambient temperature of -10 to 60°C | | |
| Insulation Resistance | Between Sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC) | | |
| Dielectric Strength | Between Sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) | | |
| Weight | 6.3 g | | |

Note: 1. Volumetric flow rate at 25°C, 101.3 kPa.

Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.


Dimensions (Unit: mm)

MEMS Flow Sensors

D6F-W01A1

D6F-W04A1

D6F-W10A1

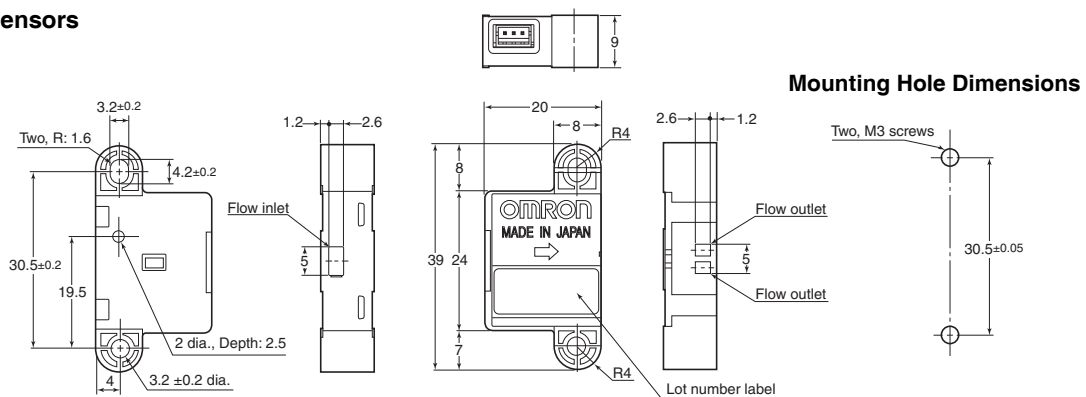

D6F-V

MEMS Flow Sensor

A Compact Sensor That Uses OMRON's Unique Flow Path Structure for High-performance Flow Rate Measurement.

▶ Air ▶ Analog

- Anti-dust performance enhanced by OMRON's unique three-dimensional flow path structure.
- Extremely compact, measuring only 24 × 14 × 8 mm.

RoHS Compliant



Refer to the *Common Precautions for the D6F Series* on page 40.

Ordering Information

MEMS Flow Sensor

| Applicable fluid | Flow velocity range | Model |
|------------------|---------------------|-----------|
| Air | 0 to 3 m/s | D6F-V03A1 |


Accessory (Sold separately)

| Type | Model |
|-------|--------------|
| Cable | D6F-CABLE2 |
| | D6F-CABLE2-L |

Note: Refer to *Accessories for the D6F Series* on page 39.

Connections

D6F-V03A1

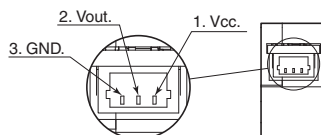


Enlarged View

Pin No. 1: Vcc
2: Vout
3: GND

Connector SM03B-SRSS-TB (made by J.S.T. Mfg. Co.)


Use the following connectors from J.S.T. Mfg. Co. Ltd. to connect the D6F:

- Pressure-welded Connectors
 - Socket: 03SR-3S
 - Wires: AWG30
- Or
- Crimp Connectors
 - Contact: SSH-003T-P0.2
 - Housing: SHR-03V-S
- Wires: AWG32 to AWG28



Output Voltage Characteristics

D6F-V03A1




D6F-V03A1

| Flow velocity m/s | 0 | 0.75 | 1.5 | 2.25 | 3 |
|-------------------|----------|----------|-----------|-----------|--------|
| Output voltage V | 0.5±0.15 | 0.7±0.15 | 1.11±0.15 | 1.58±0.15 | 2±0.15 |

The flow velocity is the value calculated from the mass flow rate in OMRON's specified 48-mm-dia. wind tunnel. It does not indicate the flow velocity determined by the Measurement Law of Japan. The wind tunnel conditions are shown in Figure 1 below.

Figure 1: Wind Tunnel

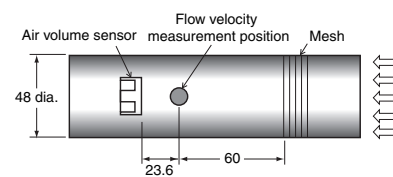

Measurement conditions: Power supply voltage of 3.3 VDC, ambient temperature of 25°C, and dry air.

Characteristics/Performance

| Model | D6F-V03A1 |
|-------------------------------------|--------------------------------------------------------------------------------------------------------------|
| Flow Range (See note 1.) | 0 to 3 m/s |
| Calibration Gas (See note 2.) | Air |
| Electrical Connection | Three-pin connector |
| Power Supply | 3.15 to 3.45 VDC |
| Current Consumption | 15 mA max. with no load, with a Vcc of 3.3 VDC, and at 25°C |
| Output Voltage | 0.5 to 2 VDC (non-linear output, load resistance of 10 kΩ) |
| Accuracy | ±10% FS (25°C characteristic) |
| Repeatability (See note 3.) | ±1.5% FS |
| Output Voltage (Max.) | 2.7 VDC (Load resistance: 10 kΩ) |
| Output Voltage (Min.) | 0 VDC (Load resistance: 10 kΩ) |
| Rated Power Supply Voltage | 12 VDC |
| Rated Output Voltage | 3 VDC |
| Case | PBT |
| Degree of Protection | IEC IP40 (except for flow inlet and outlet) |
| Operating Temperature (See note 4.) | -10 to 60°C |
| Operating Humidity (See note 4.) | 35% to 85% |
| Storage Temperature (See note 4.) | -40 to 80°C |
| Storage Humidity (See note 4.) | 35% to 85% |
| Temperature Characteristics | ±20% FS for 25°C characteristic at an ambient temperature of -10 to 60°C |
| Insulation Resistance | Between Sensor outer cover and lead terminals: 20 MΩ min. (at 500 VDC) |
| Dielectric Strength | Between Sensor outer cover and lead terminals: 500 VAC, 50/60 Hz min. for 1 min (leakage current: 1 mA max.) |
| Weight | 5.3 g |

Note: 1. Volumetric flow rate at 25°C, 101.3 kPa.

Note: 2. Dry gas. (must not contain large particles, e.g., dust, oil, or mist.)

Note: 3. Reference (typical)

Note: 4. With no condensation or icing.

Dimensions (Unit: mm)

MEMS Flow Sensors

D6F-V03A1



D6F-D

MEMS 2-Axis Flow Sensor

  Digital

Save energy with airflow sensing. Optimize air conditioning control without sacrificing quality.

- Two-axis sensing to detect not only the airflow speed but also the airflow direction.
- Link up to 32 Sensors to achieve visualization over a wide range.
- Compact package for greater installation flexibility.



RoHS Compliant



Refer to the *Safety Precautions* on page 38 and *Common Precautions for the D6F Series* on page 40.

Ordering Information

| Applicable Medium | Flow Range | Model |
|-------------------|---------------------|-----------------------|
| Air (See note.) | $\pm 1.0\text{m/s}$ | D6F-D010A32-00 |

Note: Dry gas must not contain large particles, eg dust, oil, mist.

Characteristics/Performance

Characteristics

| Item | Rating |
|-----------------------|-------------------------------------------------|
| Power-supply Voltage | 4.5 to 5.5 VDC |
| Storage Temperature | -10 to 55°C (without freezing and condensation) |
| Operating Temperature | 0 to 40°C |
| Storage Humidity | 30 to 85% |
| Operating Humidity | 30 to 80% |

Note: With no condensation or icing.

Performance

| Item | Characteristic | |
|----------------|----------------|----------------------------------|
| Flow Velocity | Range | $\pm 1.0\text{m/s}$ in each axis |
| | Accuracy | $\pm 3\%$ F.S. in each axis |
| Flow Direction | Range | 0 to 360° |
| | Accuracy | $\pm 15^\circ$ (at 0.3m/s) |

Note: 1. Flow velocity is determined by our standard wind tunnel (300 mm square), and this does not indicate the flow velocity specified in Measurement law. (Fig.1 shows our standard wind tunnel)

Fig. 1. Wind Tunnel



Connection

Fig. 2. Block Diagram



The sensor has two port of RJ-45 connectors (8 pins), and all the pair of each pin is connected internally. These connectors can be used for daisy chain wiring when using multiple devices on the same bus (multi-drop connection).


The standard CAT5e straight LAN cable can be used for the electrical connection.

Interface

| Item | Specifications |
|----------------------|---------------------------------------------------------------------------------------------------------------------|
| Interface | RS-485 |
| Wire Connection | Multi-drop connection with daisy chain wiring (32 devices max.) |
| Communication system | 2 wires : Half duplex |
| Baud rate | 9600bps or 38400bps : DIP switch* selectable |
| Protocol | Modbus-RTU |
| Transmission code | Binary |
| Data length | 8 bit |
| Stop bit | 1 bit |
| Parity | None |
| Response time | 250 ms max. |
| Command interval | 10 ms min. (Minimum wait time after receiving the response from the device to the consecutive command transmission) |
| Slave address | 1 to 32 (0x01 to 0x20) : DIP switch* selectable |
| Termination resistor | Built-in termination resistor : DIP switch* selectable |

* The communication settings of this device can be set by DIP switch configuration as shown in Fig. 3. All bits are switched off before shipment.

Fig. 3. DIP Switches

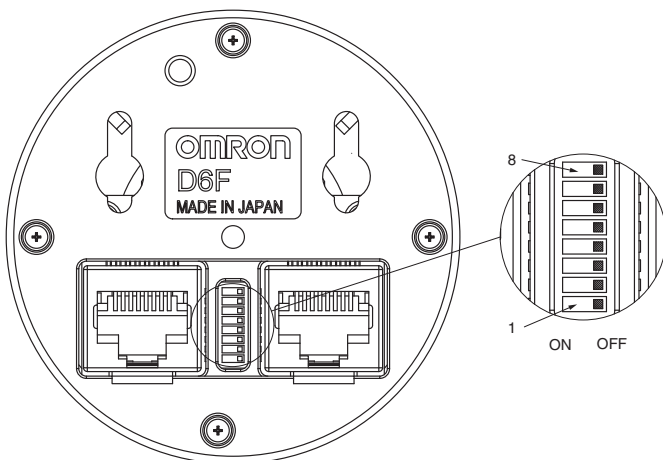


| Circuits | Function | ON | OFF |
|----------|-------------------------------|----------|---------|
| 8 | Built-in termination resistor | Enable | Disable |
| 7 | Baud rate | 38400bps | 9600bps |
| 6 | None | - | - |
| 5 | Slave Address : bit 4 | 1 | 0 |
| 4 | Slave Address : bit 3 | 1 | 0 |
| 3 | Slave Address : bit 2 | 1 | 0 |
| 2 | Slave Address : bit 1 | 1 | 0 |
| 1 | Slave Address : bit 0 | 1 | 0 |

Note: Slave address of the device = 1 + (5 bit of integer consisting of circuit number 1 to 5).


Fig. 4. Connection Example to Link Three Sensors

Fig. 4 shows an example of multi-drop connection when connecting three devices on the same bus. In this case, slave address, baud rate and built-in termination resistor of each device must be set properly.

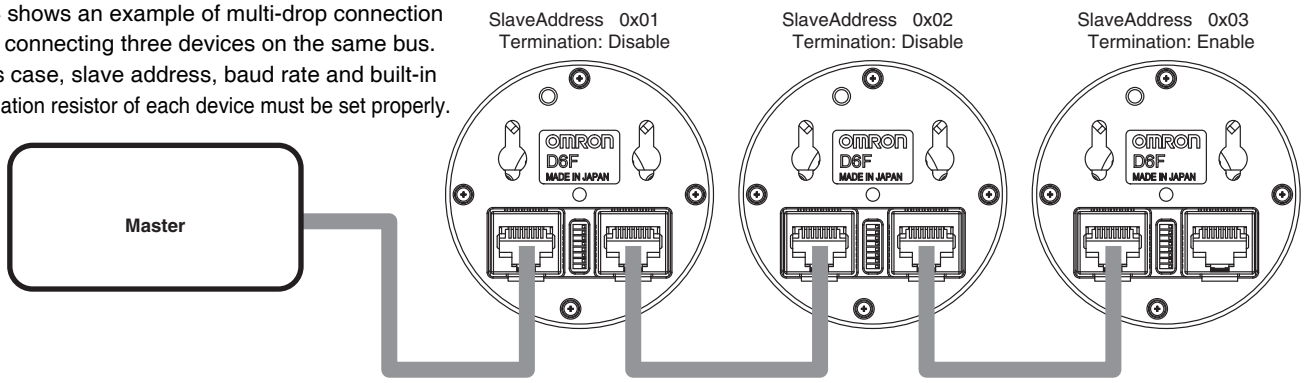

Dimensions (Unit: mm)

D6F-D010A32-00

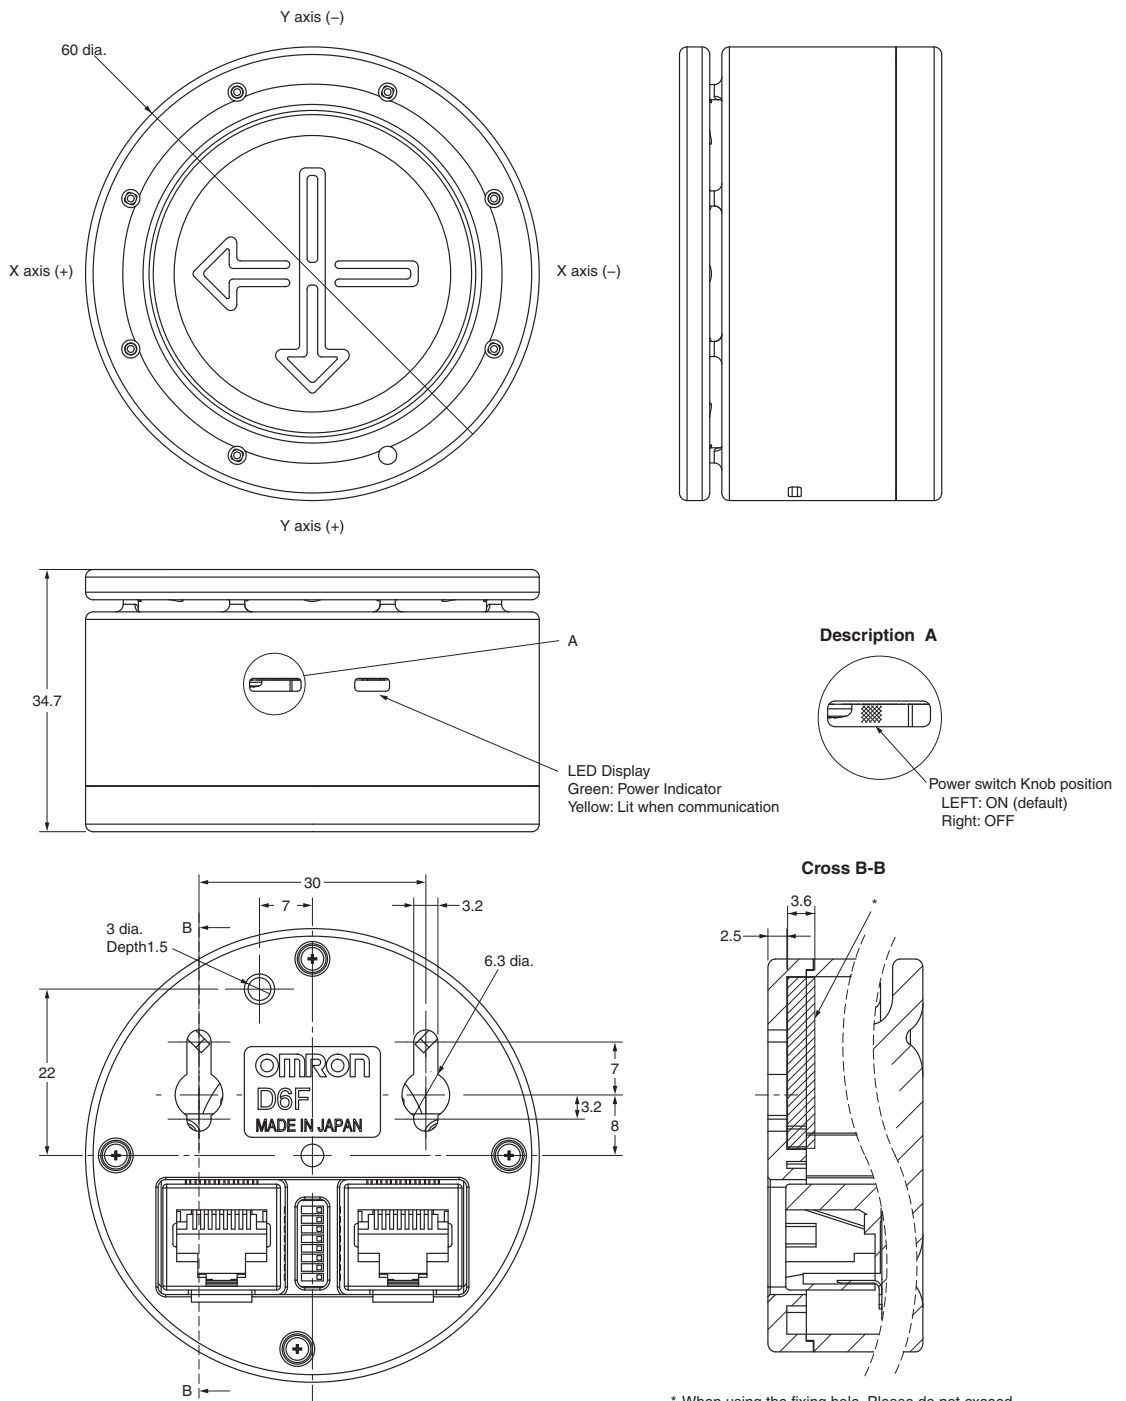

* When using the fixing hole, Please do not exceed the depth (3.6 mm) of the shaded portion.

Safety Precautions

Caution

The sensor is a precision device, and if large shock and load is applied, it may cause a failure or characteristic change. Please do not use the sensor which is added excessive shock to the terminals, discompose the cover, or has fallen.

Precautions for Correct Use

● Applicable medium and Device mounting

- Depending on the mounting position and the ambient environment, the foreign object such as dust can adhere to the inside of the device and can cause clogging of the part of flow path. As a result, the device may not perform as intended. And, the characteristic specified in this document may not be maintained. Please use the device after enough ex-ante evaluation under the condition of actual use in order to confirm the performance and safety in the application.

- For the gasses other than the applicable medium, please use the device in your responsibility after the confirmation of its performance and safety.

However, do not use in the presence of inflammable gases, such as hydrogen, methane, ethane, and a liquefied petroleum gas. In addition, do not use with corrosive gases (such as chlorine, sulfur, acid, alkali, ammonia etc.)

- The direction of the arrow on top of the body shows the positive direction of the device output in each axis. Please install the device in a correct direction corresponding to the direction of the flow. With the wrong installation, the device cannot measure flow direction correctly.
- After installation, the device may not perform as intended by the presence of a flow obstacle around the device.
- After Installation, the device operation and its performance should be checked before actual use in the application.
- Horizontal device orientation (top cover side up) is recommended. If the device orientation is not horizontal, the output may shift as an offset more than $+3\%$ F.S.. For more details of offset compensation features, please refer to the communication specification.
- The device may not operate properly, if a foreign object or a flow obstacle is placed around the entrance of the flow path.

● Use environment

Please do not use the device in the following environments:

- Places where the device directly receives radiant heat from an apparatus.
- Places where the device is exposed to water, salt water, water droplets and oil splash.
- Places where the device is exposed to direct sunlight.
- Places with volatile gas, inflammable gas or corrosive gas (such as chlorine, sulfur, acid, alkali, ammonia etc.)
- Places where frequent temperature changes.
- Places where dusty condition.
- Places with the possibility of freezing and dew condensation.
- Places where the device receives large magnitudes of vibration and shock.

- Places where the device receives strong electric field effect or magnetic field effect.

● Noise Countermeasures

- Please check electrical noise condition before actual use. The device may not perform as intended by the effect from electrical noise.
- The voltage input that exceeds absolute maximum ratings must not be applied. This can damage the electrical circuit of the device. Place the protection circuit as needed, so that the voltage to the lines will not exceed absolute maximum ratings.
- Take particular care to install away from AC power transformers, live mains power lines and high power magnetic circuits.
- The device may not operate properly where the place with the equipment that generates strong high-frequency wave or surge.
- Please attach surge absorber or noise filter to the peripheral equipment that generates noise.
- In order to prevent inductive noise, wiring of the device must be separated from the power line with the high voltage and large current.
- When using with a switching regulator or DC-DC convertor, switching noise may affect the device operation.

● Handling

- Please handle with countermeasure against static electricity.
- Do not make a direct solder connection to the integral terminals; this may result in damage, and possibly cause failure. It is recommended to use the standard straight CAT5e LAN cable and to ensure correct connection.
- Do not mix up the wiring. This can damage the device and cause the failure.
- Power must be supplied from the single source. And, do not apply different voltage to the device from each connector. This may damage the device and also the host equipment (master).
- After wiring cables, please do not apply excessive pulling force to the connector. Tensile force of 12N or more can cause the failure.
- Changing DIP switch setting must be done when in power off state.

● Communication


- When using the multiple devices on the same bus, please make sure that there is no device that has the same slave address, please refer to the communication specification (No.MDPE-12-0146).
- When using built-in termination resistor, please enable it only to one device at the end of the bus.
- Please make sure that there are no multiple devices with termination resistors enabled.
- Please make sure that baud rate setting must be same for the host equipment (master) on the same bus.

Accessories for the D6F Series

Dimensions (Unit: mm)

● Cable (Sold separately)

D6F-CABLE1

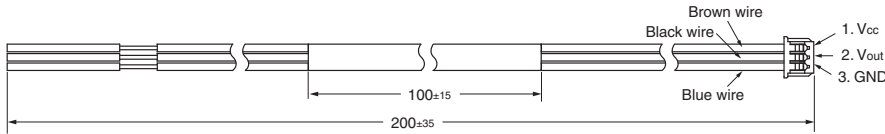


Connector :51021 (Manufactured by Molex, LLC)
Terminal :50079 (Manufactured by Molex, LLC)
Wire :.014SQ

D6F-CABLE2




Contact :SSH-003T-P0.2 (Manufactured by J.S.T. Mfg. Co., Ltd.)
Housing :SHR-03V-S (Manufactured by J.S.T. Mfg. Co., Ltd.)
Wire :AWG#30

D6F-CABLE2-L

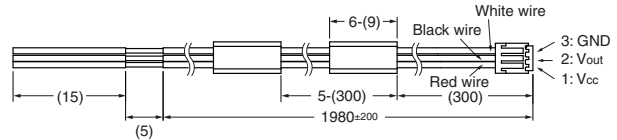

Contact :SSH-003T-P0.2 (Manufactured by J.S.T. Mfg. Co., Ltd.)
Housing :SHR-03V-S (Manufactured by J.S.T. Mfg. Co., Ltd.)
Wire :AWG#30

D6F-CABLE3

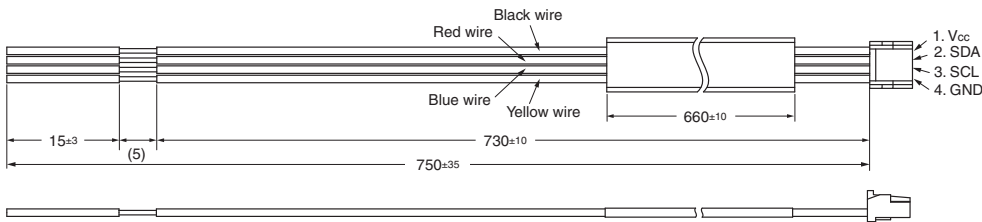


Contact :SSHL-002T-P0.2 (Manufactured by J.S.T. Mfg. Co., Ltd.)
Housing :GHR-04V-S (Manufactured by J.S.T. Mfg. Co., Ltd.)
Wire :AWG#28

D6F-W CABLE



Contact :SZH-002T-P0.5 (Manufactured by J.S.T. Mfg. Co., Ltd.)
Housing :ZHR-3 (Manufactured by J.S.T. Mfg. Co., Ltd.)
Wire :AWG#26


D6F-W CABLE-L

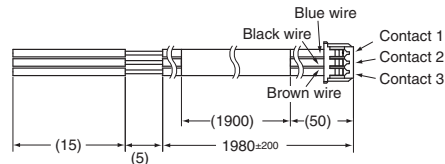

Contact :SZH-002T-P0.5 (Manufactured by J.S.T. Mfg. Co., Ltd.)
Housing :ZHR-3 (Manufactured by J.S.T. Mfg. Co., Ltd.)
Wire :AWG#26


● Quick fastener (Sold separately)

D6F-FASTENER-P10

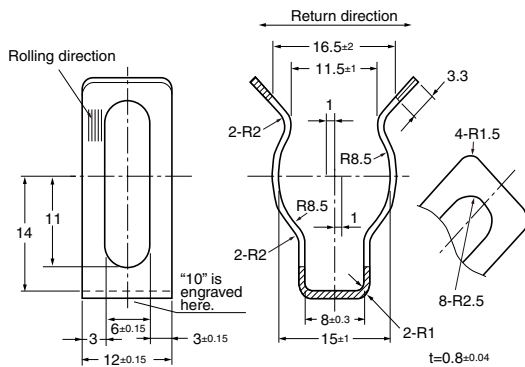

● Pipe fittings (Sold separately)

D6F-PLG1

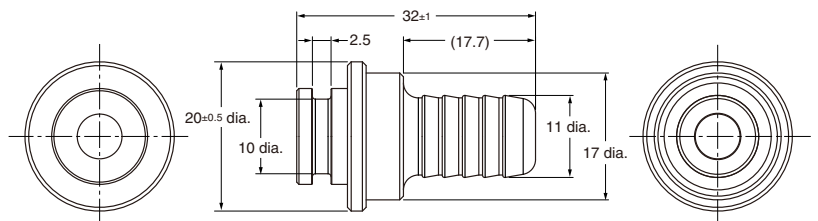

Common Precautions for the D6F Series

Safety Precautions

Precautions for Correct Use

● Sensor Applications

The D6F is built for use with general-purpose devices. In particular, when using the D6F for applications with the safety requirements described below, take steps to ensure system and device safety through measures such as fail-safe designs, redundant designs, and regular inspections.

- Safety devices for ensuring safety for persons
- Transportation equipment control (such as applications to stop operation)
- Aviation and space equipment
- Nuclear power equipment

Do not use the D6F for applications in which D6F operation would directly affect human life.

● Fluids, Pipe Mounting and Sensor Installation

All D6F Models

- (1) Use clean fluids. Install a filter or mist separator on the inflow pipe. Failure to do so may result in malfunction or changes in characteristics due to dust or mist. This does not apply to the D6F-W, D6F-V, D6F-P and D6F-PH.
- (2) Do not use corrosive gases other than the specified applicable fluids (such as chlorine, sulfur, acid, or alkali). Doing so may cause product failure.
- (3) The specified performance may not be obtained if the D6F is used for fluids other than the specified applicable fluids.
- (4) After removing the Sensor from the package, do not allow foreign particles to enter the piping. Foreign particles in the piping may cause product failure.
- (5) Install the Sensor so that the fluid flows in the direction indicated by the arrow on the Sensor. Correct measurements cannot be obtained if the fluid flows in the wrong direction. This does not apply to the D6F-V, D6F-P and D6F-PH.
- (6) It is recommended that the Sensor (except for the D6F-A3) be mounted horizontally. If it is not mounted horizontally, an error of $\pm 1\%$ FS or higher may result.
- (7) Install the Sensor on a flat surface. Incorrect installation may damage the Sensor and make it impossible to obtain correct measurements.
- (8) Make sure that the power to all equipment is turned OFF before you install the Sensor. Installing the Sensor while the power supply is ON may result in electrical shock or abnormal operation.
- (9) Always check operation after installation.
- (10) Do not drop the Sensor or disassemble the cover.

D6F-A1

- (1) Make sure that pipes with bamboo joints are airtight. Correct measurements cannot be obtained if there is leakage from joints.
- (2) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.

D6F-N2/-L2

- (1) Use the Rc 1/4 tapped threads for the pipes, and tighten the threads to a maximum torque of 5 N•m. Tightening beyond this value may result in fractures, which can cause leaks. Apply a suitable amount of pipe sealer. Do not apply sealer on the first two threads from the end of the threaded section. When you tighten the pipes, do not allow foreign matter or oil on the joint area.
- (2) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.


D6F-A3

- (1) When installing the pipes, use M5 screws for the joints and tighten to a torque of 1.5 N•m maximum. Use sealing tape to make the joints airtight. Incorrect installation may make it impossible to obtain correct measurements.
- (2) It is recommended that the Sensor be mounted either horizontally or vertically. Mounting the Sensor at an angle may make it impossible to obtain correct measurements.
- (3) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.

D6F-A5

- (1) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.
- (2) Install O-rings to seal the fluid inlet and outlet points. The recommended O-ring is JIS B 2401, nominal number P5.

Installation Example

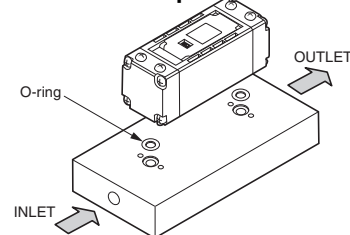

D6F-A6

- (1) Use the appropriate threads (R1/4, NPT1/8 or NPT1/2) for the pipes, and tighten the pipes to a maximum torque of 5 N•m. Tightening beyond this value may result in fractures, which can cause leaks. When you tighten the pipes, do not allow foreign matter or oil on the joint area. Use a spanner or adjustable wrench to turn the connecting section (aluminum alloy) and connect the pipe. Do not place the spanner or wrench on the Sensor (PPS). Doing so may damage the Sensor or result in leaks. Apply a suitable amount of pipe sealer. Do not apply sealer on the first two threads from the end of the threaded section. When you tighten the pipes, do not allow foreign matter or oil on the joint area.
- (2) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.


Common Precautions for the D6F Series

D6F-A7/-L7/-N7/-A7D/-AB71/-AB71D


- (1) Use male quick couplings for the piping, and secure them with the applicable quick fasteners.
- (2) Do not apply excessive force to the adapter section when connecting the pipes. If strong force is applied to the connected pipes, or if strong force is applied directly to the adapter section while holding the Sensor, it may damage the Sensor or cause leakage.

Installation Example

Use male, P10-type quick-connect joints for the D6F-A7/-L7/-N7/-A7D and P14-type quick-connect joints for the D6F-AB71/-AB71D.

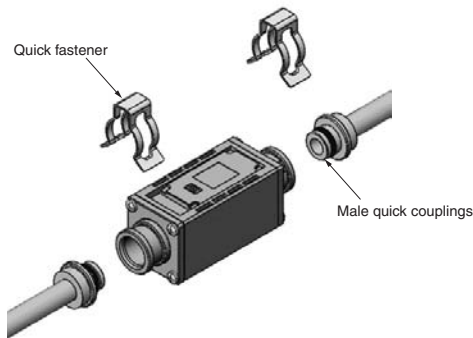

Applicable male quick coupling dimensions (Unit: mm)

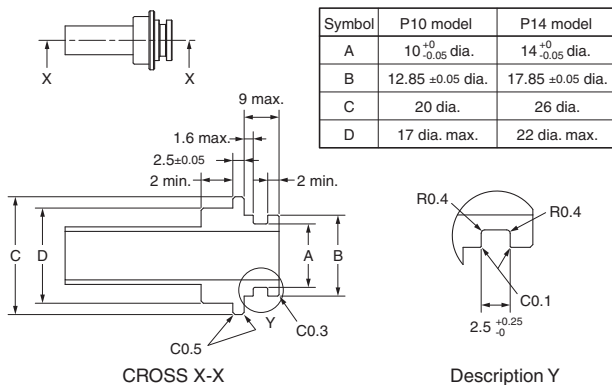

Note. There is a possibility that leak damage or faulty of the body occurs when static load of more than 40 N is applied to 300 mm from the center of product as fulcrum point.


D6F-P0001A1/-P0010A1/-P0010A2

- (1) Depending on the ambient environment and installation location, dust, dirt, and other foreign matter may come in inside the Sensor and block a part or all of the flow path or accumulate on internal components. This may result in the Sensor not being able to perform to the specifications given above. Always perform a pre-evaluation on your actual equipment and be aware of the possible problems that may occur before you use the Sensor with the actual equipment.
- (2) Attach all tubes so that the fluid flows only in the direction from the positive side (+) to the negative side (-). Refer to the figure on page 26 for the installation direction.
- (3) For PCB-mounting Sensors, perform terminal soldering only after the Sensor is secured into place on the PCB. Use a soldering iron for 5 s at 350°C with a pressure of 100 gf max. (This applies only to PCB-mounting Sensors.)
- (4) Use M2.6 panhead screws or equivalent tapping screws to mount the Sensor, and tighten the screws to a maximum torque of 0.59 N•m.

D6F-P0010AM2

- (1) Depending on the ambient environment and installation location, dust, dirt, and other foreign matter may come in inside the Sensor and block a part or all of the flow path or accumulate on internal components. This may result in the Sensor not being able to perform to the specifications given above. Always perform a pre-evaluation on your actual equipment and be aware of the possible problems that may occur before you use the Sensor with the actual equipment.
- (2) Attach all tubes so that the fluid flows only in the direction from the positive side (+) to the negative side (-). Install the Sensor with the manifold facing downward. Refer to the figure on page 26 for the installation direction.
- (3) Use M3 panhead screws or equivalent tapping screws to mount the Sensor, and tighten the screws to a maximum torque of 0.59 N•m.
- (4) Install O-rings to seal the fluid inlet and outlet points. The recommended O-ring is JIS B 2401, nominal number P4.

Installation Example

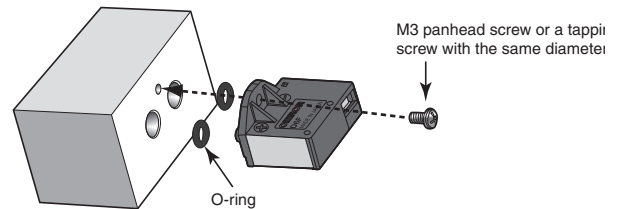

D6F-PH

- (1) Depending on the ambient environment and installation location, dust, dirt, and other foreign matter may come in inside the Sensor and block a part or all of the flow path or accumulate on internal components. This may result in the Sensor not being able to perform to the specifications given above. Always perform a pre-evaluation on your actual equipment and be aware of the possible problems that may occur before you use the Sensor with the actual equipment.
- (2) Attach all tubes so that the fluid flows only in the direction from the high pressure side (+) to the low pressure side (-).
- (3) Use M1.8 panhead screws or equivalent tapping screws to mount the Sensor, and tighten the screws to a maximum torque of 0.36 N•m.
- (4) The sensor output is affected with the length of a tube. The error is less than 1% with a tube (ID:4mm) length up to 800mm.
- (5) Connection
 - Wire with the correct terminal names and polarities. Incorrect wiring will cause failure of internal components.
 - Do not use flow soldering.
 - Please solder after fixed on the circuit board by screw.
 - Use a soldering iron:
 - Soldering condition Pressure Max.100gf
 - Temperature 350 degree C
 - Time Max. 5s

Common Precautions for the D6F Series


D6F-W

- (1) Depending on the ambient environment and installation location, dust, dirt, and other foreign matter may come in inside the Sensor and block a part or all of the flow path or accumulate on internal components. This may result in the Sensor not being able to perform to the specifications given above. Always perform a pre-evaluation on your actual equipment and be aware of the possible problems that may occur before you use the Sensor with the actual equipment.
- (2) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.

D6F-V

- (1) Depending on the ambient environment and installation location, dust, dirt, and other foreign matter may come in inside the Sensor and block a part or all of the flow path or accumulate on internal components. This may result in the Sensor not being able to perform to the specifications given above. Always perform a pre-evaluation on your actual equipment and be aware of the possible problems that may occur before you use the Sensor with the actual equipment.
- (2) Use M3 panhead screws to install the Sensor, and tighten them to a maximum torque of 0.59 N•m.
- (3) This Sensor does not contain any protective circuits. Never allow the electrical load to exceed the maximum ratings. Doing so may damage the circuits. Install protective circuits if required.
- (4) Mount the Sensor so that the flow inlet side (the side with the logo) is perpendicular to the windward side and ensure that the flow inlet and flow outlet are not blocked in any way. If the Sensor is not mounted correctly, accurate measurements cannot be made.

Installation Example



● Operating Environment

Do not use the Sensor in the following locations:

- Locations directly subject to heat radiated from heating equipment
- Locations subject to water or oil
- Locations subject to direct sunlight
- Locations subject to intense temperature changes
- Locations subject to icing or condensation
- Locations subject to excessive vibration or shock

● Countermeasures against Noise

Noise may make it impossible to obtain correct measurements. Consider the following countermeasures.

- Allow as much space as possible between the Sensor and devices that generates high frequencies (such as high-frequency welders and high-frequency sewing machines) or surges.
- Attach surge absorbers or noise filters to noise-generating devices that are near the Sensor (in particular, equipment with inductance, such as motors, transformers, solenoids, and magnetic coils).
(It also helps to separate pipes and ducts, and to use shielded cables.)

● Power Supply

- Force of connector terminal is 20 N max. Do not add strength more than tension of wire bending to connector at wiring. Install the connector coaxially to the fitting axis with holding all wires. And pulling angle should be within 15 degrees.
- Use the applicable connectors. Directly soldering the connection terminals will cause product failure. (except for the D6F-PH)
- Check the terminal names and polarity and wire the power supply correctly. Incorrect wiring will cause failure of internal components.
- When using a commercially available switching regulator, ground the FG (frame ground) and G (ground) terminals.

● Handling

The sensor is a precision device, and if large shock and load is applied, it may cause a failure or characteristic change. Please do not use the sensor which is added excessive shock to the terminals, discompose the cover, or has fallen.

- The sensor shall only be handled in electrostatic discharge protected areas (EPA) under protected and controlled conditions

RoHS Directive

The RoHS mark is displayed on the packing of products for which the six substances banned by the RoHS Directive have been abolished (both in processing and in the electronic components mounted to the PCBs).

* RoHS marking may be terminated if it is later determined that parts that were previously treated as RoHS compliant are not compliant due to circumstances at the supplier of the parts.

● RoHS Compliance Criteria

The following standards are used to determine RoHS compliance for the six banned substances.

(Items to which the RoHS Directive is not applicable are not given.)

- Lead: 1,000 ppm max.
- Hexavalent chromium: 1,000 ppm max.
- Mercury: 1,000 ppm max.
- PBB: 1,000 ppm max.
- Cadmium: 100 ppm max.
- PBDE: 1,000 ppm max.

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

Please check each region's Terms & Conditions by region website.

OMRON Corporation

Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[D6F-05N2-000](#) [D6F-10A5-000](#) [D6F-20A5-000](#) [D6F-50A5-000](#) [D6F-10A6-000](#) [D6F-20A6-000](#) [D6F-01N2-000](#) [D6F-02L2-000](#) [D6F-P0010A2](#) [D6F-P0010A1](#) [D6F-P0010AM2](#) [D6F-V03A1](#) [D6F-20A61-000](#) [D6F-50A6-000](#) [D6F-02L7-000](#) [D6F-05N7-000](#) [D6F-10A61-000](#) [D6F-P0001A1](#) [D6F-70AB71D-000-0](#) [D6F-CABLE3](#) [D6FZ-FGT200](#) [D6FZ-JD10A](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.