




**NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED**



**THIS PAGE INTENTIONALLY LEFT BLANK**

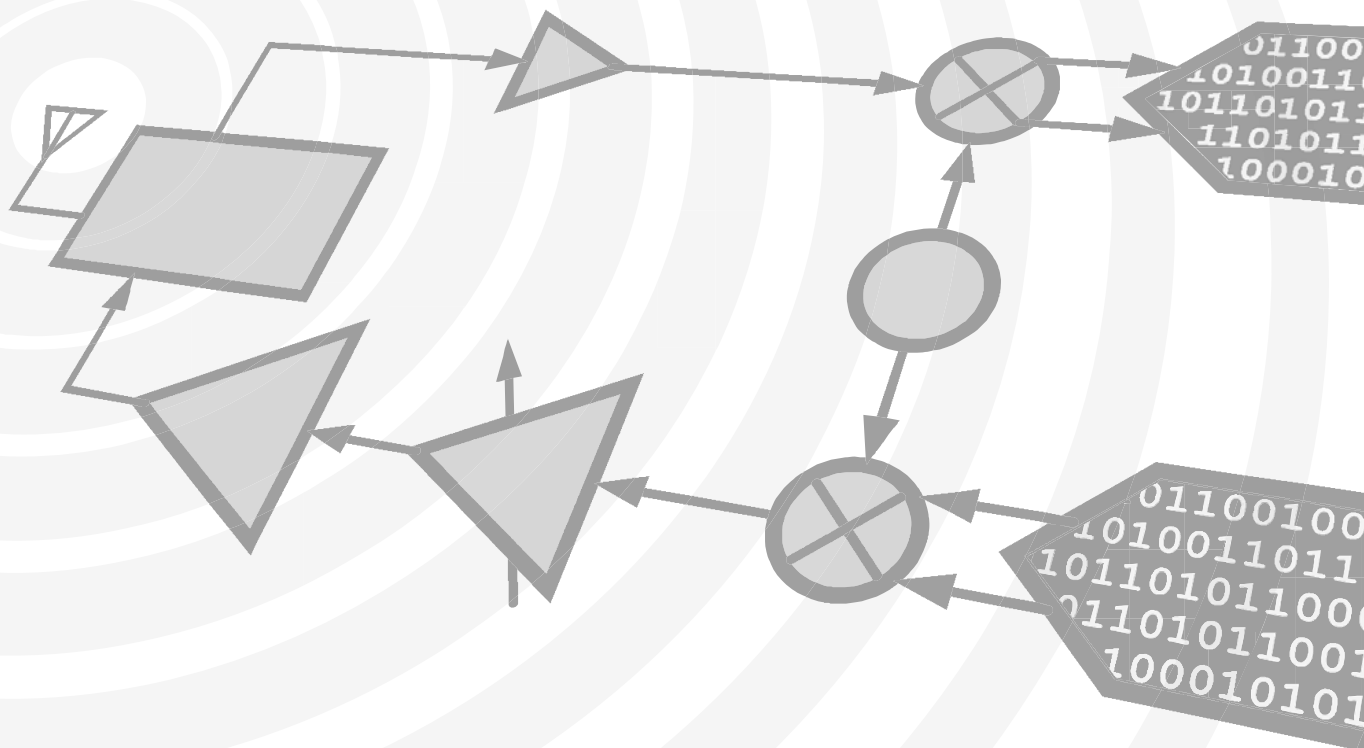

MICROWAVE CORPORATION v04.0514



# HMC773LC3B

## GaAs MMIC FUNDAMENTAL MIXER, 6 - 26 GHz

### Typical Applications

The HMC773LC3B is ideal for:

- Point-to-Point Radios
- Point-to-Multi-Point Radios & VSAT
- Test Equipment & Sensors
- Military End-Use

### Features

Passive: No DC Bias Required


Input IP3: +22 dBm

LO/RF Isolation: 38 dB

Wide IF Bandwidth: DC - 8 GHz

12 Lead Ceramic 3x3 mm SMT Package: 9mm<sup>2</sup>

### Functional Diagram

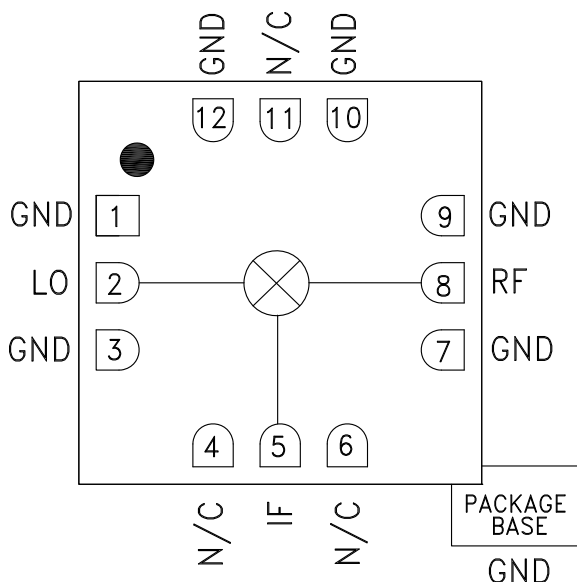

### General Description

The HMC773LC3B is a general purpose double balanced mixer in a leadless RoHS compliant SMT package that can be used as an upconverter or downconverter between 6 and 26 GHz. This mixer requires no external components or matching circuitry. The HMC773LC3B provides excellent LO to RF and LO to IF suppression due to optimized balun structures. The mixer operates with LO drive levels above +13 dBm. The HMC773LC3B eliminates the need for wire bonding, allowing use of surface mount manufacturing techniques.

### Electrical Specifications, $T_A = +25^\circ \text{C}$ , IF = 0.5 GHz, LO = +13 dBm\*

| Parameter                     | Min. | Typ.   | Max. | Min.    | Typ. | Max. | Units |
|-------------------------------|------|--------|------|---------|------|------|-------|
| Frequency Range, RF & LO      |      | 6 - 16 |      | 16 - 26 |      |      | GHz   |
| Frequency Range, IF           |      | DC - 8 |      | DC - 8  |      |      | GHz   |
| Conversion Loss               |      | 9      | 12   |         | 9    | 11   | dB    |
| LO to RF Isolation            |      | 37     |      |         | 39   |      | dB    |
| LO to IF Isolation            | 31   | 37     |      | 21      | 32   |      | dB    |
| RF to IF Isolation            | 5    | 11     |      | 10      | 20   |      | dB    |
| IP3 (Input)                   |      | 17     |      |         | 22   |      | dBm   |
| IP2 (Input)                   |      | 45     |      |         | 50   |      | dBm   |
| 1 dB Gain Compression (Input) |      | 10     |      |         | 11   |      | dBm   |


\* Unless otherwise noted, all measurements performed as downconverter, IF = 0.5 GHz

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824


Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)


**Conversion Gain vs. Temperature**

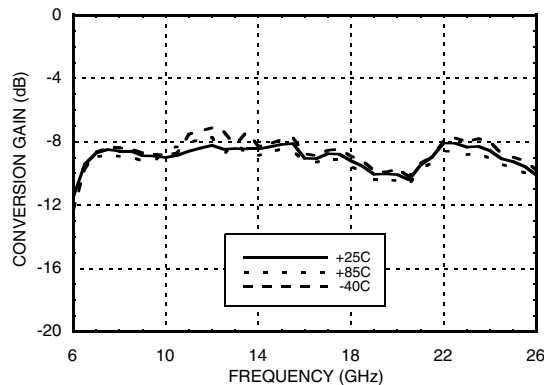


**Isolation**

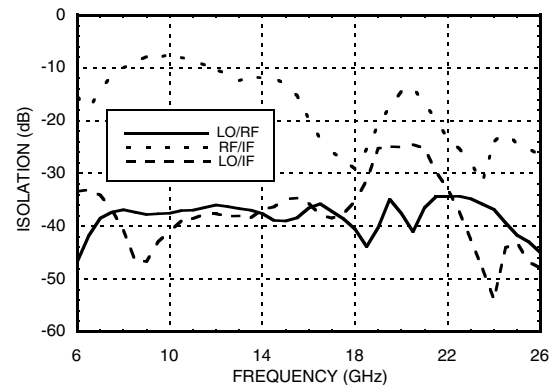


**Conversion Gain vs. LO Drive**

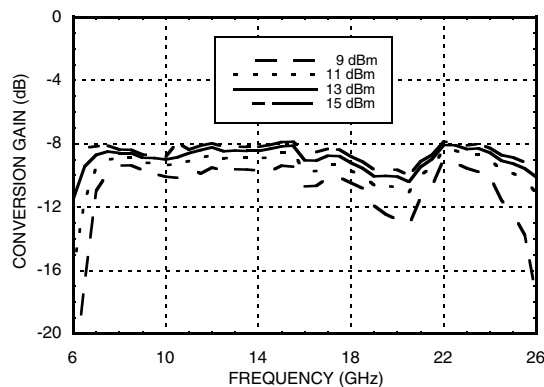


**Return Loss**

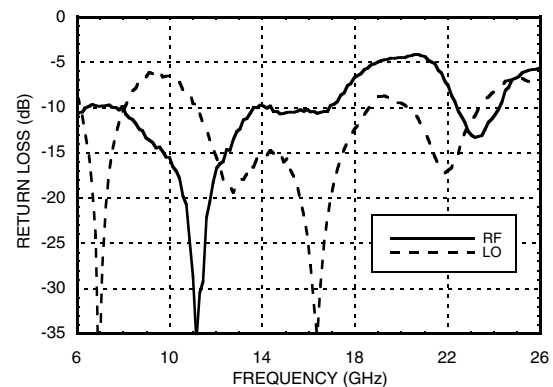

**IF Bandwidth**

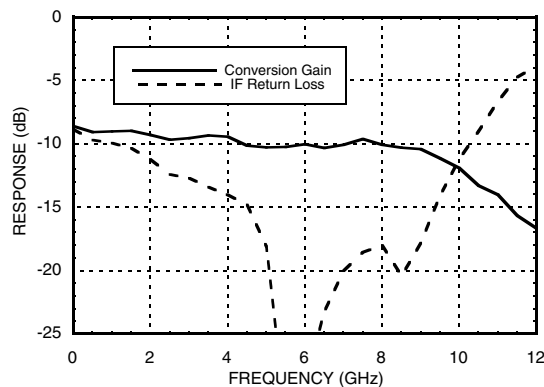

**Upconverter Performance  
Conversion Gain vs. LO Drive**

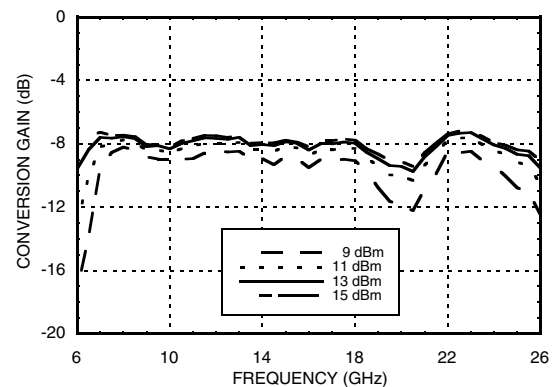




MICROWAVE CORPORATION v04.0514




# HMC773LC3B

## GaAs MMIC FUNDAMENTAL MIXER, 6 - 26 GHz


**Input IP3 vs. LO Drive \***

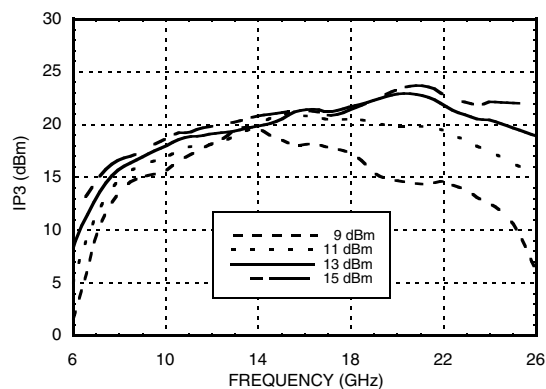


**Input IP3 vs. Temperature\***

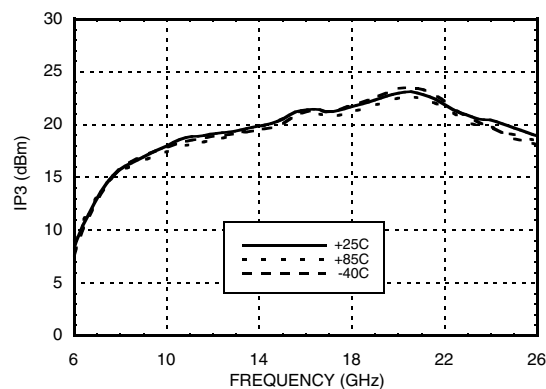


**Input IP2 vs. LO Drive \***

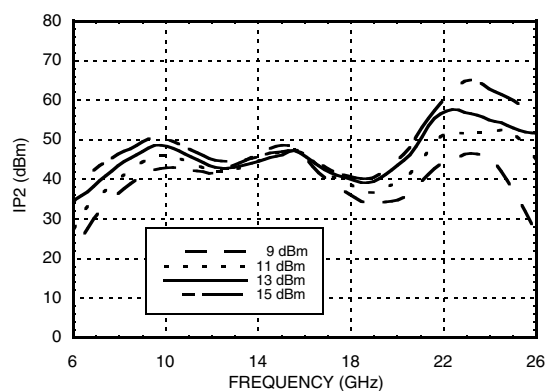


**Input IP2 vs. Temperature \***

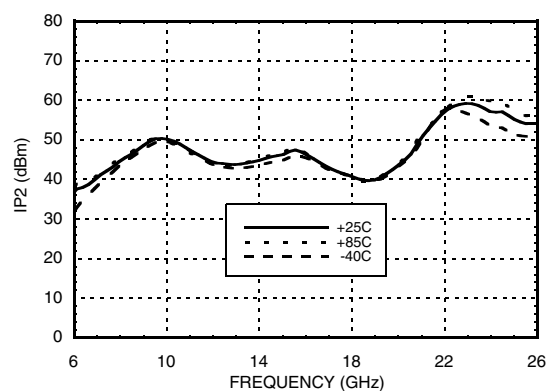

**Input P1dB vs. LO Drive**

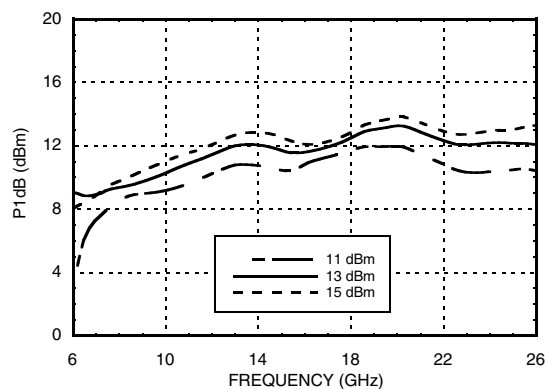

**Input P1dB vs. Temperature**

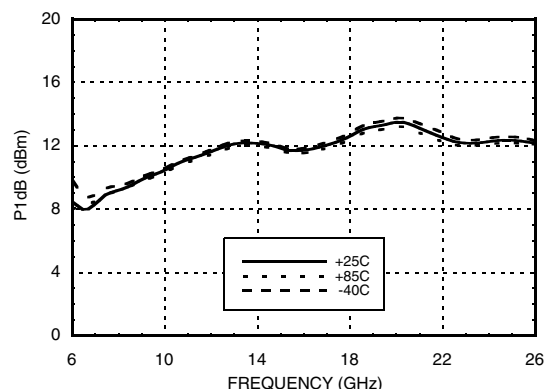

\* Two-tone input power = -5 dBm each tone, 1 MHz spacing.

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824  
Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)  
Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)

### MxN Spurious Outputs

|     | nLO  |      |      |      |      |
|-----|------|------|------|------|------|
| mRF | 0    | 1    | 2    | 3    | 4    |
| 0   | XX   | 14.5 | 30.3 | 31.3 | 53.3 |
| 1   | 0    | 0    | 21.6 | 22.5 | 46.7 |
| 2   | 69.0 | 61.7 | 62.5 | 63.7 | 74.6 |
| 3   | >100 | 79.4 | 65.8 | 68.2 | 59.6 |

RF = 9 GHz @ -10 dBm  
LO = 8 GHz @ +13 dBm  
All values in dBc below the IF output power level.


### Absolute Maximum Ratings

|                                                                 |                |
|-----------------------------------------------------------------|----------------|
| RF / IF Input                                                   | +21 dBm        |
| LO Drive                                                        | +21 dBm        |
| Channel Temperature                                             | 150 °C         |
| Continuous Pdiss (Ta = 85 °C)<br>(derate 3.3 mW/°C above 85 °C) | 210 mW         |
| Thermal Resistance<br>(junction to ground paddle)               | 170 °C/W       |
| Storage Temperature                                             | -65 to +150 °C |
| Operating Temperature                                           | -40 to +85 °C  |




ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

### Outline Drawing

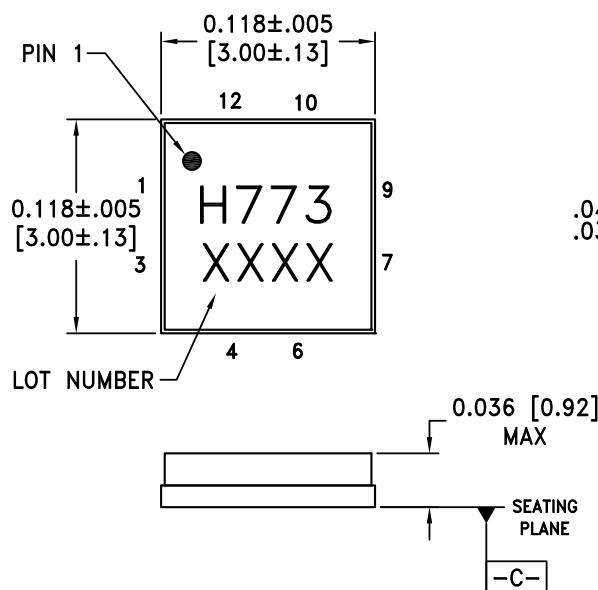

### BOTTOM VIEW

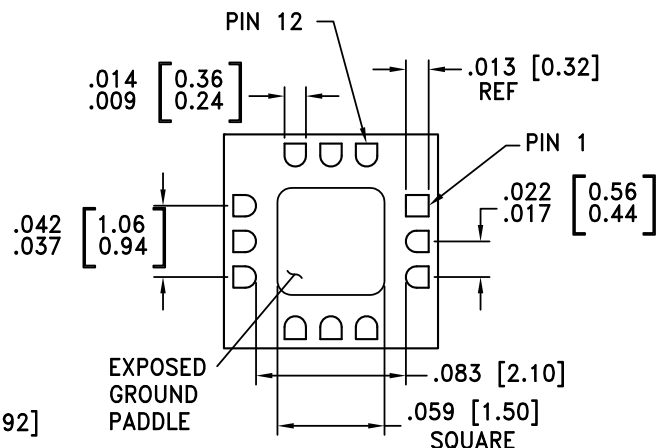

#### NOTES:

1. PACKAGE BODY MATERIAL: ALUMINA.
2. LEAD AND GROUND PADDLE PLATING: GOLD FLASH OVER NICKEL.
3. DIMENSIONS ARE IN INCHES (MILLIMETERS).
4. LEAD SPACING TOLERANCE IS NON-CUMULATIVE.
5. CHARACTERS TO BE HELVETICA MEDIUM, .025 HIGH, BLACK INK, OR LASER MARK LOCATED APPROX. AS SHOWN.
6. PACKAGE WARP SHALL NOT EXCEED 0.05MM DATUM -C-
7. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.

### Package Information

| Part Number | Package Body Material | Lead Finish      | MSL Rating | Package Marking [2] |
|-------------|-----------------------|------------------|------------|---------------------|
| HMC773LC3B  | Alumina, White        | Gold over Nickel | MSL3 [1]   | H773<br>XXXX        |

[1] Max peak reflow temperature of 260 °C

[2] 4-Digit lot number XXXX

For price, delivery and to place orders: Hittite Microwave Corporation, 2 Elizabeth Drive, Chelmsford, MA 01824

Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)




MICROWAVE CORPORATION v04.0514

**HMC773LC3B****GaAs MMIC FUNDAMENTAL  
MIXER, 6 - 26 GHz****Pin Descriptions**

| Pin Number         | Function | Description                                                                                                                                                                                                                                                                                                                                                  | Interface Schematic |
|--------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 1, 3, 7, 9, 10, 12 | GND      | These pins and package bottom must also be connected to RF/DC ground.                                                                                                                                                                                                                                                                                        |                     |
| 2                  | LO       | This pin is AC coupled and matched to 50 Ohms.                                                                                                                                                                                                                                                                                                               |                     |
| 5                  | IF       | This pin is DC coupled. For applications not requiring operation to DC, this port should be DC blocked externally using a series capacitor whose value has been chosen to pass the necessary IF frequency range. For operation to DC, this pin must not source or sink more than 2 mA of current or part non-function and possible part failure will result. |                     |
| 8                  | RF       | This pin is AC coupled and matched to 50 Ohms.                                                                                                                                                                                                                                                                                                               |                     |
| 4, 6, 11           | N/C      | These pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally.                                                                                                                                                                                                                   |                     |

### Evaluation PCB

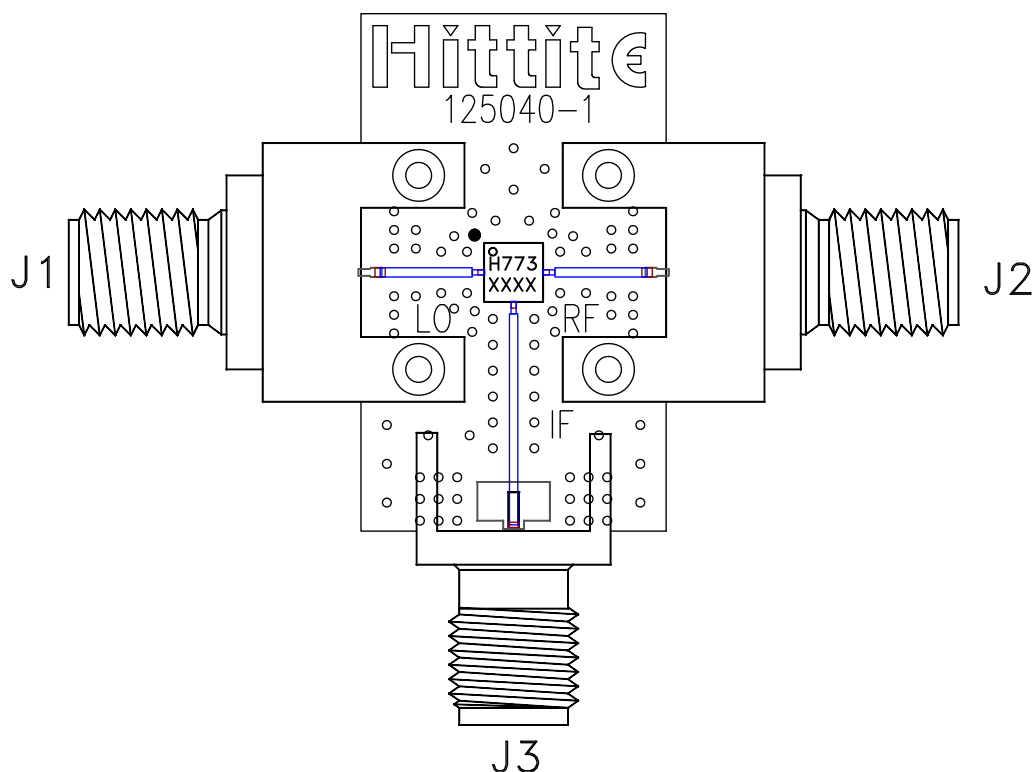

### List of Materials for Evaluation PCB 125042 <sup>[1]</sup>

| Item    | Description                  |
|---------|------------------------------|
| J1 - J2 | SRI SMA Connector            |
| J3      | 2.92mm PCB Mount K-Connector |
| U1      | HMC773LC3B Mixer             |
| PCB [2] | 125040 Evaluation PCB        |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Arlon 25FR or Rogers 4350

The circuit board used in this application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.