

# JTD SERIES INDICATOR® POWR-PRO® FUSES

**POWR-PRO**® 600 V ac • Time Delay •  $\frac{8}{10}$ -600 A



## Description

The Littelfuse POWR-PRO® JTD\_ID Indicator Class J fuse provides visual blown fuse indication and maximum protection in a compact package. The current-limiting time delay JTD\_ID offers a patented design which reduces nuisance fuse openings.

## Features/Benefits

- POWR-PRO® Performance
- Current-Limiting
- IEC Type 2 Protection
- Indication and non-indication version available
- Indicating and DIN mount holders available
- Dual-element design

## Applications

- Fused combination motor controllers and motor control centers
- Transformer protection
- Protection for series rated molded case circuit-breaker panels
- General purpose circuits

## Specifications

|                            |  |
|----------------------------|--|
| <b>Voltage Ratings</b>     | AC: 600 V<br>DC: 300 V ( $\frac{8}{10}$ -100 A)<br>500 V (110-600 A)   |
| <b>Amperage Range</b>      | $\frac{8}{10}$ -600 A  |
| <b>Interrupting Rating</b> | AC: 200 kA rms symmetrical<br>300kA rms symmetrical<br>(Littelfuse self-certified)   |
| <b>Material</b>            | DC: 20 kA<br>Body: Melamine<br>Caps: Nickel-plated Bronze ( $\frac{8}{10}$ -60 A)<br>Brass (70-200 A)<br>Brass Cap with Copper Blade (225-600 A) |
| <b>Approvals</b>           | AC: Standard 248-8, Class J<br>UL Listed (File: E81895)<br>CSA Certified (File: LR29862)<br>DC: Littelfuse self-certified                        |
| <b>Country of Origin</b>   | Mexico   |

## Ordering Information

| AMPERAGE RATINGS |    |    |     |    |     |     |     |
|------------------|----|----|-----|----|-----|-----|-----|
| $\frac{8}{10}$   | 2¼ | 4½ | 10  | 35 | 90  | 225 | 600 |
| 1                | 2½ | 5  | 12  | 40 | 100 | 250 | -   |
| 1¼               | 2¾ | 5¾ | 15  | 45 | 110 | 300 | -   |
| 1½               | 3  | 6  | 17½ | 50 | 125 | 350 | -   |
| 1⅝               | 3¾ | 7  | 20  | 60 | 150 | 400 | -   |
| 1⅞               | 3½ | 8  | 25  | 70 | 175 | 450 | -   |
| 2                | 4  | 9  | 30  | 80 | 200 | 500 | -   |

| TYPE           | SERIES | AMPERAGE | CATALOG NUMBER | ORDERING NUMBER |
|----------------|--------|----------|----------------|-----------------|
| INDICATING     | JTD_ID | 60       | JTD60ID        | 0JTD060.TXID    |
| NON-INDICATING | JTD    | 60       | JTD60          | 0JTD060.T       |

## Web Resources

Time-current curves, data sheets and additional technical information: [littelfuse.com/jtd](http://littelfuse.com/jtd)

## Recommended Fuse Holders

LFJ60 Series  
LFPSJ Series ( $\frac{8}{10}$ -60 A)

# JTD DIMENSIONS AND CURRENT-LIMITING EFFECTS

## Dimensions Inches (mm)

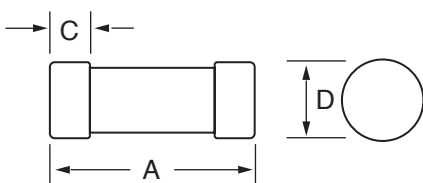


Fig. 1

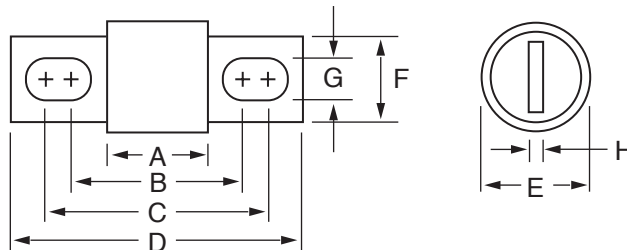


Fig. 2

## Dimensions of JTD\_ID & JTD

| AMPERAGE | FIG. NO. | DIMENSIONS INCHES (mm) |                |                |              |            |             |              |            |
|----------|----------|------------------------|----------------|----------------|--------------|------------|-------------|--------------|------------|
|          |          | A                      | B              | C              | D            | E          | F           | G            | H          |
| 1-30     | 1        | 2¼ (57.2)              | —              | ½ (12.7)       | 13/16 (20.6) | —          | —           | —            | —          |
| 35-60    | 1        | 2¾ (60.3)              | —              | 5/8 (15.9)     | 11/16 (27.0) | —          | —           | —            | —          |
| 70-100   | 2        | 2½ (66.7)              | 317/32 (89.7)  | 323/32 (94.5)  | 45/8 (117.5) | 1/8 (28.6) | ¾ (19.1)    | 9/32 (7.1)   | 1/8 (3.2)  |
| 110-200  | 2        | 3 (76.2)               | 49/32 (108.7)  | 415/32 (113.5) | 53/4 (146.1) | 1½ (38.1)  | 1/8 (28.6)  | 9/32 (7.1)   | 3/16 (4.8) |
| 225-400  | 2        | 3¾ (85.7)              | 5/8 (130.2)    | 5¾ (136.5)     | 7/8 (181.0)  | 2 (50.8)   | 15/8 (41.3) | 13/32 (10.3) | ¼ (6.4)    |
| 450-600  | 2        | 3¾ (95.3)              | 527/32 (148.4) | 65/32 (156.4)  | 8 (203.2)    | 2½ (63.5)  | 2 (50.8)    | 17/32 (13.5) | 3/8 (9.5)  |

## Electrical Specifications

| ORDERING NUMBER | AMPERAGE RATING | VOLTAGE RATING |     | INTERRUPTING RATING |       | WATTS LOSS AT 100% RATED CURRENT (W) | WATTS LOSS AT 80% RATED CURRENT (W) | TOTAL CLEARING I²T (A² SEC) 200 kA | AGENCY APPROVALS |     |
|-----------------|-----------------|----------------|-----|---------------------|-------|--------------------------------------|-------------------------------------|------------------------------------|------------------|-----|
|                 |                 | AC             | DC  | AC                  | DC    |                                      |                                     |                                    | UL               | CSA |
| 0JTD003.T       | 3               | 600            | 300 | 200 kA              | 20 kA | 4.537                                | 2.801                               | 820                                | •                | •   |
| 0JTD010.T       | 10              | 600            | 300 | 200 kA              | 20 kA | 4.087                                | 2.418                               | 1690                               | •                | •   |
| 0JTD030.T       | 30              | 600            | 300 | 200 kA              | 20 kA | 4.247                                | 2.92                                | 4754                               | •                | •   |
| 0JTD060.T       | 60              | 600            | 300 | 200 kA              | 20 kA | 6.447                                | 3.83                                | 10450                              | •                | •   |
| 0JTD100.V       | 100             | 600            | 300 | 200 kA              | 20 kA | 7.463                                | 4.447                               | 68150                              | •                | •   |
| 0JTD200.X       | 200             | 600            | 500 | 200 kA              | 20 kA | 18.39                                | 10.187                              | 159000                             | •                | •   |
| 0JTD400.X       | 400             | 600            | 500 | 200 kA              | 20 kA | 40.037                               | 23.463                              | 1055000                            | •                | •   |
| 0JTD600.X       | 600             | 600            | 500 | 200 kA              | 20 kA | 61.187                               | 34.983                              | 1970000                            | •                | •   |

## Fuse Weight

| AMPERAGE | JTD-ID (POUNDS) | JTD-ID (GRAMS) | JTD (POUNDS) | JTD (GRAMS) |
|----------|-----------------|----------------|--------------|-------------|
| 8/10-3 ½ | 0.088           | 39.92          | 0.084        | 38.10       |
| 4-12     | 0.090           | 40.82          | 0.086        | 39.01       |
| 15-30    | 0.090           | 40.82          | 0.086        | 39.01       |
| 35-60    | 0.180           | 81.65          | 0.176        | 79.83       |
| 70-100   | 0.242           | 109.77         | 0.238        | 107.95      |
| 110-200  | 0.774           | 351.08         | 0.770        | 349.27      |
| 225-400  | 1.704           | 772.92         | 1.700        | 771.11      |
| 450-600  | 3.124           | 1417.02        | 3.120        | 1415.21     |

# JTD SERIES CLASS J FUSE

## Current-Limiting Effects of JTD & JTDID (600 V) Fuses

| SHORT CIRCUIT CURRENT† | APPARENT RMS SYMMETRICAL CURRENT FOR VARIOUS FUSE RATINGS |       |       |       |        |        |
|------------------------|---|-------|-------|-------|--------|--------|
|                        | 30 A  | 60 A  | 100 A | 200 A | 400 A  | 600 A  |
| 5,000                  | 699   | 1,331 | 1,903 | 2,858 | 4,702  | -      |
| 10,000                 | 881   | 1,676 | 2,397 | 3,601 | 5,925  | 7,689  |
| 15,000                 | 1,008   | 1,919 | 2,744 | 4,123 | 6,782  | 8,802  |
| 20,000                 | 1,110   | 2,112 | 3,020 | 4,537 | 7,464  | 9,687  |
| 25,000                 | 1,196   | 2,275 | 3,254 | 4,888 | 8,041  | 10,436 |
| 30,000                 | 1,271   | 2,418 | 3,457 | 5,194 | 8,545  | 11,089 |
| 35,000                 | 1,338   | 2,545 | 3,640 | 5,468 | 8,995  | 11,674 |
| 40,000                 | 1,398   | 2,661 | 3,805 | 5,717 | 9,405  | 12,205 |
| 50,000                 | 1,506   | 2,867 | 4,099 | 6,158 | 10,131 | 13,148 |
| 60,000                 | 1,601   | 3,046 | 4,356 | 6,544 | 10,766 | 13,972 |
| 80,000                 | 1,762   | 3,353 | 4,795 | 7,203 | 11,849 | 15,378 |
| 100,000                | 1,898   | 3,612 | 5,165 | 7,759 | 12,764 | 16,565 |
| 150,000                | 2,173   | 4,134 | 5,912 | 8,882 | 14,611 | 18,963 |
| 200,000                | 2,391   | 4,551 | 6,507 | 9,776 | 16,082 | 20,871 |

†Prospective RMS Symmetrical Amperes Short-Circuit Current  
 Note: Data derived from Peak Let-Thru Curves

## Peak Let-Thru Curve (JTD & JTDID)



**Disclaimer Notice** – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/product-disclaimer](http://www.littelfuse.com/product-disclaimer).



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.