

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0432550075

Status:


Active

Overview:

mlx

Description:

6.35mm (.250") Pitch MLX™ Power Connector Header, Vertical, with Plastic Polarizing Peg, 4 Circuits, Polyester 94V-0, Tin (Sn) Plating, White

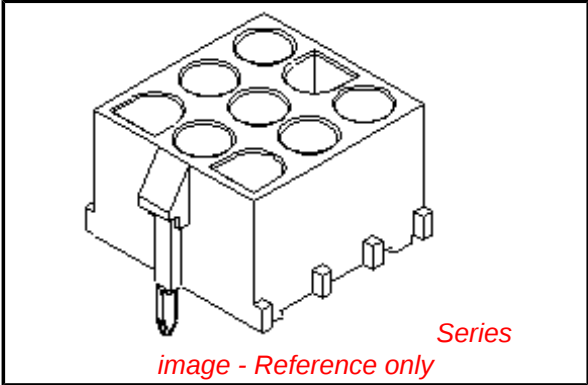

Documents:

3D Model

Drawing (PDF)

Product Specification PSX-42002-0001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

UL

LR19980

E29179

General

Product Family

Series

Application

Comments

Overview

Product Name

PCB Headers

43255

Wire-to-Board

High Vibration Application

mlx

MLX™

Physical

Breakaway

Circuits (Loaded)

Circuits (maximum)

Color - Resin

Durability (mating cycles max)

First Mate / Last Break

Flammability

Glow-Wire Compliant

Guide to Mating Part

Keying to Mating Part

Lock to Mating Part

Mated Height (in)

Mated Height (mm)

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Number of Rows

Orientation

PC Tail Length (in)

PC Tail Length (mm)

PCB Locator

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Pitch - Term. Interface (in)

Pitch - Term. Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Polarized to Mating Part

No

4

4

Natural

50

No

94V-2

No

Yes

Yes

Yes

0.400 In

10.16 mm

Phosphor Bronze

Tin

Tin

Polyester

1

Vertical

0.169 In

4.30 mm

Yes

Yes

0.062 In

1.60 mm

Bag

0.250 In

6.35 mm

0.250 In

6.35 mm

140

3.5

Yes

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

43255Series

Mates With

42021 MLX™ Power Crimp Housing Plug.

42023 MLX Crimp Terminal.

42024 MLX Crimp Terminal

Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-55°C to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	12A
Voltage - Maximum	600V

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	260


Material Info

Reference - Drawing Numbers

Packaging Specification	PK-43255-001
Product Specification	PSX-42002-0001
Sales Drawing	SDA-43255-00**

This document was generated on 05/24/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

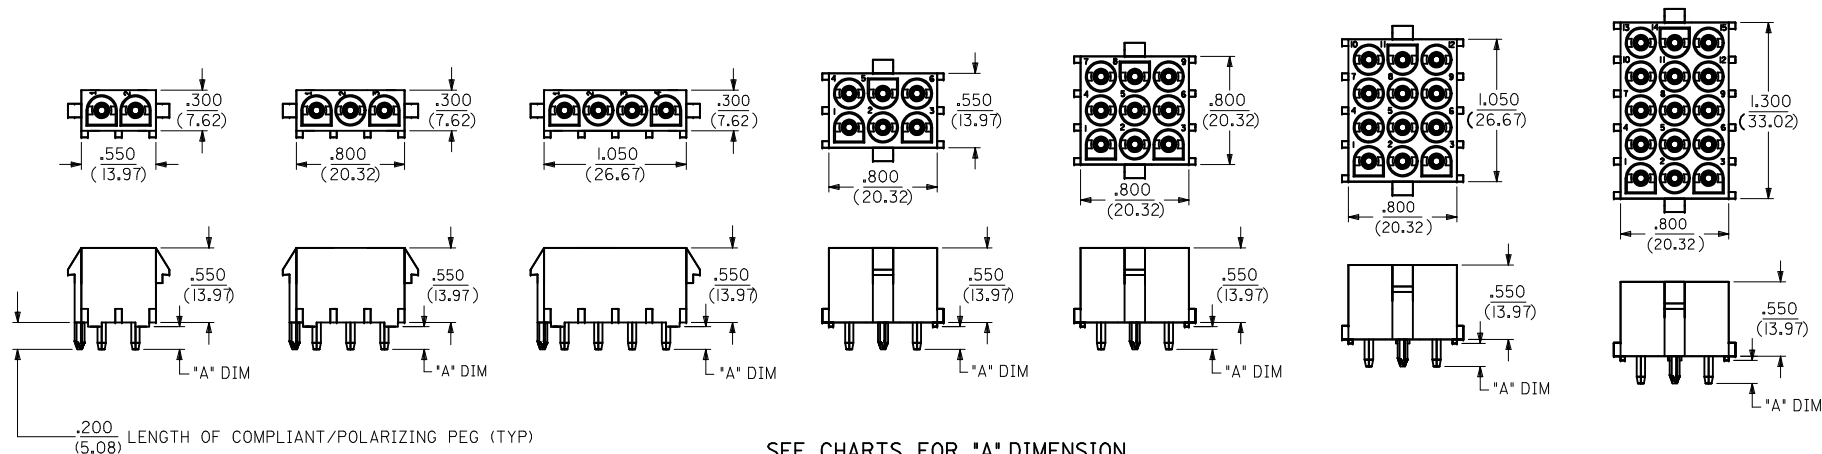


SEE CHARTS FOR 'A' DIMENSION


(THE 'A' DIMENSION APPLIES TO THE LENGTH OF THE TERMINAL ONLY)

P.C. BOARD MOUNTING DIMENSIONS

2, 3, & 4 POSITION HEADER ASSEMBLIES

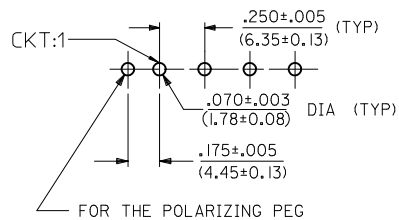

6, 9, 12 & 15 POSITION HEADER ASSEMBLIES

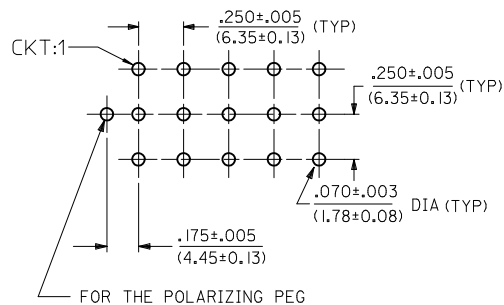

NOTES:

1) MATERIAL CODES:

- 'A'= UNREINFORCED POLYESTER, 94V-0. COLOR: WHITE
- 'C'= NYLON (PA66), UL94V-2. COLOR: NATURAL-TRANSLUCENT
- 'D'= NYLON, V-2, COLOUR: BLACK (ZYTEL 101F)
- 'E'= PA6, SCHULAMID V-2 GRADE, CTI=325V, GLOW WIRE COMPATIBLE COLOUR: NATURAL-WHITE

2) PLATING CODES:

- 'A' = TIN 140 m.l.(3.50 MICRONS) TO 240 m.l (6.00 MICRONS)

3) TERMINAL LENGTH CODES:

- I= TERMINAL FOR .062/(1.57) THICK PC BOARD

4) DIMENSIONS ARE FOR REFERENCE ONLY UNLESS INDICATED OTHERWISE.

5) HEADER ASSEMBLY HOUSINGS MATE WITH :

- PLUG HOUSINGS, .084/(2.13) DIA, SERIES: (4202I-**)

6) CONTACTS ARE ON .250/(6.35) GRID CENTERLINE SPACING.

7) PACKAGING SPECIFICATION:

- 'A' - PK-43255-001, PK-43255-002, PK-43255-003
- 'B' - PK-36518-292

RoHS COMPLIANT

ENTER DESCRIPTION EC NO: 12010-0191 DRWN:HMR01 CHKD:KPRASAD APPR:KPRASAD		QUALITY SYMBOLS DESCRIPTION REV		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
						DRAWN BY DATE		TITLE			
				4 PLACES ± --- ± ---		SUDHIR 2004/06/08		HEADER HOUSING ASSEMBLY			
				3 PLACES ± --- ± 0.005		CHECKED BY DATE		.084/(2.13) SERIES			
				2 PLACES ± 0.13 ± 0.01		GJLOWE 2004/06/08		COMPLIANT-POLARIZING PEG			
				1 PLACE ± 0.25 ± ---		APPROVED BY DATE		MOLEX MOLEX INCORPORATED			
				ANGULAR ± 1/2°		GJLOWE 2004/06/08					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
						SEE CHART		SDA-43255-00**		1 OF 2	
						SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.