

MOS FET Relays

G3VM-601AY/DY

Compact, General-purpose, Analog-switching MOS FET Relays, with Dielectric Strength of 5 kVAC between I/O Using Optical Isolation.

- Trigger LED forward current of 2 mA (maximum) facilities power saving designs.
- Switches minute analog signals.
- Continuous load current of 90 mA.

RoHS compliant

⚠ Refer to "Common Precautions".



NEW

Note: The actual product is marked differently from the image shown here.

■ Application Examples

- Power meter
- Measurement devices
- Security systems
- Industrial equipment

■ List of Models


Contact form	Terminals	Load voltage (peak value) (See the note.)	Model	Number per stick	Number per tape
SPST-NO	PCB terminals	600 V	G3VM-601AY	100	---
	Surface-mounting terminals		G3VM-601DY	---	---
			G3VM-601DY(TR)	---	1,500

Note: The AC peak and DC value are given for the load voltage.

■ Dimensions


Note: All units are in millimeters unless otherwise indicated.

G3VM-601AY

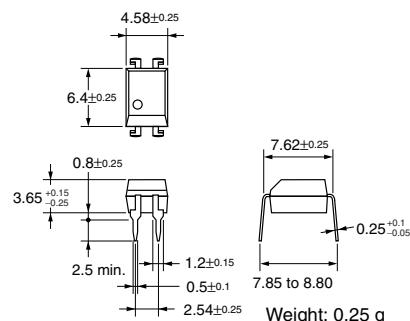

Note: The actual product is marked differently from the image shown here.


G3VM-601DY

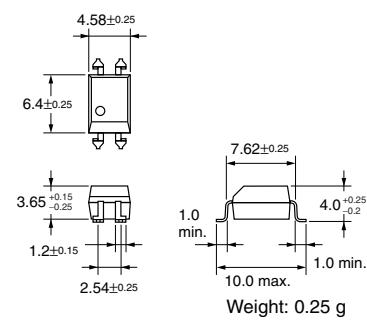



Note: The actual product is marked differently from the image shown here.

■ Terminal Arrangement/Internal Connections (Top View)

G3VM-601AY




G3VM-601DY



Note: The actual product is marked differently from the image shown here.


■ PCB Dimensions (Bottom View)

G3VM-601AY



■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-601DY



■ Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)


Item	Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current	I_F	30	mA
	Repetitive peak LED forward current	I_{FP}	1	A
	LED forward current reduction rate	$\Delta I_F/\text{°C}$	-0.3	mA/°C
	LED reverse voltage	V_R	5	V
	Connection temperature	T_j	125	°C
Output	Load voltage (AC peak/DC)	V_{OFF}	600	V
	Continuous load current (AC peak/DC)	I_O	90	mA
	ON current reduction rate	$\Delta I_O/\text{°C}$	-0.9	mA/°C
	Pulse ON current	I_{op}	0.27	A
	Connection temperature	T_j	125	°C
Dielectric strength between input and output (See note 1.)		V_{I-O}	5,000	Vrms
Operating temperature		T_a	-40 to +85	°C
Storage temperature		T_{stg}	-55 to +125	°C
Soldering temperature (10 s)		---	260	°C
				10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■ Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Item	Symbol	Minim- um	Typical	Maxi- mum	Unit	Measurement conditions
Input	LED forward voltage	V_F	1.45	1.63	1.75	V
	Reverse current	I_R	---	---	10	μA
	Capacity between terminals	C_T	---	40	---	pF
	Trigger LED forward current	I_{FT}	---	0.3	2	mA
Output	Maximum resistance with output ON	R_{ON}	---	30	40	Ω
				45	60	
	Current leakage when the relay is open	I_{LEAK}	---	---	1.0	μA
	Capacity between terminals	C_{OFF}	---	75	---	pF
Capacity between I/O terminals		C_{I-O}	---	0.8	---	pF
Insulation resistance		R_{I-O}	1,000	---	---	MΩ
Turn-ON time		t_{ON}	---	0.2	1	ms
Turn-OFF time		t_{OFF}	---	0.2	1	ms
						$I_F = 5 \text{ mA}, R_L = 200 \Omega, V_{DD} = 10 \text{ V}$ (See note 2.)

Note: 2. Turn-ON and Turn-OFF Times

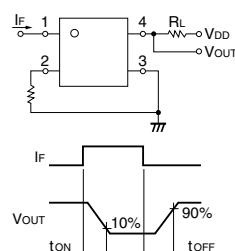

■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	---	---	480	V
Operating LED forward current	I_F	3	5	20	mA
Continuous load current (AC peak/DC)	I_O	---	---	90	mA
Operating temperature	T_a	-20	---	65	°C


■ Engineering Data

Load Current vs. Ambient Temperature

G3VM-601AY(DY)

■ Safety Precautions

Refer to "Common Precautions" for all G3VM models.

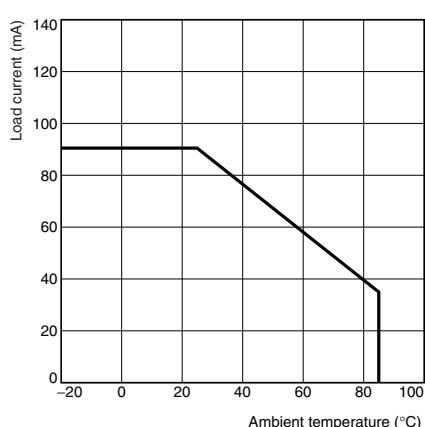



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.