

NVIDIA GTX 1050Ti 4GB GDDR5

PCIe® ADD-IN BOARD

GFX-NG1050TIF16-5D

MPN: 2A2-G000036000

Datasheet



CONTENTS


| | |
|---|---|
| 1. Feature | 3 |
| 2. Functional Overview | 4 |
| 2.1. GPU Block diagram | 4 |
| 2.2. Memory Interface | 4 |
| 2.3. Features and Technologies | 5 |
| 2.4. Display | 5 |
| 2.5. Digital Audio | 5 |
| 2.6. Video | 5 |
| 3. Output PIN Assignment and Description | 6 |
| 3.1. DVI-D Connector Pinout | 6 |
| 3.2. HDMI 2.0 Connector Pinout | 6 |
| 3.3. DisplayPort Connector..... | 7 |
| 4. Power Specifications | 8 |
| 5. Thermal Specifications | 8 |
| 6. Output configuration and Board Dimension | 9 |
| 6.1. Output Configuration | 9 |
| 6.2. Board Dimension | 9 |

1. Feature

| Part No. | GFX-NG1050TIF16-5D |
|---------------------------------|---|
| Graphics Processing Unit | |
| GPU | GeForce GTX 1050Ti (GP107) |
| Process Technology | 14 nm |
| Base clock | 1290 MHz |
| Boost clock | 1392MHz |
| Form Factor | Dual slot ATX |
| Card Interface | PCI Express® 3.0 (X16) |
| CUDA Cores | 768 |
| Floating Point Performance | 1981 GFLOPs |
| DirectX® capability | DirectX® 12 (Feature Level 12.1) |
| OpenGL | OpenGL™ 4.5 |
| Video Decoder | HEVC, H.264, VC-1, MPEG-2, MPEG-4 part 2 decode |
| Memory | |
| Memory Clock | 3504 MHz / 7.0 Gbps |
| DDR Type | GDDR5 |
| Memory Bus | 128-bits |
| Memory Size | 4096MB |
| Display Interface | |
| Display Output | Dual Link DVI-D, HDMI2.0b, DisplayPort 1.4 |
| Multi-Display | 3 |
| Board spec. | |
| External Power | No |
| Power Consumption | 75W |
| Operating Temperature | 0°C~50°C |
| Dimensions | 161mm (L) x 111mm (H) |

2. Functional Overview

2.1. GPU Block diagram

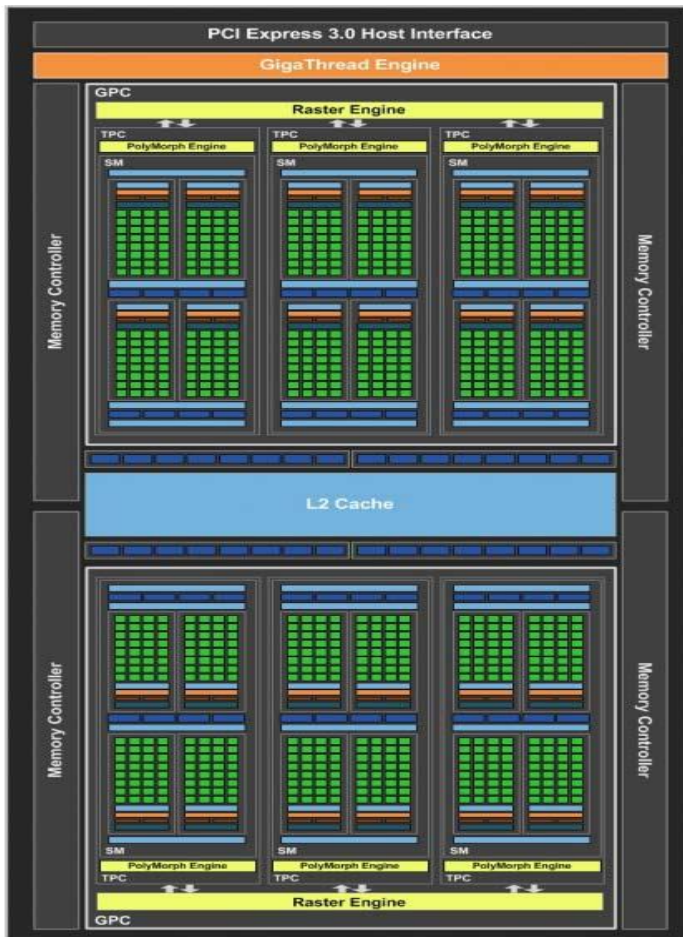

2.2. Memory Interface

Memory configuration support:

The 1050TI4096A5128Z supports industry standard GDDR5 technology memory interface. The Frame Buffer DRAM interface of GP107 is 128-bit. All DRAM devices must be the same type, and the same size on each channel, and must run at the same voltage.

GDDR5 Memory Configuration :

- GDDR5 Configuration: 256Mx32
- The GP107 GPU supports a frame buffer interface up to 128 bits.

2.3. Features and Technologies

- ▶ Direct X 12 with Feature Level 12.1
- ▶ OpenGL 4.5
- ▶ NVIDIA CUDA technology
- ▶ NVIDIA G-SYNC-ready
- ▶ Vulkan API
- ▶ NVIDIA GPU Boost 3.0

2.4. Display

- ▶ Support multi monitor at 3
- ▶ DVI-D: Dual-link resolution 2560 x 1600 @60 Hz refresh rate
- ▶ Support maximum resolution at 4096x2160 (4K)@60Hz refresh rate on HDMI
- ▶ Support maximum resolution at 4096x2160 (4K)@60Hz on DisplayPort
- ▶ HDCP: Provides digital content protection on any Digital display
- ▶ HDCP 2.2 support on HDMI & DisplayPort

2.5. Digital Audio

- ▶ Supports for HD Audio over PCI Express
- ▶ Multi-channel (7.1) LPCM
- ▶ Data rates up to 192KHz
- ▶ Word sizes of 16-bit, 20-bit, and 24-bit

2.6. Video

The following video formats are supported:

- ▶ MPEG-2
- ▶ MPEG-4 Part 2 Advanced Simple Profile
- ▶ H.264 SVC codec support
- ▶ Support for 3D Blu-Ray
- ▶ VC1
- ▶ DivX version 3.11 and later
- ▶ MVC
- ▶ HEVC(H.265)
- ▶ VP9

A full range of video resolutions are supported including 1080p, 1080i, 720p, 480p and 480i.

3. Output PIN Assignment and Description

3.1. DVI-D Connector Pinout


| Pin | Signal | Pin | Signal |
|-----|----------------------|-----|----------------------------|
| 1 | TMDS data 2- | 13 | TMDS data 3+ |
| 2 | TMDS data 2+ | 14 | +5VDC power |
| 3 | TMDS data 2/4 shield | 15 | Ground (Return for +5) |
| 4 | TMDS data 4- | 16 | Hot plug detected |
| 5 | TMDS data 4+ | 17 | TMDS data 0- |
| 6 | DDC clock | 18 | TMDS data 0+ |
| 7 | DDC data | 19 | TMDS data 0/5 shield |
| 8 | Analog vertical sync | 20 | TMDS data 5- |
| 9 | TMDS data 1- | 21 | TMDS data 5+ |
| 10 | TMDS data 1+ | 22 | TMDS clock shield |
| 11 | TMDS data 1/3 shield | 23 | TMDS clock+ |
| 12 | TMDS data 3- | 24 | TMDS clock- |
| C1 | Analog red | C4 | Analog horizontal sync |
| C2 | Analog green | C5 | Analog ground (RGM return) |
| C3 | Analog blue | | |

3.2. HDMI 2.0 Connector Pinout

| Pin | Signal | Pin | Signal |
|-----|--------------------|-----|-------------------|
| 1 | TMDS Data 2+ | 11 | TMDS Clock Shield |
| 2 | TMDS Data 2 Shield | 12 | TMDS Clock- |
| 3 | TMDS Data 2- | 13 | No Connect |
| 4 | TMDS Data 1+ | 14 | No Connect |
| 5 | TMDS Data 1 Shield | 15 | DDC Clock |
| 6 | TMDS Data 1- | 16 | DDC Data |
| 7 | TMDS Data 0+ | 17 | Ground |
| 8 | TMDS Data 0 Shield | 18 | +5V Power |
| 9 | TMDS Data 0- | 19 | Hot Plug Detect |

| | | | |
|----|-------------|--|--|
| 10 | TMDS Clock+ | | |
|----|-------------|--|--|

3.3. DisplayPort Connector

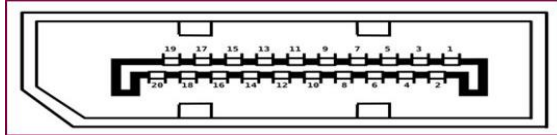

| | | |
|--------|---------------|------------------------------------|
| Pin 1 | ML_Lane 0 (p) | Lane 0 (positive) |
| Pin 2 | GND | Ground |
| Pin 3 | ML_Lane 0 (n) | Lane 0 (negative) |
| Pin 4 | ML_Lane 1 (p) | Lane 1 (positive) |
| Pin 5 | GND | Ground |
| Pin 6 | ML_Lane 1 (n) | Lane 1 (negative) |
| Pin 7 | ML_Lane 2 (p) | Lane 2 (positive) |
| Pin 8 | GND | Ground |
| Pin 9 | ML_Lane 2 (n) | Lane 2 (negative) |
| Pin 10 | ML_Lane 3 (p) | Lane 3 (positive) |
| Pin 11 | GND | Ground |
| Pin 12 | ML_Lane 3 (n) | Lane 3 (negative) |
| Pin 13 | CONFIG1 | connected to Ground ¹⁾ |
| Pin 14 | CONFIG2 | connected to Ground ¹⁾ |
| Pin 15 | AUX CH (p) | Auxiliary Channel (positive) |
| Pin 16 | GND | Ground |
| Pin 17 | AUX CH (n) | Auxiliary Channel (negative) |
| Pin 18 | Hot Plug | Hot Plug Detect |
| Pin 19 | Return | Return for Power |
| Pin 20 | DP_PWR | Power for connector (3.3 V 500 mA) |

4. Power Specifications

| Parameter | Value | Unit |
|--------------------------------------|-------|------|
| Input Board Power (Estimated) | | |
| PCI Express edge connector (12V) | 4.88 | A |
| | 58.56 | W |
| PCI Express edge connector (3V3) | 0.87 | A |
| | 2.93 | W |
| Auxiliary 6-pin power connector(12V) | N/A | A |
| | N/A | W |
| Total input graphics power (TGP) | 59.62 | W |

5. Thermal Specifications

| Parameter | Value | Unit |
|-----------------------------------|-------|------|
| Fan inlet temperature (max.) | 55 | °C |
| GPU slowdown temperature (max.Tj) | 96 | °C |
| GPU shutdown temperature | 101 | °C |

6. Output configuration and Board Dimension

6.1. Output Configuration



6.2. Board Dimension

(Unit : mm)





Revision History

| Rev. | Data | History |
|------|------------|----------------------------|
| 1.0 | 2017/04/21 | 1050TI4096A5128Z datasheet |
| | | |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.