



Part No.	Pattern Colour	Display Size (inch)	Glass Size (mm) A x B x T	Weight (g)	Filtering Area (mm) C x D	Maximum Line Width ( $\mu\text{m}$ )
EFP105X067B07A	Black	4.3	105 x 67 x 0.7	13	101 x 59	13
EFP127X098B07A	Black	5.7	127 x 98 x 0.7	22	123 x 90	13
EFP164X104B07A	Black	7	164 x 104 x 0.7	31	160 x 96	13

Typical Specifications

- Aluminium wired micro-mesh for EMI.
- Mesh diameter Typ. 300 microns.
- EMI shielding (KEC method):
  - >40dB (Electric field 1MHz to 10MHz)
  - >45dB (Electric field 10MHz to 1000MHz)
- Material: Soda lime glass.
- Low resistance maximum  $2\Omega$  (Filter center to side frame).
- Vibration: 10-55-10Hz, all amplitude 1mm, 30minutes, X-Y-Z.
- Optical: Transmittance >85%.
- Operating temperature: -40 to +85°C
- Storage temperature: -40 to +85°C
- Operating humidity: 20 to 80% R.H
- Storage humidity: 20 to 80% R.H

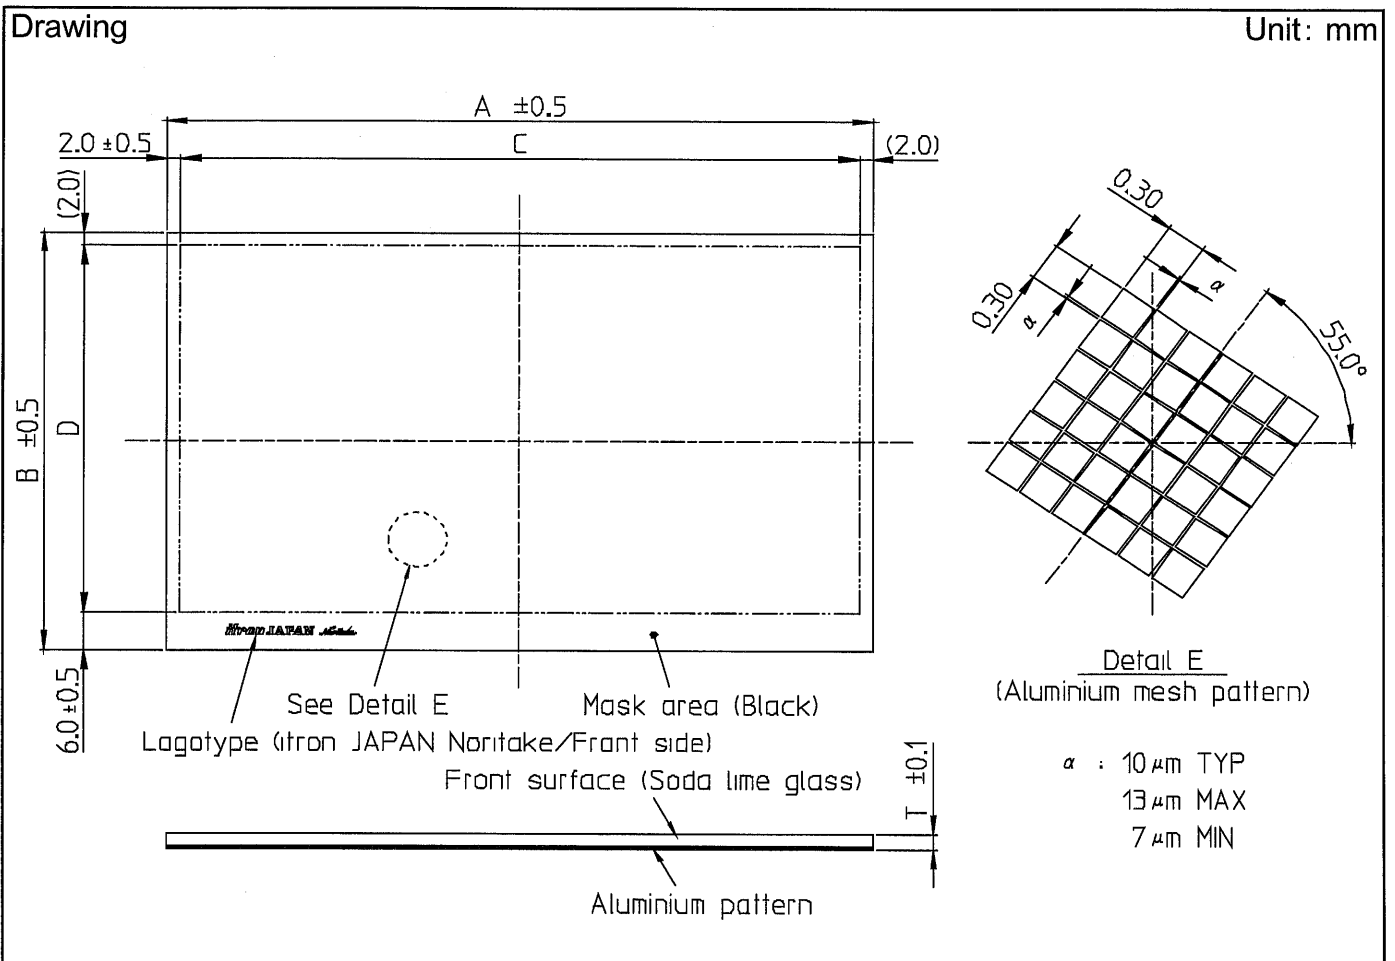


## EMI Performance Data (Electric Field 1MHz – 1000MHz)

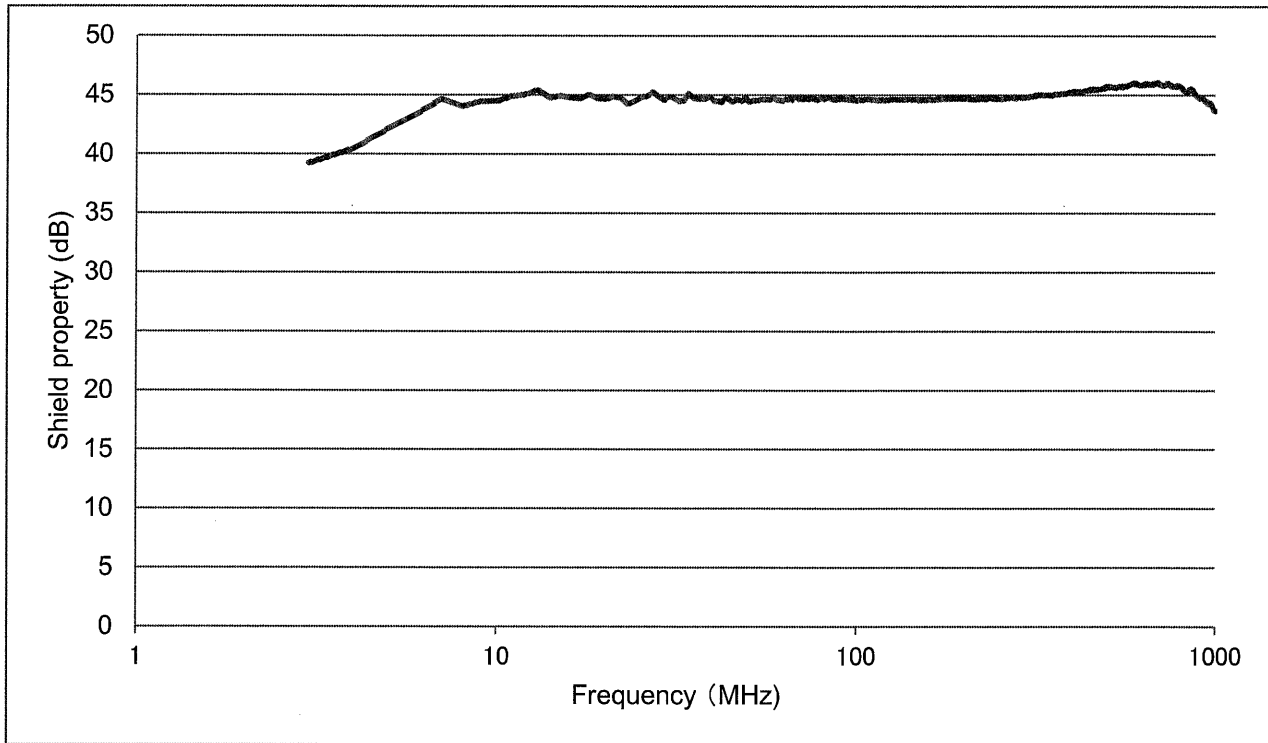

## Defect Criteria

Cracks: No cracks.

Chips: No chips exceeding the following limits.

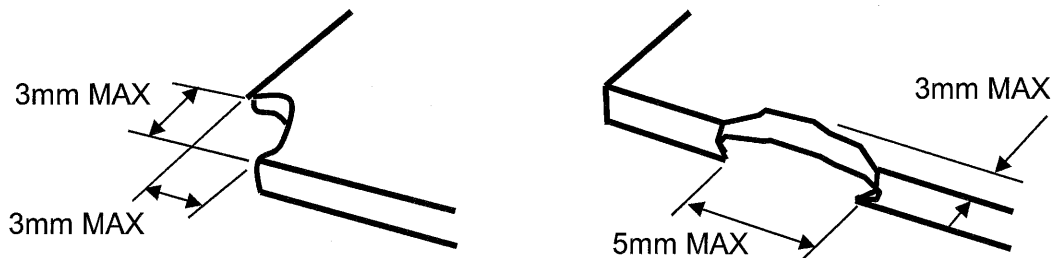

Scratches: No scratches which affect the display.

Foreign particle: Maximum of 3, diameter <math><0.3\text{mm}</math>, and spaced at least 50mm apart.

Stains: No obvious stains.


Defect Mesh Pattern: No multi defect mesh pattern.

Packing: Interleave paper with cast sleeve. (25pcs/sleeve)

Adhesive: Conductive adhesive not included (must be arranged separately by customer).

## Cautions:

1. If EMI filter forms part of the exterior surface of the device, there is a risk of damage from external impact.
2. Handling precautions
  - The product is glass. The edges and corners are sharp, so handle with care, using gloves, etc.
  - Contact with sharp metal or other objects could cause scratch, chip, or crack damage. Excessive shock, such as from being dropped, may also cause damage. Handle with care to avoid such damage.
  - Do not touch the back surface (film side) of the glass.
  - To clean the front surface (glass side), use a dry, soft cloth, or a cloth dampened with neutral detergent or ethanol. Do not use organic solvents, acid, or alkalies.

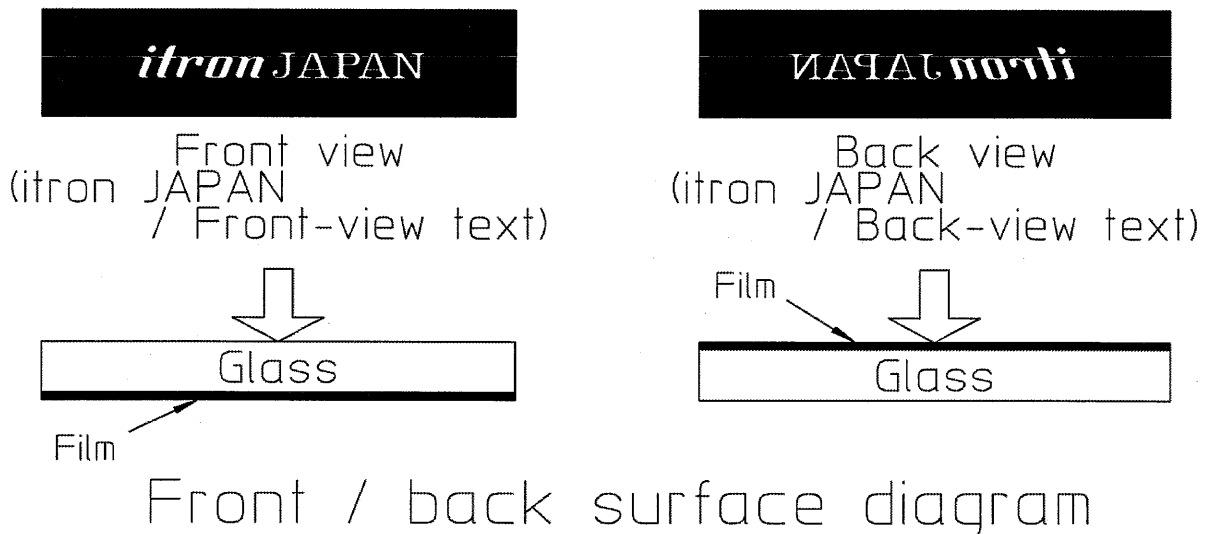

## 3. Storage

- Store in accordance with the environmental conditions stated in the specification.
- Do not stack product when storing. Do not place anything heavy on top of product.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.