

# Coin Cells

## Introduction



Since 1982, when RENATA launched the industrial production of lithium batteries, the range of applications has grown continuously. In addition to the wide spectrum of memory backup power sources, RENATA lithium batteries are used for different applications in the computer and automotive industries, telecommunications, medical industry and in an increasing number of portable devices (measuring equipment, payment systems, toys etc.).

RENATA lithium batteries meet the highest quality standards and offer excellent reliability.

### Advantages



- Nominal voltage of 3V, approx. twice the voltage level of alkaline button cells
- Wide operating temperature range depending on battery model
- Low self discharge of less than 1% per year at 23°C
- Best practical capacity/volume ratio
- Superior leakage resistance
- Excellent storage characteristics, up to 10 years storage with minimum deterioration
- Safe products: all Renata and MFR coin cells are UL-recognized products (File No. MH14002)
- Environmental-friendly, do not contain toxic substances
- No air transport restrictions (non hazardous)
- Available in a wide range of solder contact configurations or in combination with our battery holders

# Coin Cells

## Standard bare coin cells

### General characteristics


- Self-discharge: less than 1% per year at 23°C
- Shelf life: up to 10 years at max. 23°C
- Stable voltage during shelf life
- High reliability of operation, including leakage resistance
- Contains no heavy metals



### Dimensions and weights

| Model      | Max. Dimensions (mm) |      |           |          | approx<br>Weight (g) | Part.No.* |
|------------|----------------------|------|-----------|----------|----------------------|-----------|
|            | A                    | B    | C         | D        |                      |           |
| CR1025     | 10.00                | 2.50 | Ref. 6.0  | min 0.08 | 0.6                  | 700263    |
| CR1216 MFR | 12.50                | 1.60 | Ref. 10.2 | min 0.05 | 0.7                  | 100551    |
| CR1220 MFR | 12.50                | 2.00 | Ref. 10.3 | min 0.10 | 0.8                  | 100552    |
| CR1225     | 12.50                | 2.50 | Ref. 9.0  | min 0.08 | 0.9                  | 700281    |
| CR1616     | 16.00                | 1.60 | Ref. 12.0 | min 0.02 | 1.1                  | 700287    |
| CR1620     | 16.00                | 2.00 | Ref. 12.0 | min 0.06 | 1.2                  | 700291    |
| CR1632     | 16.00                | 3.20 | Ref. 12.0 | min 0.08 | 1.8                  | 700296    |
| CR2016 MFR | 20.00                | 1.60 | Ref. 18.0 | min 0.05 | 1.7                  | 100270    |
| CR2025 MFR | 20.00                | 2.50 | Ref. 17.0 | min 0.05 | 2.5                  | 100271    |
| CR2032 MFR | 20.00                | 3.20 | Ref. 17.0 | min 0.05 | 2.8                  | 100272    |
| CR2320     | 23.00                | 2.00 | Ref. 18.0 | min 0.06 | 2.7                  | 700344    |
| CR2325     | 23.00                | 2.50 | Ref. 19.0 | min 0.08 | 3.0                  | 700348    |
| CR2430 MFR | 24.50                | 3.00 | Ref. 20.0 | min 0.08 | 4.3                  | 100350    |
| CR2430     | 24.50                | 3.00 | Ref. 20.0 | min 0.08 | 4.1                  | 700359    |
| CR2450N    | 24.50                | 5.00 | Ref. 22.3 | min 2.50 | 5.9                  | 700377    |
| CR2477N    | 24.50                | 7.70 | Ref. 22.4 | min 5.30 | 8.3                  | 700391    |

\*Packaging: Industrial Bulk (IB-Trays)

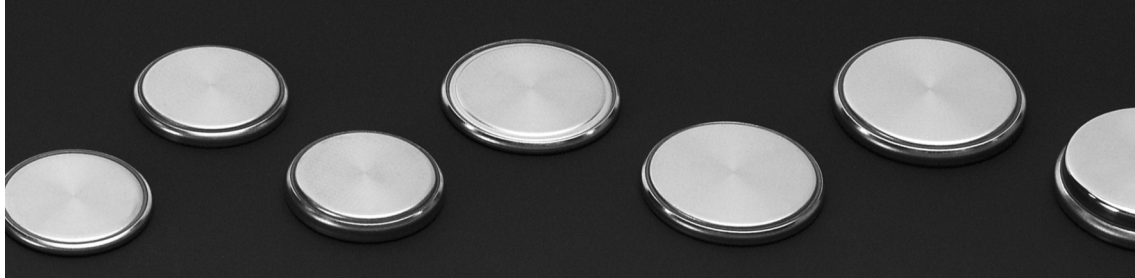

### Electrical characteristics

| Model      | Nominal capacity (mAh) | Standard discharge current (mA) <sup>1)</sup> | Max. continuous discharge current (mA) <sup>2)</sup> | Operating Temperature (C) <sup>3)</sup> |
|------------|------------------------|-----------------------------------------------|------------------------------------------------------|-----------------------------------------|
| CR1025     | 30                     | 0.05                                          | 0.40                                                 | -40/+85°                                |
| CR1216 MFR | 30                     | 0.10                                          | 1.00                                                 | -30/+70°                                |
| CR1220 MFR | 40                     | 0.10                                          | 1.00                                                 | -30/+70°                                |
| CR1225     | 48                     | 0.10                                          | 1.00                                                 | -40/+85°                                |
| CR1616     | 50                     | 0.10                                          | 1.00                                                 | -40/+85°                                |
| CR1620     | 68                     | 0.10                                          | 1.00                                                 | -40/+85°                                |
| CR1632     | 125                    | 0.20                                          | 1.50                                                 | -40/+85°                                |
| CR2016 MFR | 90                     | 0.20                                          | 3.00                                                 | -30/+70°                                |
| CR2025 MFR | 165                    | 0.30                                          | 3.00                                                 | -30/+70°                                |
| CR2032 MFR | 225                    | 0.40                                          | 3.00                                                 | -30/+70°                                |
| CR2320     | 150                    | 0.20                                          | 3.00                                                 | -40/+85°                                |
| CR2325     | 190                    | 0.30                                          | 3.00                                                 | -40/+85°                                |
| CR2430 MFR | 300                    | 0.50                                          | 4.00                                                 | -30/+70°                                |
| CR2430     | 285                    | 0.50                                          | 4.00                                                 | -40/+85°                                |
| CR2450N    | 540                    | 0.80                                          | 3.00                                                 | -40/+85°                                |
| CR2477N    | 950                    | 1.00                                          | 2.50                                                 | -40/+85°                                |

1) Standard discharge current: 100% of nominal capacity is obtained by discharging the cells at this current rates.


2) The maximum current is determined for a yield of 70% of the nominal capacity with a cut-off voltage of 2.0V, at 23°C. For currents exceeding those given above or pulsed current, please contact Renata.

3) In applications where the battery is exposed to temperatures above 70°C, please contact Renata for consultancy.


# Coin Cells

## Standard bare coin cells


**CR1025**  Rated capacity: 30 mAh  
Average weight: 0.6 g

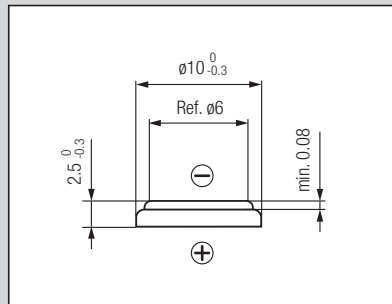


Discharge performance at 23°C

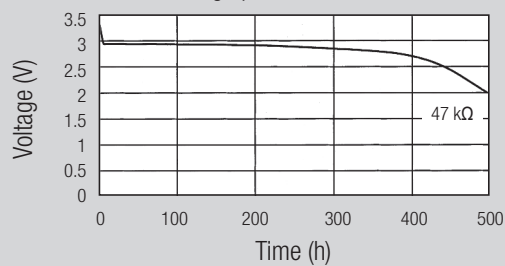


Discharge performance at 23°C

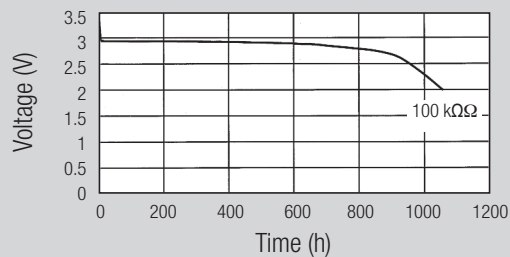


Temperature performance Load 47 kΩ

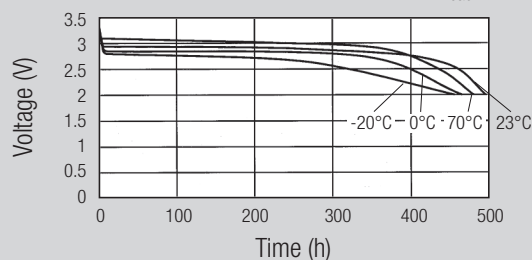


Cell capacity at various loads

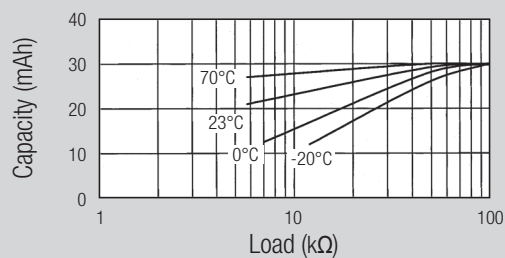


**CR1216 MFR**  Rated capacity: 30 mAh  
Average weight: 0.7 g

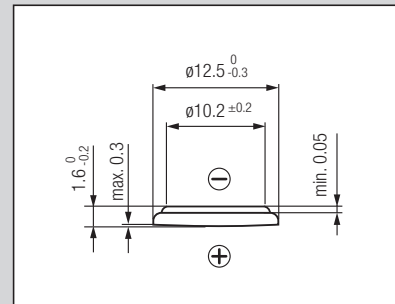


Discharge performance at 23°C

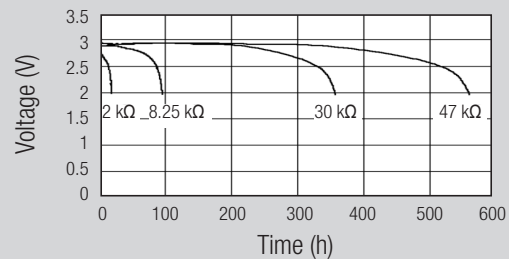


Discharge performance at 23°C

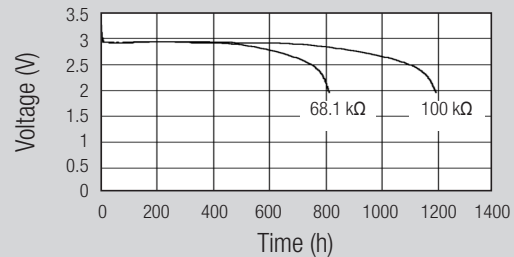


Temperature performance Load 47 kΩ

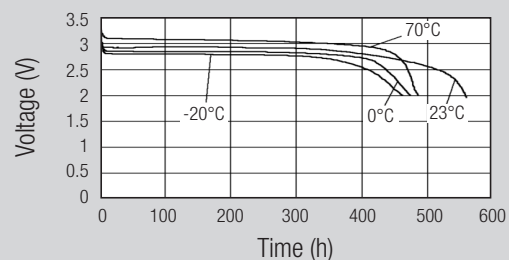


Cell capacity at various loads

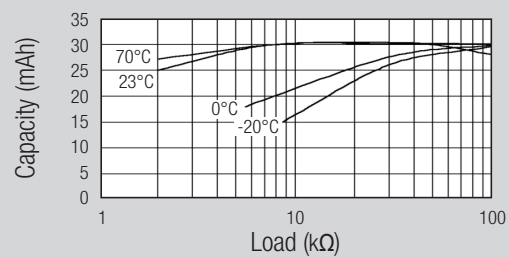


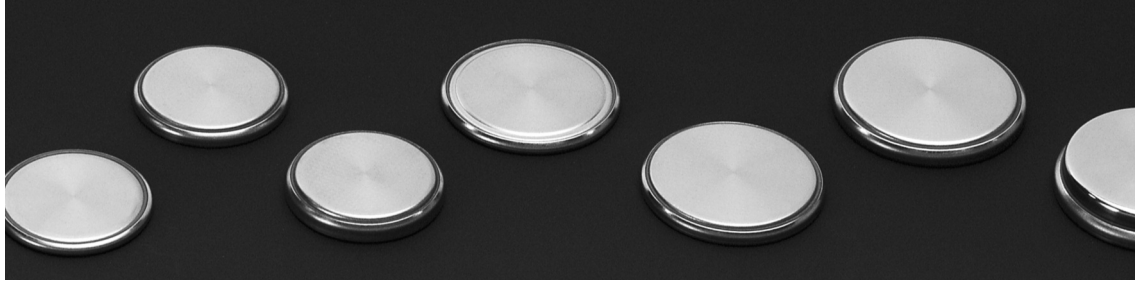


**CR1220 MFR**  Rated capacity: 40 mAh  
Average weight: 0.8 g

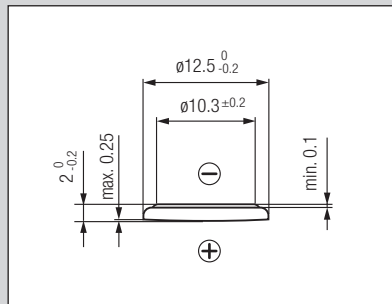


Discharge performance at 23°C

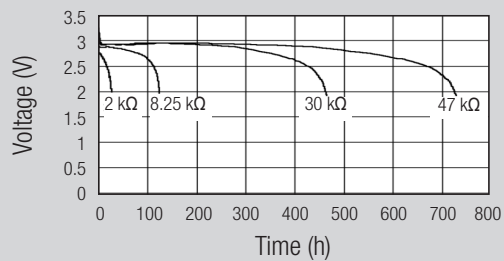


Discharge performance at 23°C

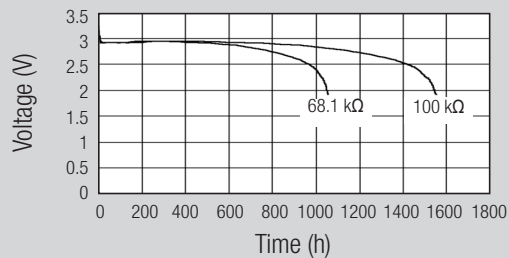


Temperature performance

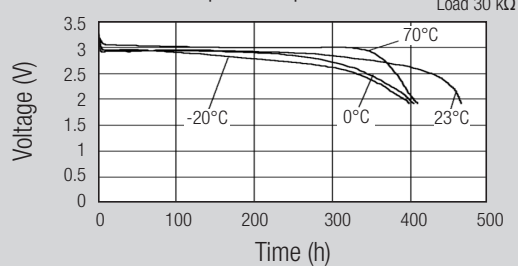


Cell capacity at various loads

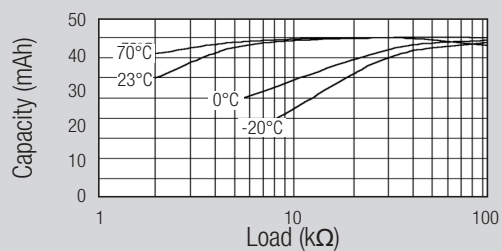


**CR1225**  Rated capacity: 48 mAh  
Average weight: 0.9 g

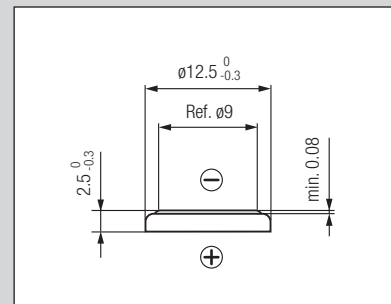


Discharge performance at 23°C

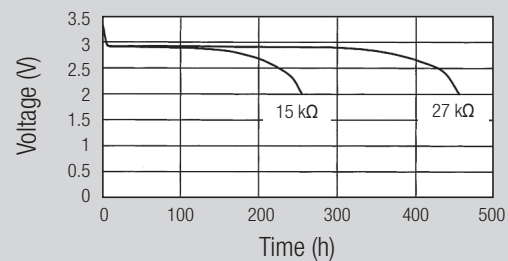


Discharge performance at 23°C

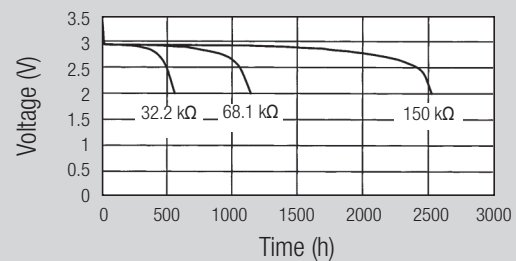

Temperature performance

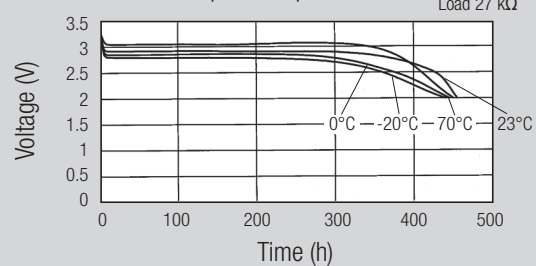


Cell capacity at various loads

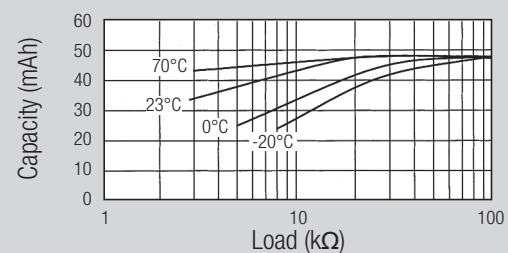


# Coin Cells

## Standard bare coin cells


**CR1616**  Rated capacity: 50 mAh  
Average weight: 1.1 g

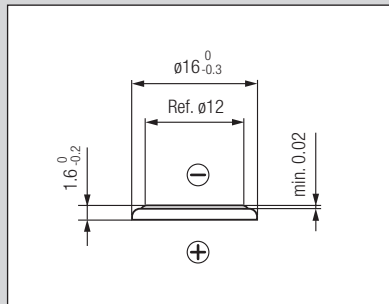


Discharge performance at 23°C

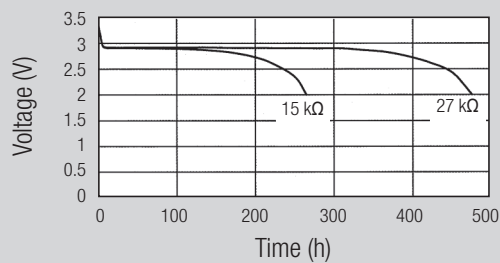


Discharge performance at 23°C

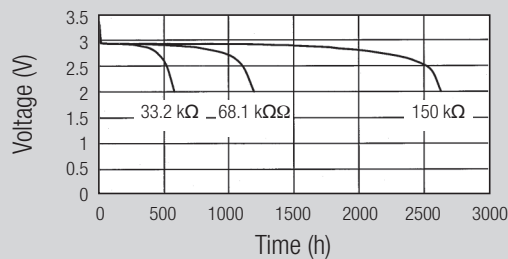


Temperature performance Load 27 kΩ

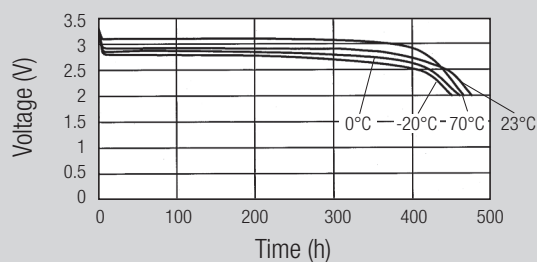


Cell capacity at various loads

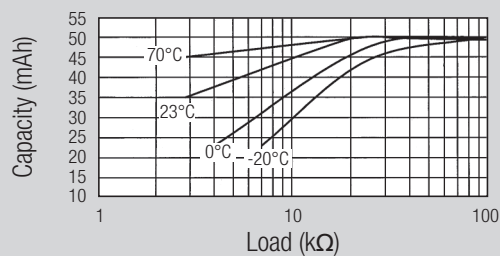


**CR1620**  Rated capacity: 68 mAh  
Average weight: 1.2 g

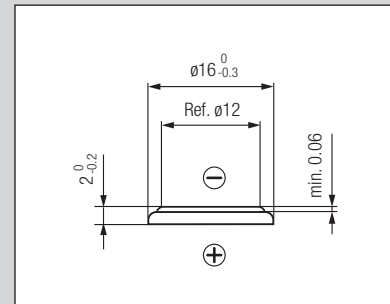


Discharge performance at 23°C

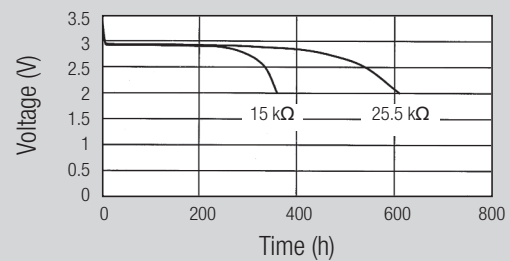


Discharge performance at 23°C

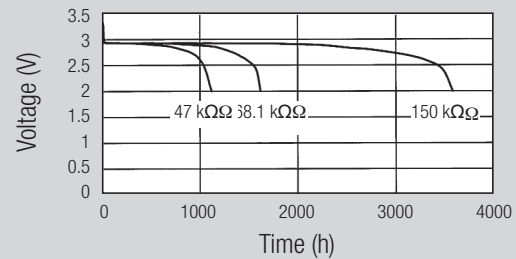


Temperature performance Load 25.5 kΩ

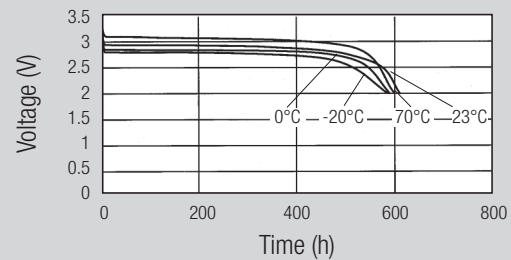


Cell capacity at various loads

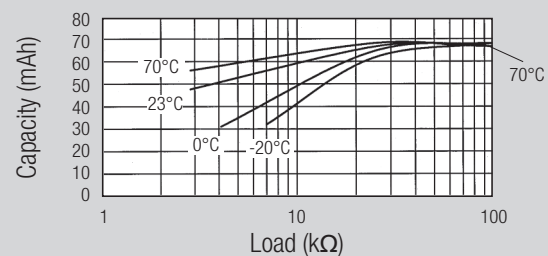


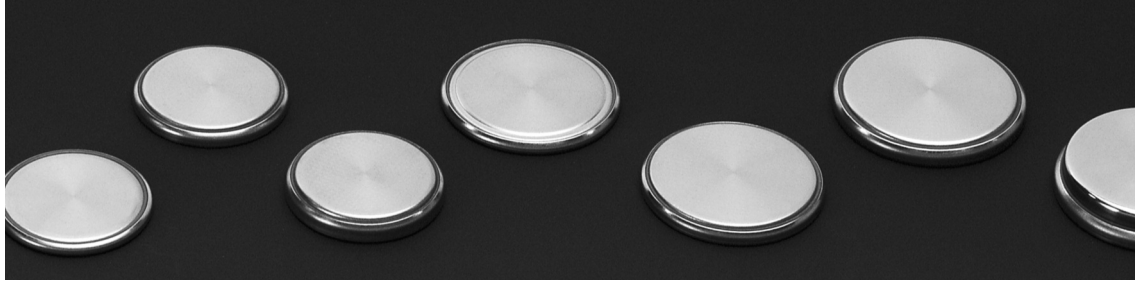


**CR1632**  Rated capacity: 125 mAh  
Average weight: 1.8 g

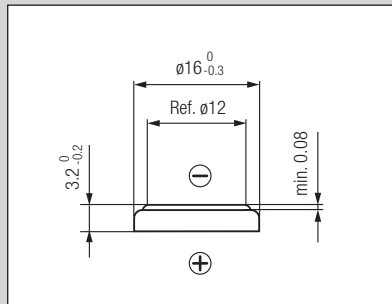


Discharge performance at 23°C

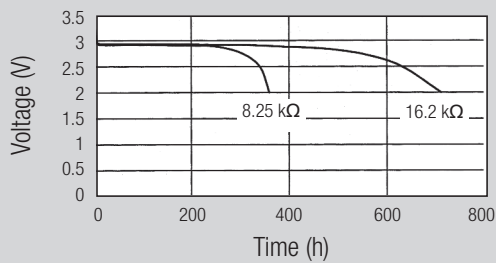


Discharge performance at 23°C

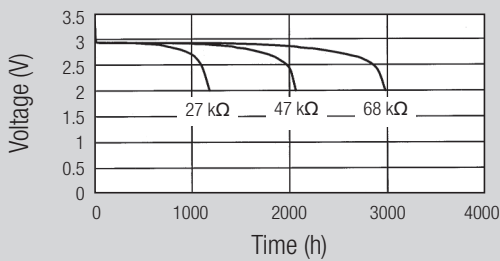


Temperature performance Load 16.2 kΩ

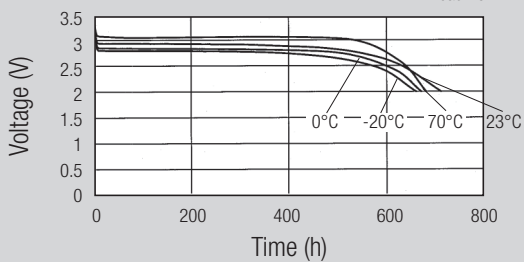


Cell capacity at various loads

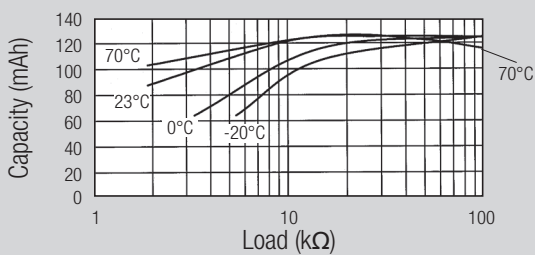


**CR2016 MFR**  Rated capacity: 90 mAh  
Average weight: 1.7 g

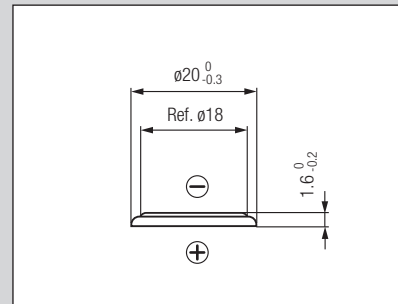


Discharge performance at 23°C

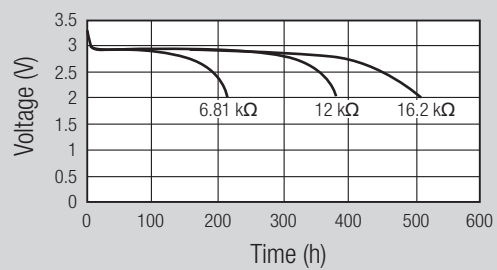


Discharge performance at 23°C

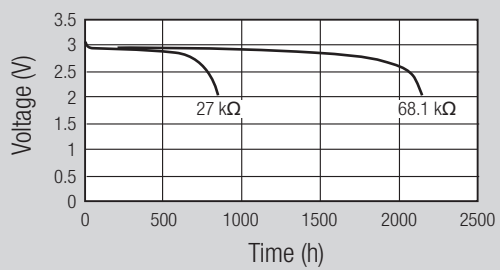

Temperature performance Load 27 kΩ

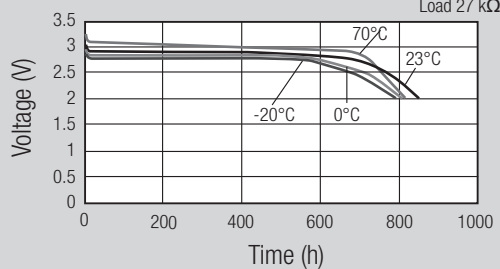


Cell capacity at various loads

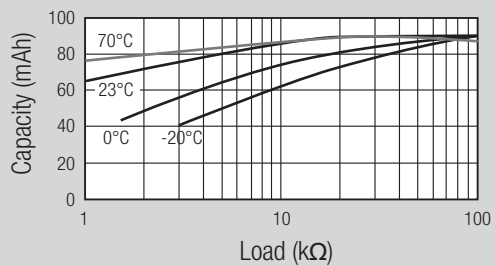


# Coin Cells

## Standard bare coin cells


**CR2025 MFR**  Rated capacity: 165 mAh  
Average weight: 2.5 g

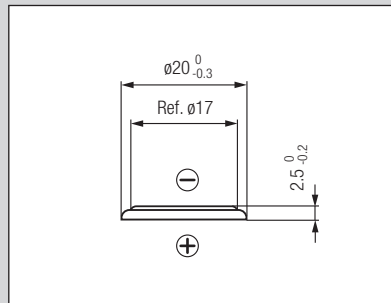


Discharge performance at 23°C

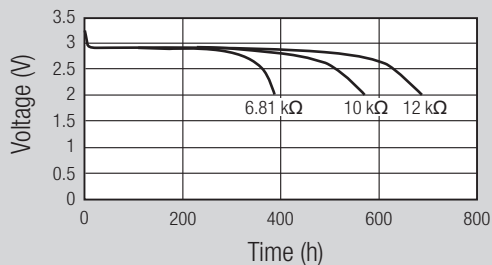


Discharge performance at 23°C

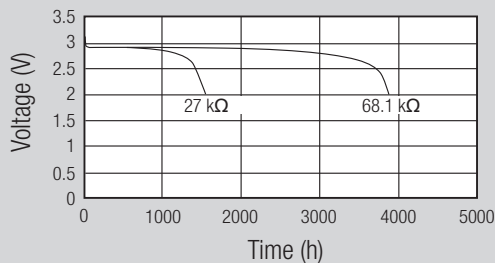


Temperature performance

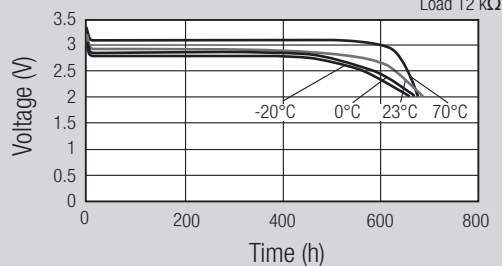


Cell capacity at various loads

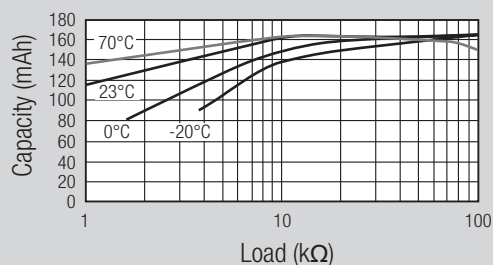


**CR2032 MFR**  Rated capacity: 225 mAh  
Average weight: 2.8 g

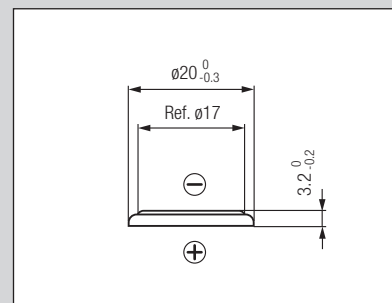


Discharge performance at 23°C

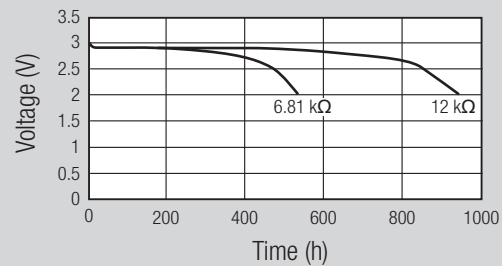


Discharge performance at 23°C

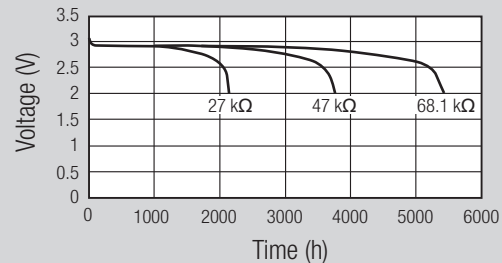


Temperature performance

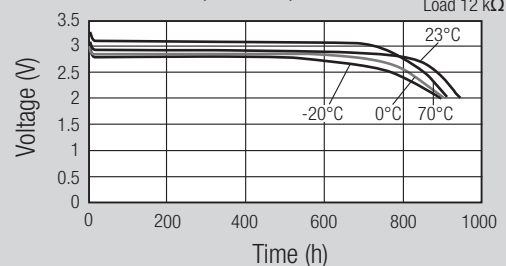


Cell capacity at various loads

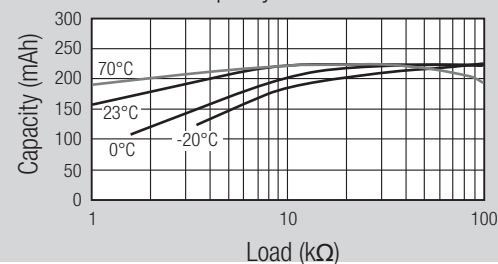




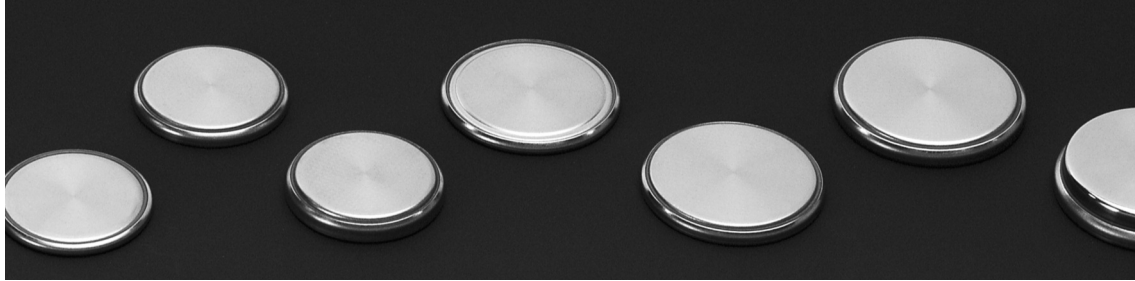


**CR2320**  Rated capacity: 150 mAh  
Average weight: 2.7 g

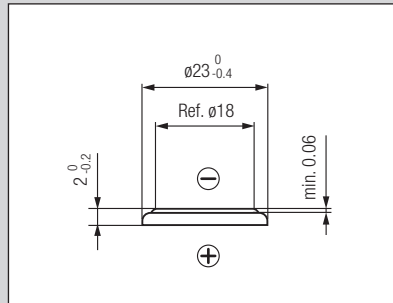


Discharge performance at 23°C

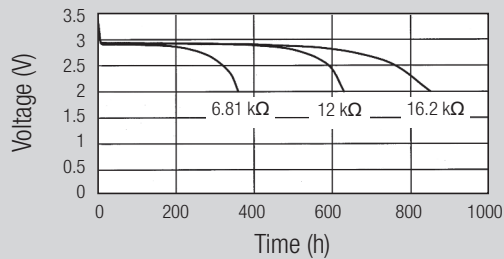


Discharge performance at 23°C

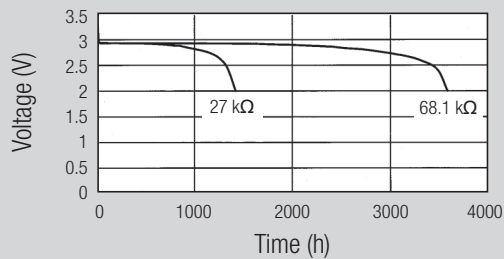


Temperature performance Load 16.2 kΩ

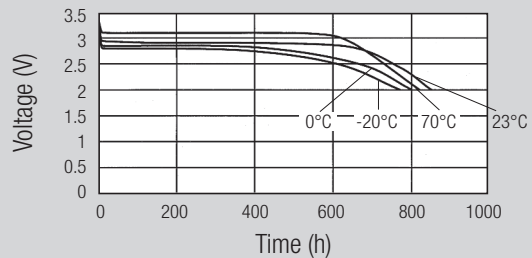


Cell capacity at various loads

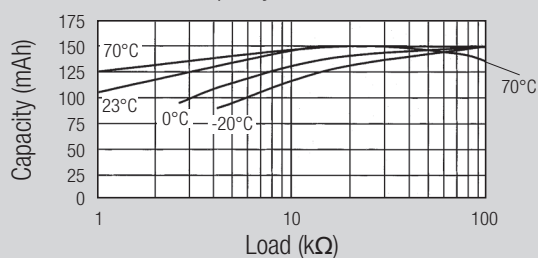


**CR2325**  Rated capacity: 190 mAh  
Average weight: 3.0 g

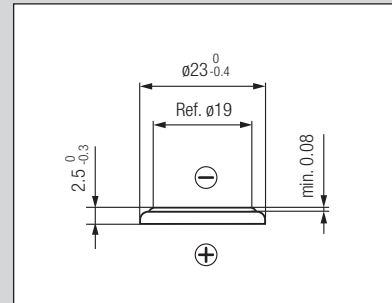


Discharge performance at 23°C

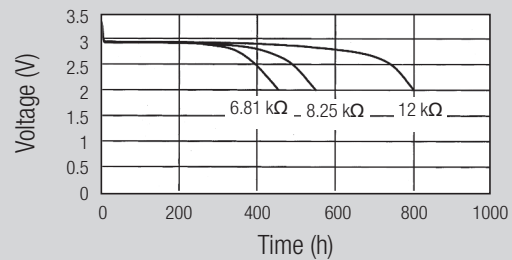


Discharge performance at 23°C

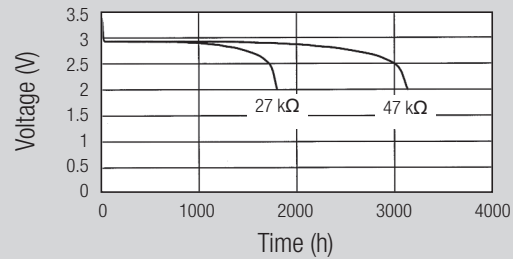

Temperature performance Load 12 kΩ

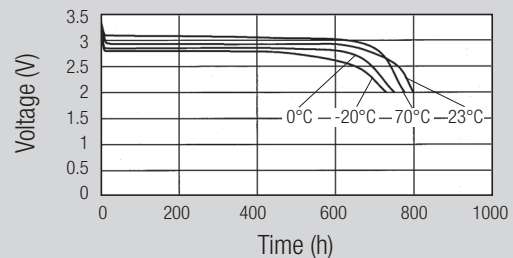


Cell capacity at various loads

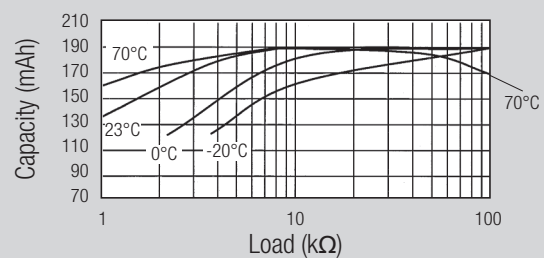


# Coin Cells

## Standard bare coin cells


**CR2430**  Rated capacity: 285 mAh  
Average weight: 4.1 g

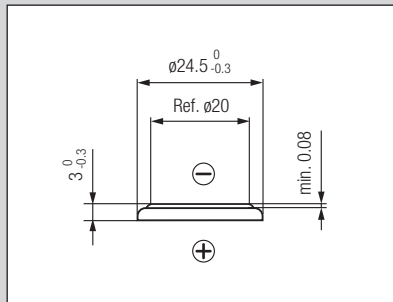


Discharge performance at 23°C

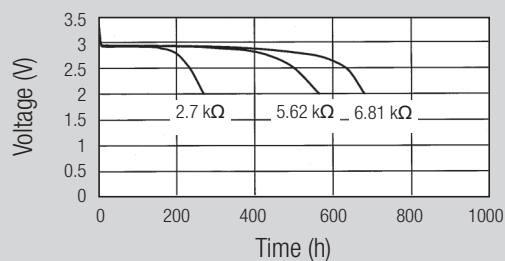


Discharge performance at 23°C

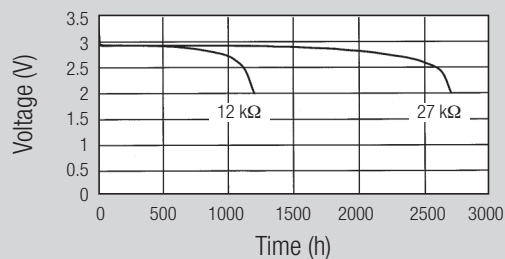


Temperature performance Load 12 kΩ

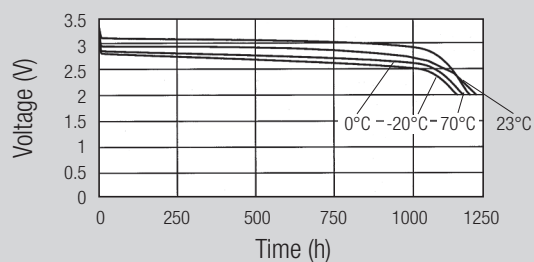


Cell capacity at various loads

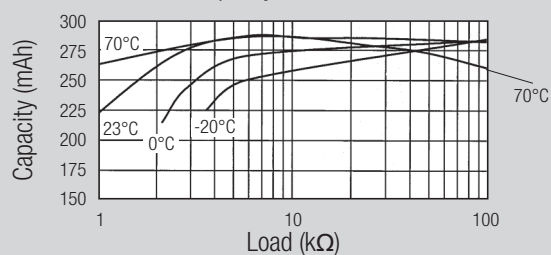


**CR2430 MFR**  Rated capacity: 300 mAh  
Average weight: 4.3 g

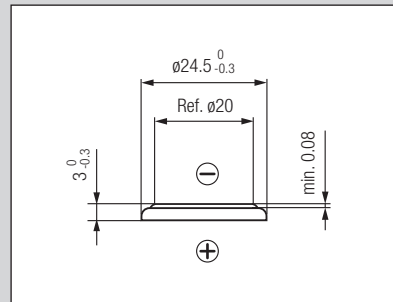


Discharge performance at 23°C

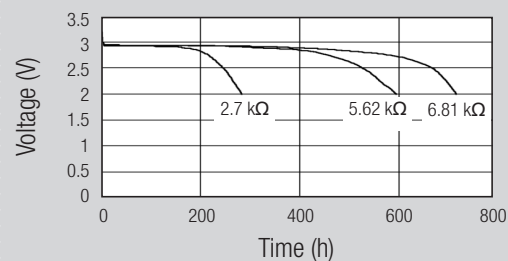


Discharge performance at 23°C

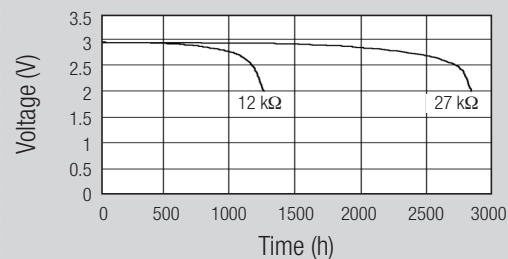


Temperature performance Load 12 kΩ

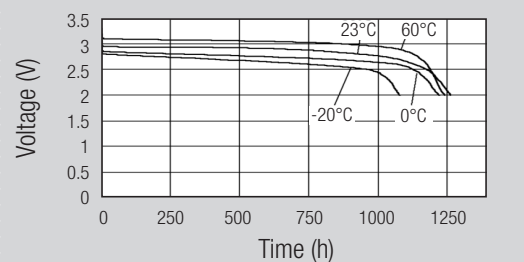


Cell capacity at various loads

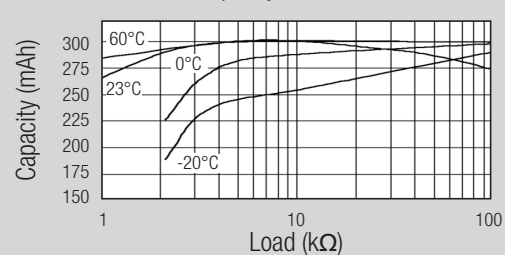


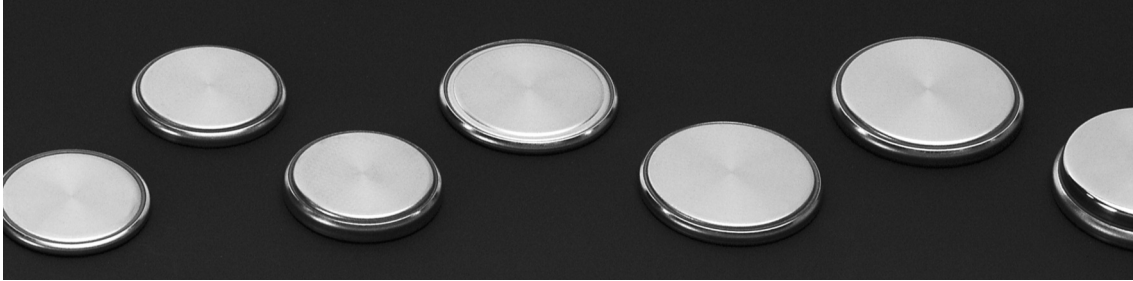


**CR2450N**  Rated capacity: 540 mAh  
Average weight: 5.9 g

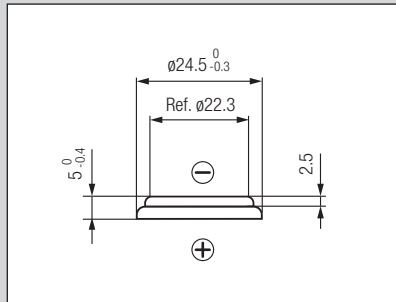


Discharge performance at 23°C

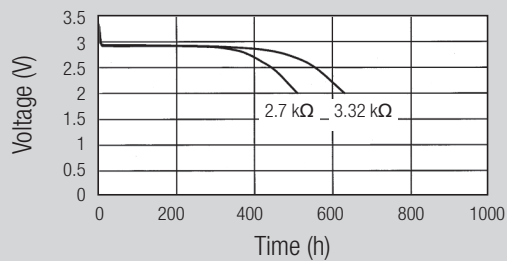


Discharge performance at 23°C

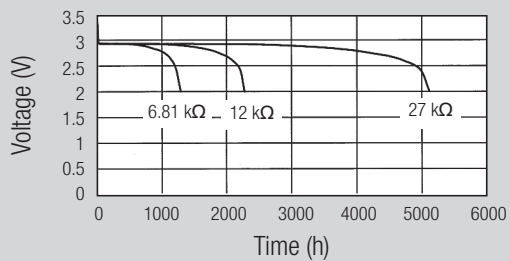


Temperature performance Load 6.81 kΩ

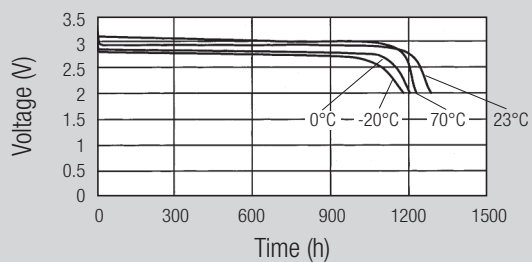


Cell capacity at various loads

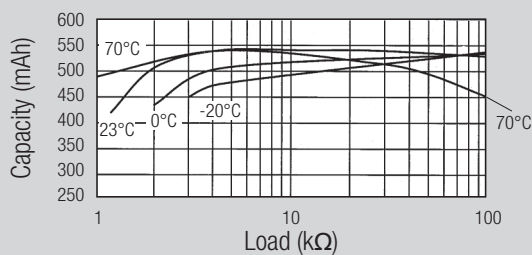


**CR2477N**  \* Rated capacity: 950 mAh  
Average weight: 8.2 g

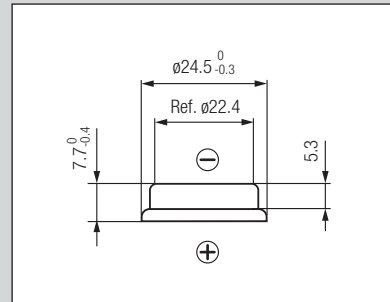


Discharge performance at 23°C

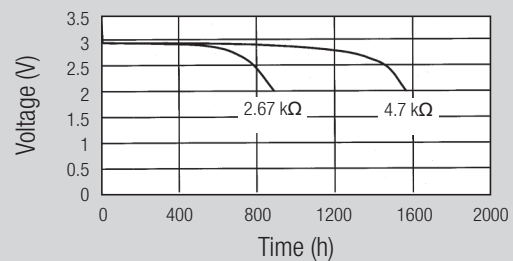


Discharge performance at 23°C

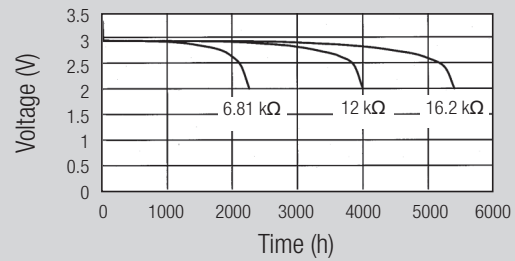

Temperature performance Load 4.7 kΩ

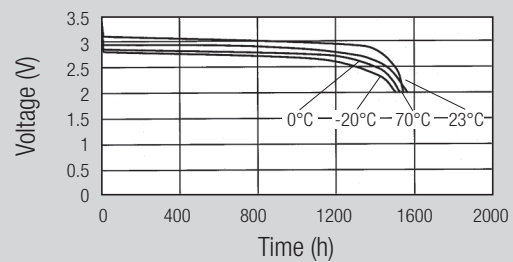

Cell capacity at various loads

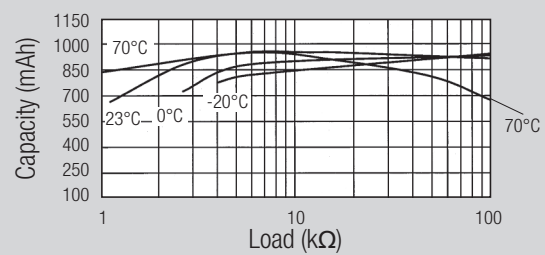

\* Battery is not user replaceable

# Coin Cells


## Packaging options



### Coin cells can be supplied in different packaging

#### Industrial Bulk multi-cell plastic trays

Packaging Code: IB<sup>1</sup>



Industrial Bulk packaging is the standard packaging for manufacturers.

The number of coin cells per plastic tray depends on the respective model. So does the number of plastic trays per shrink pack.

#### Singly packaged coin cells in blistered Card Units

Packaging Code: CU<sup>2</sup>

Card Unit packaging is e.g. used in replacement and retail business. There is one coin cell in a Card Unit, ten Card Units in a small box and ten small boxes in a bigger box.



#### Five coin cells packaged in blistered Tear Strips

Packaging Code: TS



Tear Strip packaging is e.g. used in retail or DIY stores. There are five coin cells in a Tear Strip, four Tear Strips in a small box and five small boxes in a bigger box.

#### Blistered multi-cell Bulk Tray

Packaging Code: BT



Bulk Tray packaging is e.g. used by small internet or catalogue distributors. The number of coin cells per Bulk Tray depends on the respective model. So does the number of plastic trays per cardboard box.

<sup>1</sup> Example: The Renata Part Name of CR2032 coin cells in industrial bulk packaging is "CR2032.IB".

<sup>2</sup> Example: The Renata Part Name of singly packaged CR1616 coin cells in card units is "CR1616.CU".



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.