

General Specifications

Electrical Capacity (Resistive Load)

| | |
|------------------------------|--|
| Power Level (silver): | 3A @ 125V AC for silver contacts |
| Logic Level (gold): | 0.4VA maximum @ 28V AC/DC maximum for gold contacts (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V) Note: Find additional explanation of operating range in Supplement section. |

Other Ratings

| | |
|---------------------------------|--|
| Contact Resistance: | 10 milliohms maximum for silver; 20 milliohms maximum for gold |
| Insulation Resistance: | 1,000 megohms minimum @ 500V DC |
| Dielectric Strength: | 1,000V AC minimum between contacts for 1 minute minimum; 1,500V AC minimum between contacts and case for 1 minute minimum |
| Mechanical Life: | 100,000 operations minimum |
| Electrical Life: | 25,000 operations minimum for silver; 50,000 operations minimum for gold |
| Nominal Operating Force: | Single Pole: 2.35N for Momentary and 2.65N for Alternate Action Double Pole: 2.94N for Momentary and 3.63N for Alternate Action |
| Travel: | Momentary: Pretravel .047" (1.2mm); Overtravel .016" (0.4mm); Total Travel .063" (1.6mm) Alternate: Pretravel .071" (1.8mm); Overtravel .016" (0.4mm); Total Travel .087" (2.2mm) |

Materials & Finishes

| | |
|-----------------------------|--|
| Plunger: | Brass with chrome plating for Momentary; brass with nickel plating for Alternate |
| Bushing: | Brass with nickel plating |
| Frame: | Stainless steel |
| Case: | Melamine phenolic resin (UL94V-0) |
| Movable Contacts: | Copper with silver or gold plating |
| Stationary Contacts: | Silver with silver or gold plating |
| Terminals: | Copper with silver or gold plating |

Environmental Data

| | |
|------------------------------|--|
| Operating Temp Range: | -10°C through +70°C (+14°F through +158°F) |
| Humidity: | 90 ~ 95% humidity for 96 hours @ 40°C (104°F) |
| Vibration: | 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours |
| Shock: | 50G (490m/s ²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction) |

Installation

| | |
|-----------------------------------|---|
| Mounting Torque: | 1.47Nm (13.0 lb•in) for double nut; 0.68Nm (6.0 lb•in) for single nut |
| Cap Installation Force: | 78.5N (17.65 lbf) maximum downward force on actuator |
| Soldering Time & Temp: | Wave Solder (Straight PC): See Profile B in Supplement section. Manual Soldering: See Profile B in Supplement section. |
| Cleaning: | These devices are not process sealed. Hand clean locally using alcohol based solution. |

Standards & Certifications

| | |
|--------------------------------|--|
| Flammability Standards: | UL94V-0 case |
| UL: | File No. E44145 - Recognized only when ordered with marking on switch. Add "/U" or "/CUL" before first dash in part number to order UL recognized switch. All single and double pole models recognized at 3A @ 125V AC. |
| CSA: | File No. 023535_0_000 - Certified only when ordered with marking on switch. Add "/C" before first dash in part number to order CSA certified switch. Single pole solder lug and PC models certified at 3A @ 125V AC; double pole PC models certified at 3A @ 125V AC. |

Distinctive Characteristics

Power and logic level capabilities available to suit varying applications.

Bushing and snap-in mount versions available; snap-in models offer many style and color choices to enhance front panel appearance.

Light touch actuation.

High torque bushing prevents rotation and separation from metal frame during installation.


Stainless steel frame resists corrosion.

Case of heat resistant resin meets UL 94V-0 flammability rating.



Higher insulating barriers protect against crossover in double pole devices.

1,500V dielectric strength between contacts and case is accomplished by clinching the frame away from the terminals.

Epoxy sealed terminals prevent entry of solder flux and other contaminants.

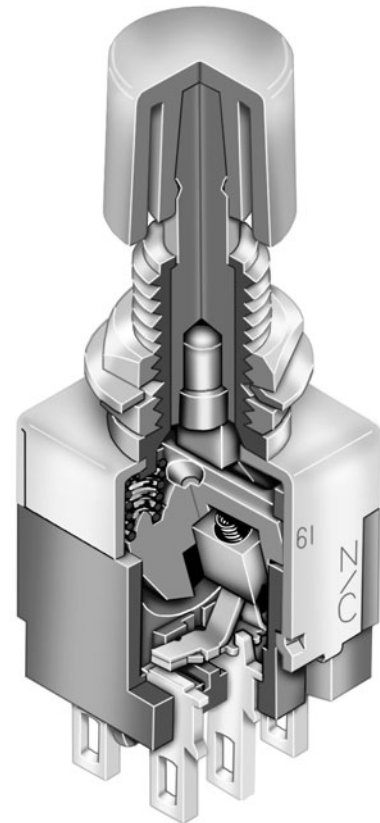

Actual Size

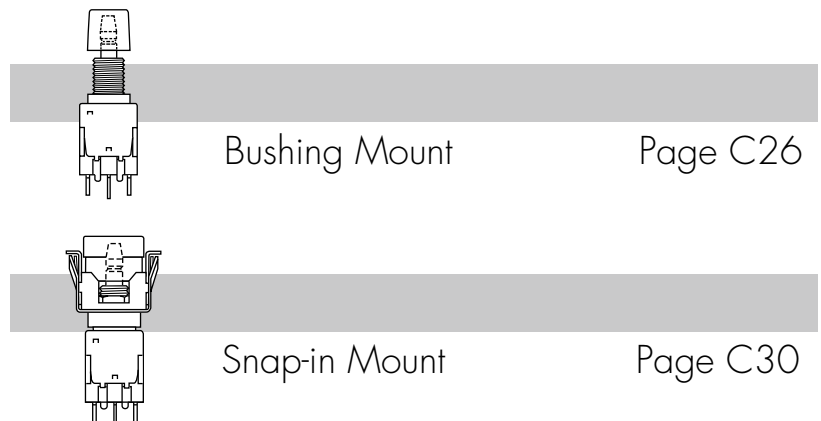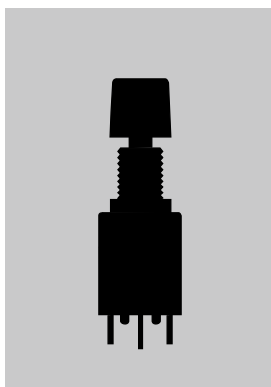

- Toggle
- Rockers
- Pushbuttons**
- Illuminated PB
- Programmable
- Keylocks
- Rotaries
- Slides
- Tactiles
- Tilt
- Touch
- Indicators
- Accessories
- Supplement

TYPICAL SWITCH ORDERING EXAMPLE

EB20

65

B

F

Poles & Circuits

| | | | |
|-----------|------|----|------|
| 11 | SPDT | ON | (ON) |
| 65 | SPDT | ON | ON |
| 61 | DPDT | ON | (ON) |
| 85 | DPDT | ON | ON |

() = Momentary

Caps

| | |
|----------|---------------------|
| B | .315" (8.0mm) Dia. |
| C | .394" (10.0mm) Dia. |

Contacts, Ratings, & Terminals

| | |
|----------------|---|
| No Code | Silver Contacts; Solder Lug Terminals* 3A @ 125V AC |
| G | Gold Contacts; Solder Lug Terminals* 0.4VA max @ 28V AC/DC max |
| P | Silver Contacts; Straight PC Terminals; 3A @ 125V AC |
| PG | Gold Contacts; Straight PC Terminals 0.4VA max @ 28V AC/DC max |

Colors

| | |
|----------|--------|
| A | Black |
| B | White |
| C | Red |
| E | Yellow |
| F | Green |
| G | Blue |
| H | Gray |

IMPORTANT:




Switches are supplied without UL, cULus & CSA marking unless specified. **UL, cULus & CSA recognized only when ordered with marking on the switch.** Specific models, ratings, & ordering instructions are noted on General Specifications page.







* Wire harness & cable assemblies offered only in Americas

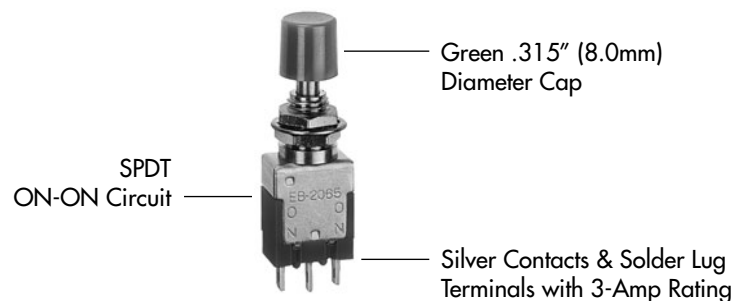DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

EB2065-BF



POLES & CIRCUITS

| Pole | Model | Plunger Position () = Momentary | | Connected Terminals | | Throw & Switch Schematics |
|------|------------------|--|---|--|---|---|
| | | Normal  Keyway | Down  | Normal  Keyway | Down  | |
| SP | EB2011 EB2065 | ON ON | (ON) ON | 2-3 | 2-1 | SPDT  |
| DP | EB2061 EB2085 | ON ON | (ON) ON | 2-3 5-6 | 2-1 5-4 | DPDT  |

Note: Terminal numbers are not actually on the switch.

CONTACT MATERIALS, RATINGS, & TERMINALS



**Solder Lug
Silver Contacts**

Power Level

3A @ 125V AC




**Solder Lug
Gold Contacts**

Logic Level

0.4VA max @ 28V AC/DC max

Complete explanation of operating range in Supplement section.



**Straight PC
Silver Contacts**

Power Level

3A @ 125V AC




**Straight PC
Gold Contacts**

Logic Level

0.4VA max @ 28V AC/DC max



Complete explanation of operating range in Supplement section.



PCB Footprints

Single Pole

Double Pole



Toggles
Rockers
Pushbuttons
Illuminated PB
Programmable
Keylocks
Rotaries
Slides
Tactiles
Tilt
Touch
Indicators
Accessories
Supplement


CAPS & COLORS

B AT443
.315" (8.0mm) Diameter Snap-on Cap

C AT442
.394" (10.0mm) Diameter Snap-on Cap


Cap Colors Available:

- | | |
|-----------------|----------------|
| A Black | F Green |
| B White | G Blue |
| C Red | H Gray |
| E Yellow | |



Cap Colors Available:

- | | |
|-----------------|----------------|
| A Black | F Green |
| B White | G Blue |
| C Red | H Gray |
| E Yellow | |




Cap Material: Polycarbonate Finish: Glossy


Cap Material: Polycarbonate Finish: Glossy

Plunger Extension


Due to a difference in plunger lengths on the momentary and alternate action models, cap distance from top of bushing varies.




Momentary Plunger Length



Momentary Cap Location



Alternate Plunger Length



Alternate Cap Location




TYPICAL SWITCH DIMENSIONS

Solder Lug

Single Pole



EB2011-BA


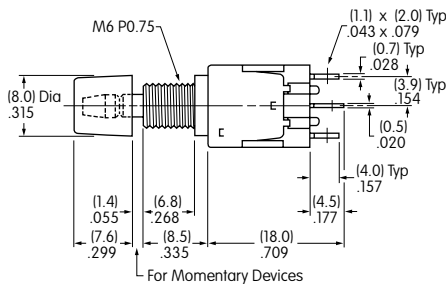



Solder Lug

Double Pole




EB2061-BA

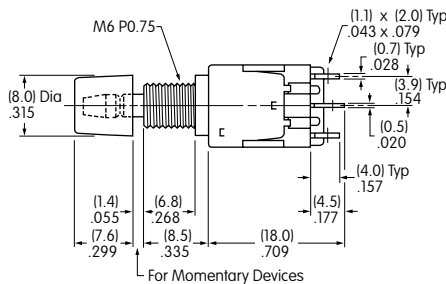

HARDWARE

Installation/Assembly

- 2 AT513M Metric Hexagon Nuts
- 1 AT509 Internal Tooth Lockwasher





Optional Hardware:
AT507M Metric Locking Ring

Note: Cap must be snapped on after the switch is mounted into the panel.

Standard Hardware



AT513M Metric Hexagon Nut

Material:
Brass with
Nickel Plating



AT509 Lockwasher


Material:
Steel with
Zinc/Chromate



Optional Hardware


AT507M Metric Locking Ring

Material:
Steel with
Zinc/Chromate




PANEL CUTOUTS & THICKNESSES

Metric Bushing




With Standard Hardware




Maximum Effective
Panel Thickness:
.118" (3.0mm)

With Standard Hardware & Optional Locking Ring



Maximum Effective
Panel Thickness:
.055" (1.4mm)

Without Bottom Hex Nut



Maximum Effective
Panel Thickness:
.185" (4.7mm)

See Accessories & Hardware section for optional Conical Nuts:
AT512M used with cap AT443 and AT512CM used with cap AT442.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.