

# NTTFS4937N

## Power MOSFET

30 V, 75 A, Single N-Channel,  $\mu$ 8FL

### Features

- Low  $R_{DS(on)}$  to Minimize Conduction Losses
- Low Capacitance to Minimize Driver Losses
- Optimized Gate Charge to Minimize Switching Losses
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### Applications

- Low-Side DC-DC Converters
- Power Load Switch
- Notebook Battery Management
- Motor Control

### MAXIMUM RATINGS ( $T_J = 25^\circ\text{C}$ unless otherwise stated)

| Parameter                                                                                                                                                                                                  |                                                            |                            | Symbol            | Value       | Unit               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|----------------------------|-------------------|-------------|--------------------|
| Drain-to-Source Voltage                                                                                                                                                                                    |                                                            |                            | $V_{DSS}$         | 30          | V                  |
| Gate-to-Source Voltage                                                                                                                                                                                     |                                                            |                            | $V_{GS}$          | $\pm 20$    | V                  |
| Continuous Drain Current $R_{\theta JA}$ (Note 1)                                                                                                                                                          | Steady State                                               | $T_A = 25^{\circ}\text{C}$ | $I_D$             | 17          | A                  |
|                                                                                                                                                                                                            |                                                            | $T_A = 85^{\circ}\text{C}$ |                   | 12          |                    |
| Power Dissipation $R_{\theta JA}$ (Note 1)                                                                                                                                                                 |                                                            | $T_A = 25^{\circ}\text{C}$ | $P_D$             | 2.24        | W                  |
| Continuous Drain Current $R_{\theta JA} \leq 10$ s (Note 1)                                                                                                                                                |                                                            | $T_A = 25^{\circ}\text{C}$ | $I_D$             | 25          | A                  |
|                                                                                                                                                                                                            |                                                            | $T_A = 85^{\circ}\text{C}$ |                   | 18          |                    |
| Power Dissipation $R_{\theta JA} \leq 10$ s (Note 1)                                                                                                                                                       |                                                            | $T_A = 25^{\circ}\text{C}$ | $P_D$             | 4.7         | W                  |
| Continuous Drain Current $R_{\theta JA}$ (Note 2)                                                                                                                                                          |                                                            | $T_A = 25^{\circ}\text{C}$ | $I_D$             | 11          | A                  |
|                                                                                                                                                                                                            |                                                            | $T_A = 85^{\circ}\text{C}$ |                   | 8.0         |                    |
| Power Dissipation $R_{\theta JA}$ (Note 2)                                                                                                                                                                 |                                                            | $T_A = 25^{\circ}\text{C}$ | $P_D$             | 0.86        | W                  |
| Continuous Drain Current $R_{\theta JC}$ (Note 1)                                                                                                                                                          |                                                            | $T_C = 25^{\circ}\text{C}$ | $I_D$             | 75          | A                  |
|                                                                                                                                                                                                            |                                                            | $T_C = 85^{\circ}\text{C}$ |                   | 54          |                    |
| Power Dissipation $R_{\theta JC}$ (Note 1)                                                                                                                                                                 |                                                            | $T_C = 25^{\circ}\text{C}$ | $P_D$             | 43.1        | W                  |
| Pulsed Drain Current                                                                                                                                                                                       | $T_A = 25^{\circ}\text{C}$ , $t_p = 10\text{ }\mu\text{s}$ | $I_{DM}$                   | 230               | A           |                    |
| Operating Junction and Storage Temperature                                                                                                                                                                 |                                                            |                            | $T_J$ , $T_{stg}$ | -55 to +150 | $^{\circ}\text{C}$ |
| Source Current (Body Diode)                                                                                                                                                                                |                                                            |                            | $I_S$             | 48          | A                  |
| Drain to Source dV/dt                                                                                                                                                                                      |                                                            |                            | dV/dt             | 6.0         | V/ns               |
| Single Pulse Drain-to-Source Avalanche Energy ( $T_J = 25^{\circ}\text{C}$ , $V_{DD} = 50\text{ V}$ , $V_{GS} = 10\text{ V}$ , $I_L = 37\text{ A}_{pk}$ , $L = 0.1\text{ mH}$ , $R_G = 25\text{ }\Omega$ ) |                                                            |                            | $E_{AS}$          | 68.5        | mJ                 |
| Lead Temperature for Soldering Purposes (1/8" from case for 10 s)                                                                                                                                          |                                                            |                            | $T_L$             | 260         | $^{\circ}\text{C}$ |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

1. Surface-mounted on FR4 board using 1 sq-in pad, 1 oz Cu.
2. Surface-mounted on FR4 board using the minimum recommended pad size.




ON Semiconductor®

<http://onsemi.com>


| $V_{(BR)DSS}$ | $R_{DS(on)}$ MAX       | $I_D$ MAX |
|---------------|------------------------|-----------|
| 30 V          | 4.5 m $\Omega$ @ 10 V  | 75 A      |
|               | 7.0 m $\Omega$ @ 4.5 V |           |

### N-Channel MOSFET



**WDFN8**  
( $\mu$ 8FL)  
CASE 511AB

### MARKING DIAGRAM



4937 = Specific Device Code  
A = Assembly Location  
Y = Year  
WW = Work Week  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

### ORDERING INFORMATION

| Device        | Package         | Shipping†        |
|---------------|-----------------|------------------|
| NTTFS4937NTAG | WDFN8 (Pb-Free) | 1500/Tape & Reel |
| NTTFS4937NTWG | WDFN8 (Pb-Free) | 5000/Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

# THERMAL RESISTANCE MAXIMUM RATINGS

| Parameter                                       | Symbol          | Value | Unit                 |
|-------------------------------------------------|-----------------|-------|----------------------|
| Junction-to-Case (Drain)                        | $R_{\theta JC}$ | 2.9   | $^{\circ}\text{C/W}$ |
| Junction-to-Ambient – Steady State (Note 3)     | $R_{\theta JA}$ | 55.9  |                      |
| Junction-to-Ambient – Steady State (Note 4)     | $R_{\theta JA}$ | 144.6 |                      |
| Junction-to-Ambient – ( $t \leq 10$ s) (Note 3) | $R_{\theta JA}$ | 26.4  |                      |

3. Surface-mounted on FR4 board using 1 sq-in pad, 1 oz Cu.

4. Surface-mounted on FR4 board using the minimum recommended pad size (40 mm<sup>2</sup>, 1 oz. Cu).

# ELECTRICAL CHARACTERISTICS ( $T_J = 25^{\circ}\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------|--------|----------------|-----|-----|-----|------|
|-----------|--------|----------------|-----|-----|-----|------|

## OFF CHARACTERISTICS

|                                                           |                   |                                                     |                             |    |           |                        |
|-----------------------------------------------------------|-------------------|-----------------------------------------------------|-----------------------------|----|-----------|------------------------|
| Drain-to-Source Breakdown Voltage                         | $V_{(BR)DSS}$     | $V_{GS} = 0\text{ V}, I_D = 250\text{ }\mu\text{A}$ | 30                          |    |           | V                      |
| Drain-to-Source Breakdown Voltage Temperature Coefficient | $V_{(BR)DSS}/T_J$ |                                                     |                             | 15 |           | mV/ $^{\circ}\text{C}$ |
| Zero Gate Voltage Drain Current                           | $I_{DSS}$         | $V_{GS} = 0\text{ V}, V_{DS} = 24\text{ V}$         | $T_J = 25^{\circ}\text{C}$  |    | 1.0       | $\mu\text{A}$          |
|                                                           |                   |                                                     | $T_J = 125^{\circ}\text{C}$ |    | 10        |                        |
| Gate-to-Source Leakage Current                            | $I_{GSS}$         | $V_{DS} = 0\text{ V}, V_{GS} = \pm 20\text{ V}$     |                             |    | $\pm 100$ | nA                     |

## ON CHARACTERISTICS (Note 5)

|                                            |                  |                                                 |                     |     |     |                        |
|--------------------------------------------|------------------|-------------------------------------------------|---------------------|-----|-----|------------------------|
| Gate Threshold Voltage                     | $V_{GS(TH)}$     | $V_{GS} = V_{DS}, I_D = 250\text{ }\mu\text{A}$ | 1.2                 | 1.6 | 2.2 | V                      |
| Negative Threshold Temperature Coefficient | $V_{GS(TH)}/T_J$ |                                                 |                     | 4.0 |     | mV/ $^{\circ}\text{C}$ |
| Drain-to-Source On Resistance              | $R_{DS(on)}$     | $V_{GS} = 10\text{ V}$                          | $I_D = 20\text{ A}$ |     | 3.4 | m $\Omega$             |
|                                            |                  |                                                 | $I_D = 10\text{ A}$ |     | 3.4 |                        |
|                                            |                  | $V_{GS} = 4.5\text{ V}$                         | $I_D = 20\text{ A}$ |     | 4.9 |                        |
|                                            |                  |                                                 | $I_D = 10\text{ A}$ |     | 4.8 |                        |
| Forward Transconductance                   | $g_{FS}$         | $V_{DS} = 1.5\text{ V}, I_D = 15\text{ A}$      |                     | 37  |     | S                      |

## CHARGES AND CAPACITANCES

|                              |              |                                                                  |  |      |  |    |
|------------------------------|--------------|------------------------------------------------------------------|--|------|--|----|
| Input Capacitance            | $C_{iss}$    | $V_{GS} = 0\text{ V}, f = 1.0\text{ MHz}, V_{DS} = 15\text{ V}$  |  | 2540 |  | pF |
| Output Capacitance           | $C_{oss}$    |                                                                  |  | 893  |  |    |
| Reverse Transfer Capacitance | $C_{rss}$    |                                                                  |  | 26   |  |    |
| Total Gate Charge            | $Q_{G(TOT)}$ | $V_{GS} = 4.5\text{ V}, V_{DS} = 15\text{ V}, I_D = 20\text{ A}$ |  | 15.7 |  | nC |
| Threshold Gate Charge        | $Q_{G(TH)}$  |                                                                  |  | 4.0  |  |    |
| Gate-to-Source Charge        | $Q_{GS}$     |                                                                  |  | 7.6  |  |    |
| Gate-to-Drain Charge         | $Q_{GD}$     |                                                                  |  | 1.9  |  |    |
| Total Gate Charge            | $Q_{G(TOT)}$ | $V_{GS} = 10\text{ V}, V_{DS} = 15\text{ V}, I_D = 20\text{ A}$  |  | 35.5 |  | nC |

## SWITCHING CHARACTERISTICS (Note 6)

|                     |              |                                                                                           |  |      |  |    |
|---------------------|--------------|-------------------------------------------------------------------------------------------|--|------|--|----|
| Turn-On Delay Time  | $t_{d(on)}$  | $V_{GS} = 4.5\text{ V}, V_{DS} = 15\text{ V}, I_D = 15\text{ A}, R_G = 3.0\text{ }\Omega$ |  | 13.9 |  | ns |
| Rise Time           | $t_r$        |                                                                                           |  | 21.2 |  |    |
| Turn-Off Delay Time | $t_{d(off)}$ |                                                                                           |  | 21.2 |  |    |
| Fall Time           | $t_f$        |                                                                                           |  | 7.4  |  |    |

5. Pulse Test: pulse width = 300  $\mu\text{s}$ , duty cycle  $\leq 2\%$ .

6. Switching characteristics are independent of operating junction temperatures.

# NTTFS4937N

## ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------|--------|----------------|-----|-----|-----|------|
|-----------|--------|----------------|-----|-----|-----|------|

### SWITCHING CHARACTERISTICS (Note 6)

|                     |              |                                                                                         |  |      |  |    |
|---------------------|--------------|-----------------------------------------------------------------------------------------|--|------|--|----|
| Turn-On Delay Time  | $t_{d(on)}$  | $V_{GS} = 10\text{ V}, V_{DS} = 15\text{ V},$<br>$I_D = 15\text{ A}, R_G = 3.0\ \Omega$ |  | 9.8  |  | ns |
| Rise Time           | $t_r$        |                                                                                         |  | 19.8 |  |    |
| Turn-Off Delay Time | $t_{d(off)}$ |                                                                                         |  | 28.8 |  |    |
| Fall Time           | $t_f$        |                                                                                         |  | 4.0  |  |    |

### DRAIN-SOURCE DIODE CHARACTERISTICS

|                         |          |                                                                                   |                           |  |      |     |    |
|-------------------------|----------|-----------------------------------------------------------------------------------|---------------------------|--|------|-----|----|
| Forward Diode Voltage   | $V_{SD}$ | $V_{GS} = 0\text{ V},$<br>$I_S = 20\text{ A}$                                     | $T_J = 25^\circ\text{C}$  |  | 0.85 | 1.1 | V  |
|                         |          |                                                                                   | $T_J = 125^\circ\text{C}$ |  | 0.72 |     |    |
| Reverse Recovery Time   | $t_{RR}$ | $V_{GS} = 0\text{ V}, dI_S/dt = 100\text{ A}/\mu\text{s},$<br>$I_S = 20\text{ A}$ |                           |  | 38.5 |     | ns |
| Charge Time             | $t_a$    |                                                                                   |                           |  | 20.2 |     |    |
| Discharge Time          | $t_b$    |                                                                                   |                           |  | 18.2 |     |    |
| Reverse Recovery Charge | $Q_{RR}$ |                                                                                   |                           |  | 33   |     | nC |

### PACKAGE PARASITIC VALUES

|                   |       |                          |  |       |     |          |
|-------------------|-------|--------------------------|--|-------|-----|----------|
| Source Inductance | $L_S$ | $T_A = 25^\circ\text{C}$ |  | 0.38  |     | nH       |
| Drain Inductance  | $L_D$ |                          |  | 0.054 |     |          |
| Gate Inductance   | $L_G$ |                          |  | 1.3   |     |          |
| Gate Resistance   | $R_G$ |                          |  | 1.1   | 2.0 | $\Omega$ |

5. Pulse Test: pulse width = 300  $\mu\text{s}$ , duty cycle  $\leq 2\%$ .

6. Switching characteristics are independent of operating junction temperatures.

TYPICAL CHARACTERISTICS

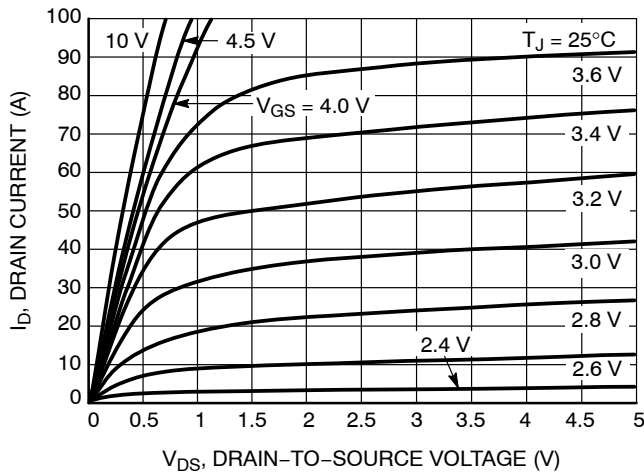


Figure 1. On-Region Characteristics

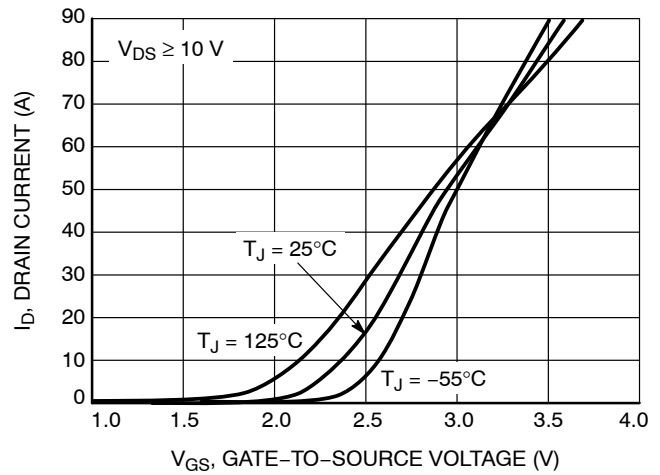


Figure 2. Transfer Characteristics

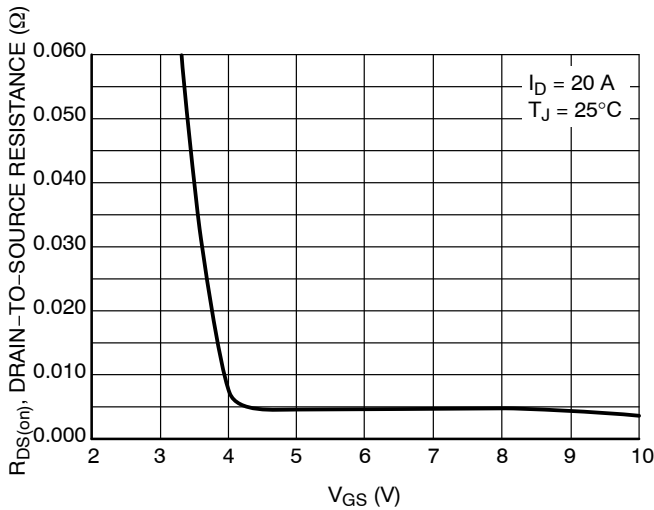


Figure 3. On-Resistance vs.  $V_{GS}$

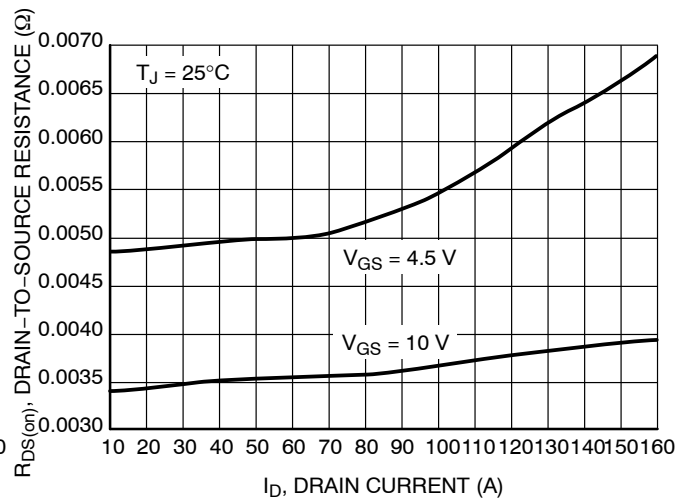


Figure 4. On-Resistance vs. Drain Current and Gate Voltage

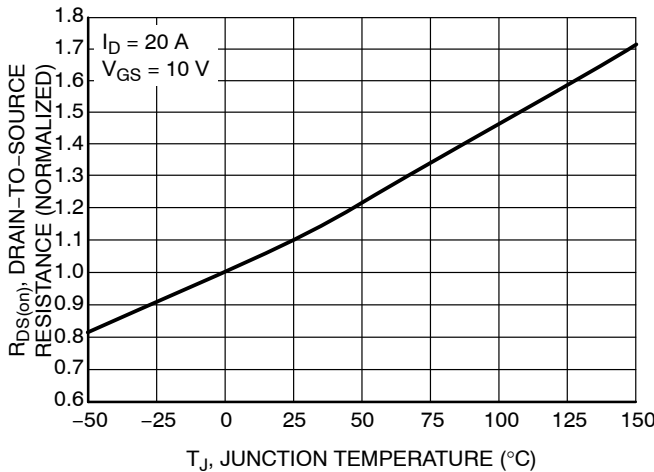


Figure 5. On-Resistance Variation with Temperature

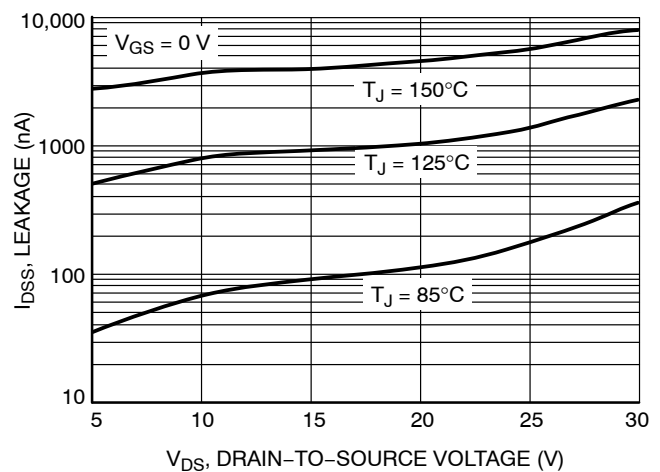


Figure 6. Drain-to-Source Leakage Current vs. Voltage

TYPICAL CHARACTERISTICS

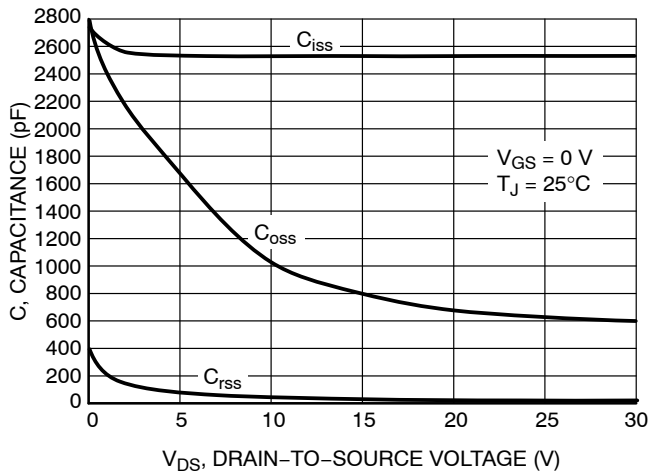


Figure 7. Capacitance Variation

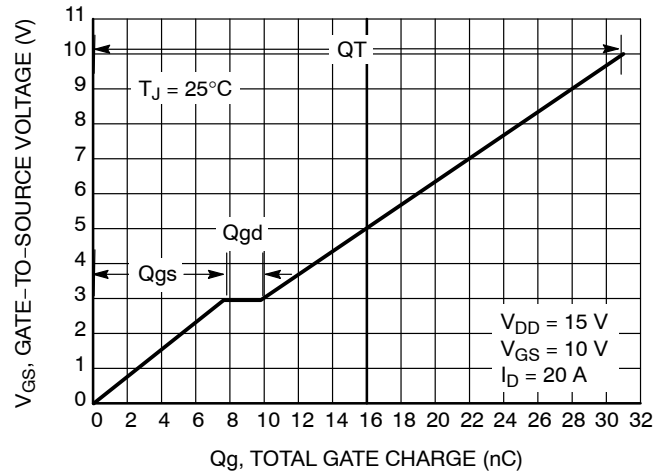


Figure 8. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge

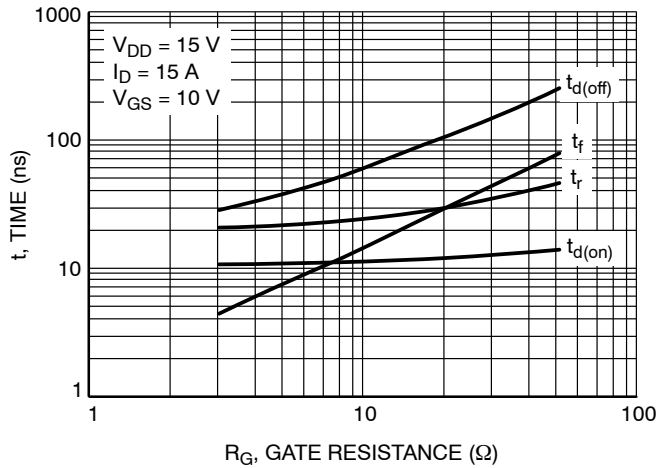


Figure 9. Resistive Switching Time Variation vs. Gate Resistance

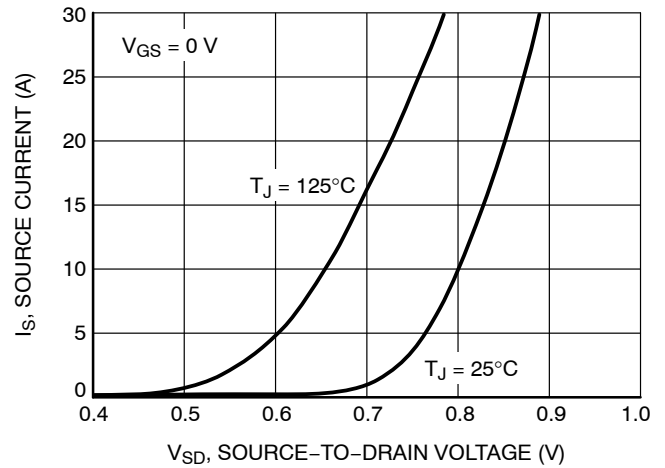


Figure 10. Diode Forward Voltage vs. Current

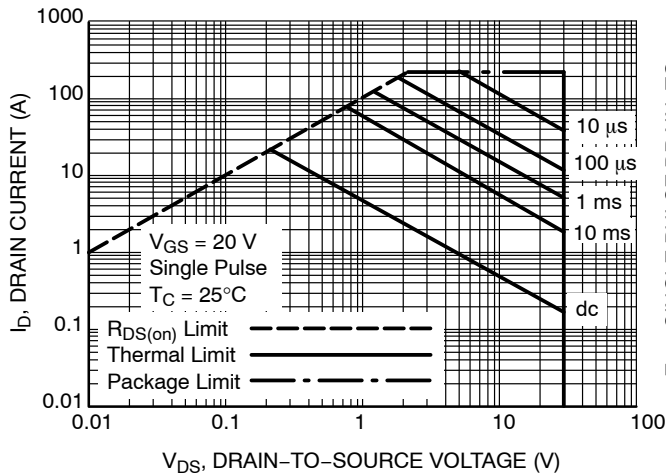


Figure 11. Maximum Rated Forward Biased Safe Operating Area

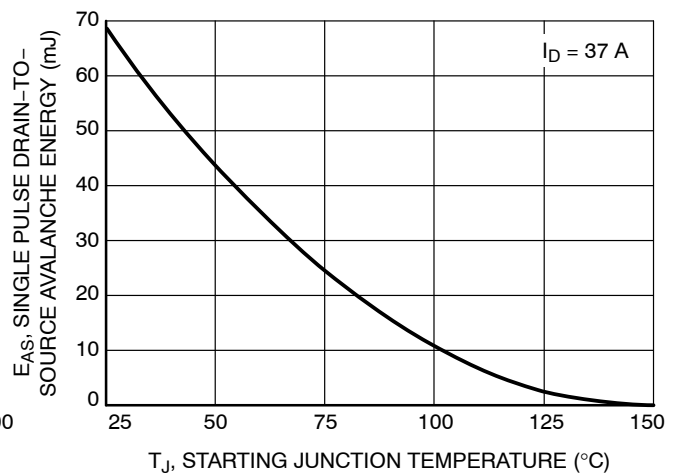


Figure 12. Maximum Avalanche Energy vs. Starting Junction Temperature

# NTTFS4937N

## TYPICAL CHARACTERISTICS

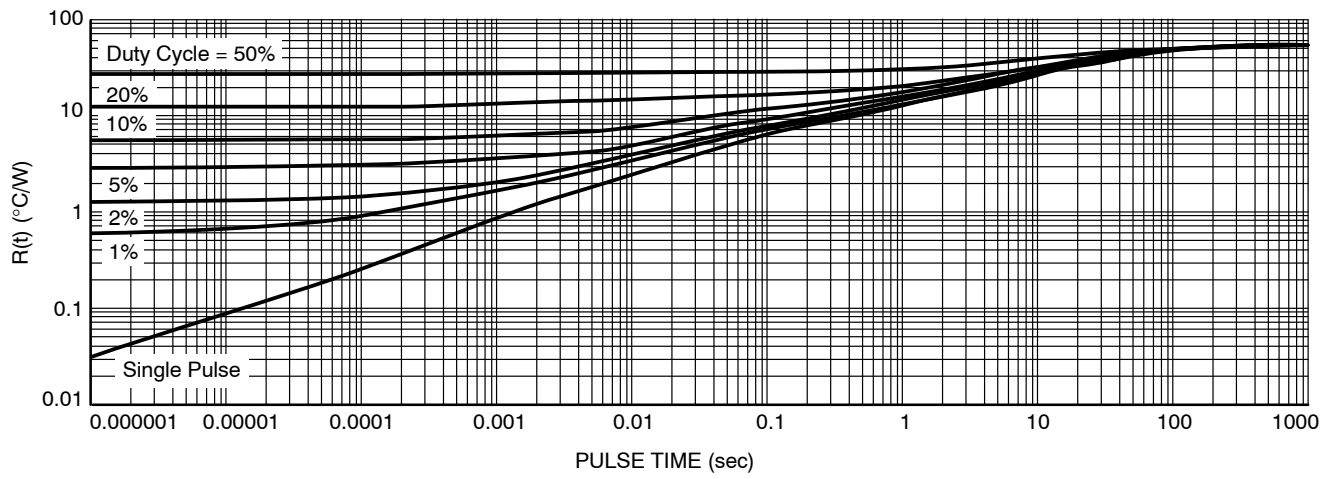


Figure 13. Thermal Response

NTTFS4937N/D



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.