


## DC/DC Converter

## THN 15N Series, 15 Watt

- 15 Watt converter in a compact 1" x 1" metal package
- Wide 2:1 input voltage 9-18, 18-36, 36-75 VDC
- Internal EN 55032 class A filter
- Operating temperature range -40 to +70 °C without derating
- Low no-load power consumption 96 – 336 mW
- High efficiency up to 91%
- I/O-isolation voltage 1600 VDC
- Protection against overload, overvoltage and short circuit
- Remote On/Off and Trim function
- 3-year product warranty



The THN 15N series is the latest generation of high performance 15 Watt DC/DC converters and comes in an encapsulated, shielded 1" x 1" x 0.4" metal package. The new and improved design allows to fully integrate an EN 55032 class A filter and greatly reduces the no-load power consumption (96-336 mW).

Advanced circuit design and a high efficiency of up to 91% enable the THN 15N to operate in a temperature range of -40°C to +70°C without derating. All models have a wide 2:1 input voltage range and precisely regulated, isolated output voltages. Further features include remote On/Off and trim able outputs.

Together with the latest IT safety certifications (UL 62368-1) typical applications for these converters are mobile equipment, instrumentation, distributed power architectures in communication and industrial electronics and everywhere where space on PCB is critical.

### Models

Order code	Input voltage	Output voltage (single outputs: adjustable)	Output current max.	Efficiency typ.
THN 15-1210N	9 - 18 VDC (nominal 12 VDC)	3.3 VDC	4500 mA	88 %
THN 15-1211N		5 VDC	3000 mA	90 %
THN 15-1212N		12 VDC	1300 mA	89 %
THN 15-1213N		15 VDC	1000 mA	90 %
THN 15-1215N		24 VDC	625 mA	91 %
THN 15-1221N		±5 VDC	±1500 mA	86 %
THN 15-1222N		±12 VDC	±625 mA	89 %
THN 15-1223N		±15 VDC	±500 mA	90 %
THN 15-1225N		±24 VDC	±315 mA	90 %
THN 15-2410N		18 - 36 VDC (nominal 24 VDC)	3.3 VDC	4500 mA
THN 15-2411N	5 VDC		3000 mA	90 %
THN 15-2412N	12 VDC		1300 mA	89 %
THN 15-2413N	15 VDC		1000 mA	90 %
THN 15-2415N	24 VDC		625 mA	91 %
THN 15-2421N	±5 VDC		±1500 mA	86 %
THN 15-2422N	±12 VDC		±625 mA	90 %
THN 15-2423N	±15 VDC		±500 mA	90 %
THN 15-2425N	±24 VDC		±315 mA	90 %
THN 15-4810N	36 - 75 VDC (nominal 48 VDC)		3.3 VDC	4500 mA
THN 15-4811N		5 VDC	3000 mA	89 %
THN 15-4812N		12 VDC	1300 mA	89 %
THN 15-4813N		15 VDC	1000 mA	89 %
THN 15-4815N		24 VDC	625 mA	90 %
THN 15-4821N		±5 VDC	±1500 mA	85 %
THN 15-4822N		±12 VDC	±625 mA	89 %
THN 15-4823N		±15 VDC	±500 mA	89 %
THN 15-4825N		±24 VDC	±315 mA	89 %

## Input Specifications

Input current at no load	12 Vin models: 10 mA typ. 24 Vin models: 8 mA typ. 48 Vin models: 7 mA typ.	
Surge voltage (1 s max.)	12 Vin models: 25 VDC max. 24 Vin models: 50 VDC max. 48 Vin models: 100 VDC max.	
Start up voltage	12 Vin models: 9 VDC (or lower) 24 Vin models: 18 VDC (or lower) 48 Vin models: 36 VDC (or lower)	
Under voltage shut down	12 Vin models: 7.5 VDC min. 24 Vin models: 15.5 VDC min. 48 Vin models: 32.5 VDC min.	
Input filter	internal Pi type	
Recommended input fuse	12 Vin models: 3.15 A (slow blow type) 24 Vin models: 1.6 A (slow blow type) 48 Vin models: 0.8 A (slow blow type)	
Remote On/Off	<ul style="list-style-type: none"> <li>– On</li> <li>– Off</li> <li>– Input current of Remote Ctrl. pin</li> <li>– Remote off input current</li> </ul>	Open or 3 – 15 VDC Short or 0 – 1.2 VDC –0.5 to +1.0 mA 1.5 mA typ.

## Output Specifications

Voltage adjustability	– Single output	15 & 24 Vout models: –10 to +20 % other single output models: –10 to +10 %
Voltage set accuracy		±1 % max.
Regulation	<ul style="list-style-type: none"> <li>– Input variation (Vin min. to Vin max.)</li> <li>– Load variation (0 – 100 %)</li> <li>– Cross regulation</li> </ul>	single output: 0.2 % max. dual output: 0.5 % max. single output: 0.2 % max. dual output: 1 % max. (balanced load) dual output: 5 % max. (asymmetrical load 25 % / 100 %)
Temperature coefficient		±0.02 %/K max.
Ripple and noise (20 MHz Bandwidth)		3.3 & 5 Vout models: 75 mVp-p typ. (10uF/6.3V X7R MLCC, each output) 12 & 15 Vout models: 100 mVp-p typ. (1uF/25V X7R MLCC, each output) 24 Vout models: 125 mVp-p typ. (2.2uF/50V X7R MLCC, each output)
Start up time (constant resistive load)		40 ms max.
Transient response time (25% load step change)		250 µs typ.
Over voltage protection		3.3 Vout models: 3.7 – 5.4 VDC 5 Vout models: 5.6 – 7.0 VDC 12 Vout models: 13.5 – 19.6 VDC 15 Vout models: 18.3 – 22.0 VDC 24 Vout models: 29.1 – 32.5 VDC
Current limitation		150 % typ. of Iout max.
Short circuit protection		Continuous, automatic recovery
Capacitive load	<ul style="list-style-type: none"> <li>– Single output</li> <li>– Dual output</li> </ul>	3.3 Vout models: 5200 µF max. 5 Vout models: 3600 µF max. 12 Vout models: 600 µF max. 15 Vout models: 500 µF max. 24 Vout models: 200 µF max. ±5 Vout models: 1500 µF max. (each output) ±12 Vout models: 360 µF max. (each output) ±15 Vout models: 250 µF max. (each output) ±24 Vout models: 100 µF max. (each output)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

## General Specifications

Temperature ranges	<ul style="list-style-type: none"> <li>– Operating (natural convection: 20 LFM, 0.1 m/s)</li> <li>– Case temperature</li> <li>– Storage temperature</li> </ul>	–40°C to +105°C +105°C max. –55°C to +125°C
Derating	Please refer to Application note:	Depending on model <a href="http://www.tracopower.com/overview/thn15n">www.tracopower.com/overview/thn15n</a>
Thermal Impedance		17 K/W
Humidity (non condensing)		5 – 95 % rel H
Isolation voltage	<ul style="list-style-type: none"> <li>– Input to output (60 s)</li> <li>– Input/output to case</li> </ul>	1'600 VDC 1'000 VDC
Isolation resistance		1 GOhm min.
Isolation capacitance		2000 pF max.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		1'670'000 h
Switching frequency	3.3 & 5 Vout models: other output models:	220 – 270 kHz (pulse width modulation) 270 – 330 kHz (pulse width modulation)
Safety standards /approvals	<ul style="list-style-type: none"> <li>– Certification documents</li> </ul>	IEC/EN/UL 62368-1 <a href="http://www.tracopower.com/overview/thn15n">www.tracopower.com/overview/thn15n</a>
EMC emissions	<ul style="list-style-type: none"> <li>– Application note for filter class B proposal</li> </ul>	EN 55032, EN 55011 class A without external components class B with external components <a href="http://www.tracopower.com/overview/thn15n">www.tracopower.com/overview/thn15n</a>
EMC immunity	<ul style="list-style-type: none"> <li>– ESD (electrostatic discharge)</li> <li>– Radiated immunity</li> <li>– Fast transient (with external components)</li> <li>– Surge (with external components) Application note for Fast transient / surge filter</li> <li>– Conducted immunity</li> <li>– Magnetic field immunity</li> </ul>	EN 55024 EN 61000-4-2, air ±8 kV, contact ±6 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±2 kV perf. criteria A <a href="http://www.tracopower.com/overview/thn15n">www.tracopower.com/overview/thn15n</a> EN 61000-4-6, 10 Vrms, perf. criteria A EN 61000-4-8, 100 A/m continuous, 1000 A/m 1 s, perf. criteria A
Shock, vibration and thermal shock		acc. MIL-STD-810F
Environmental compliance	<ul style="list-style-type: none"> <li>– Reach</li> <li>– RoHS</li> </ul>	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a> RoHS directive 2011/65/EU


## Physical Specifications

Casing material	Copper
Base material	FR4 PCB
Potting material	Silicone (UL 94V-0 rated)
Package weight	16.5 g (0.58 oz)

**Supporting Documents:** [www.tracopower.com/overview/thn15n](http://www.tracopower.com/overview/thn15n)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**Outline Dimensions**

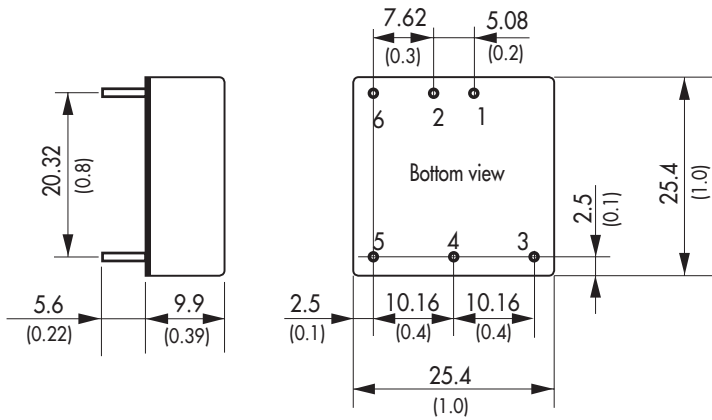

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	+Vout	+Vout
4	Trim	Common
5	-Vout	-Vout
6	Remote On/Off	Remote On/Off

Dimensions in mm, ( ) = Inch  
 Pin diameter  $\varnothing$  1.0 (0.04)  
 Tolerances: x.x  $\pm 0.5$  ( $\pm 0.02$ )  
 x.xx  $\pm 0.25$  ( $\pm 0.01$ )  
 Pin pitch tolerance  $\pm 0.25$  ( $\pm 0.01$ )  
 Pin dimension tolerance  $\pm 0.1$  ( $\pm 0.004$ )



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.