

## DC Filter Capacitors



### TYPE ET

These capacitors are manufactured using a mixed dielectric material that consists of polyester/polypropylene film and capacitor tissue. They are impregnated and filled with a mineral oil. The container is a Synthetic Resin Bonded Paper tube sealed at both ends with resin assuring hermetic sealing. The capacitors are terminated with M5 \*12 mm studs or tinned copper wire.

#### Note

- The impregnant used is a non toxic highly refined, purified and inhibited mineral oil.

### APPLICATIONS

The ET range is specifically designed for high voltage filters and can be successfully used in the following applications:

- By-pass
- Coupling
- Filter applications
- X-ray power supplies
- Electrostatic air deainers

### TEMPERATURE RANGE

Temperature range is - 55 °C to + 85 °C. Derating is required for operation at higher temperatures.

### TEMPERATURE COEFFICIENT

Capacitance will increase by 2 % per 100 °C temperature rise.

### CAPACITANCE RANGE

0.0005  $\mu$ F to 2  $\mu$ F. The tolerance is  $\pm$  10 %. Other tolerances are available on request. Nominal values measured at 1 kHz.

### VOLTAGE RANGE

1000  $V_{DC}$  to 70 000  $V_{DC}$

### RIPPLE

The sum of the peak ripple voltage and the DC voltage should not exceed the rated voltage. Refer to graph fig.1 for permissible peak-to-peak ripple voltage as a percentage of rated voltage for various frequencies.

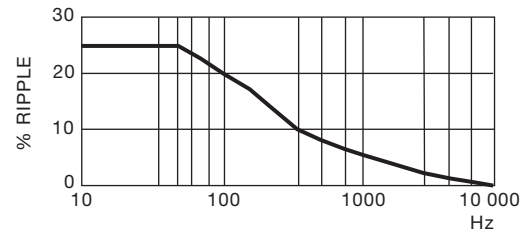


Fig. 1

### POWER FACTOR

The power factor is variable, and is a function of temperature and frequency see fig. 2. Nominal value < 0.5 % at 20 °C

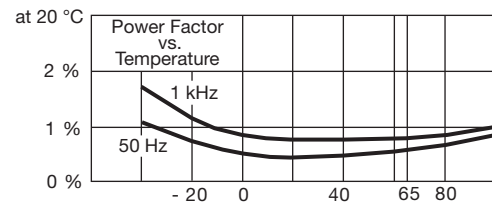


Fig. 2

### DIELECTRIC RESISTANCE

(Parallel resistance) is indicated by the graph of insulance ( $M\Omega \times \mu F$ ) vs temperature fig. 3. The insulance ( $M\Omega \times \mu F$ ) is nominally 10 000 s at + 20 °C. (Measurements taken after 1 minute with an applied voltage of 500 V)

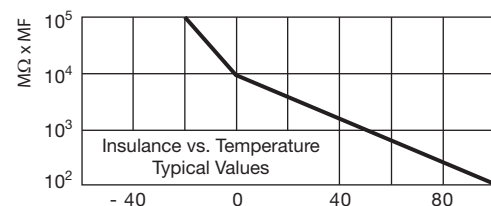


Fig. 3

### LIFE EXPECTANCY

ET type capacitors are designed for a life expectancy of 5000 h at 65 °C. To achieve the same life expectancy at 85 °C derate to 60 % of rated voltage fig. 4.

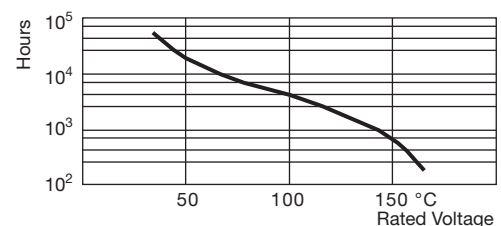


Fig. 4

**TEST VOLTAGE**

Terminal/terminal (Vt/t)

For DC rating &lt; 20 kV

 $V_t/t = 2.0 \times \text{rated voltage } 60 \text{ s}$ 

For DC rating &gt; 20 kV

 $V_t/t = 1.5 \times \text{rated voltage } 60 \text{ s}$ **WEIGHT**


The approximate weight in grams may be calculated by multiplying the volume of the capacitor container by  $1.2 \times 10^{-3}$ .

**TERMINATIONS**

Add suffix W to part No. To indicate wire terminations.

**CAPACITANCE**

Capacitance tolerance of 20 % is standard with those marked.

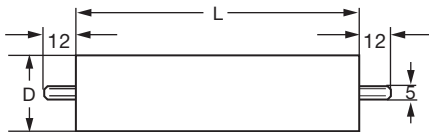**DIMENSIONS** in millimeters

TYPE DESCRIPTION			
PART NUMBER	CAP. [μF]	L [mm]	D [mm]
<b>1000 V<sub>DC</sub> WKG</b>			
ET10-103	0.01 <sup>(1)</sup>	42	17
ET10-203	0.02 <sup>(1)</sup>	42	17
ET10-503	0.05	48	17
ET10-254	0.25	60	22
ET10-504	0.5	70	30
ET10-205	2.0	110	35
<b>1500 V<sub>DC</sub> WKG</b>			
ET15-103	0.01 <sup>(1)</sup>	42	17
ET15-203	0.02 <sup>(1)</sup>	42	20
ET15-254	0.25	60	30
ET15-504	0.5	110	25
ET15-105	1.0	110	35
ET15-205	2.0	110	42
<b>2000 V<sub>DC</sub> WKG</b>			
ET20-103	0.01 <sup>(1)</sup>	48	17
ET20-503	0.05	60	17
ET20-104	0.1	60	22
ET20-254	0.25	60	30
ET20-504	0.5	75	35
<b>3000 V<sub>DC</sub> WKG</b>			
ET30-502	0.005 <sup>(1)</sup>	42	17
ET30-103	0.01 <sup>(1)</sup>	42	20
ET30-203	0.02	48	20
ET30-503	0.05	55	25
ET30-104	0.1	55	30
ET30-254	0.25	60	35
ET30-504	0.5	75	42
ET30-105	1.0	110	42
<b>4000 V<sub>DC</sub> WKG</b>			
ET40-102	0.001 <sup>(1)</sup>	42	17
ET40-502	0.005 <sup>(1)</sup>	42	17
ET40-503	0.05	60	22
ET40-103	0.01	42	20
ET40-104	0.1	60	30
ET40-504	0.5	95	42
<b>5000 V<sub>DC</sub> WKG</b>			
ET50-102	0.001 <sup>(1)</sup>	42	17
ET50-202	0.002 <sup>(1)</sup>	42	17
ET50-502	0.005 <sup>(1)</sup>	42	20
ET50-103	0.01	48	20
ET50-203	0.02	48	22
ET50-503	0.05	60	25
ET50-104	0.1	75	30
ET50-254	0.25	95	35
ET50-504	0.5	110	42

**Notes**<sup>(1)</sup> Capacitance tolerance of 20 % is standard

- Non standard size containers can be supplied on request



TYPE DESCRIPTION			
PART NUMBER	CAP. [μF]	L [mm]	D [mm]
<b>6000 V<sub>DC</sub> WKG</b>			
ET60-102	0.001 <sup>(1)</sup>	55	17
ET60-202	0.002 <sup>(1)</sup>	55	17
ET60-502	0.005 <sup>(1)</sup>	65	17
ET60-103	0.01	65	20
ET60-203	0.02	80	20
ET60-503	0.05	100	25
ET60-104	0.10	100	35
ET60-254	0.25	135	42
<b>8000 V<sub>DC</sub> WKG</b>			
ET80-502	0.005 <sup>(1)</sup>	65	20
ET80-103	0.01	80	20
ET80-503	0.05	105	35
ET80-104	0.10	105	42
ET80-254	0.25	170	42
<b>10 000 V<sub>DC</sub> WKG</b>			
ET100-102	0.001 <sup>(1)</sup>	65	17
ET100-502	0.005 <sup>(1)</sup>	65	22
ET100-103	0.01	80	22
ET100-203	0.02	80	30
ET100-503	0.05	105	35
ET100-104	0.10	170	35
ET100-254	0.25	205	42
<b>12 000 V<sub>DC</sub> WKG</b>			
ET120-202	0.002 <sup>(1)</sup>	95	20
ET120-502	0.005 <sup>(1)</sup>	95	30
ET120-103	0.01	115	30
ET120-203	0.02	115	35
ET120-503	0.05	180	35
ET120-104	0.10	180	42
<b>15 000 V<sub>DC</sub> WKG</b>			
ET150-102	0.001 <sup>(1)</sup>	95	17
ET150-202	0.002 <sup>(1)</sup>	95	20
ET150-502	0.005 <sup>(1)</sup>	110	20
ET150-103	0.01	110	30
ET150-203	0.02	110	35
ET150-503	0.05	150	42
ET150-104	0.10	245	42
<b>20 000 V<sub>DC</sub> WKG</b>			
ET200-102	0.001 <sup>(1)</sup>	115	22
ET200-502	0.005 <sup>(1)</sup>	145	25
ET200-103	0.01	145	30
ET200-203	0.02	195	30
ET200-503	0.05	245	42
ET200-104	0.10	320	42

TYPE DESCRIPTION			
PART NUMBER	CAP. [μF]	L [mm]	D [mm]
<b>25 000 V<sub>DC</sub> WKG</b>			
ET250-501	0.0005 <sup>(1)</sup>	145	17
ET250-102	0.001 <sup>(1)</sup>	145	20
ET250-502	0.005	175	30
ET250-103	0.010	175	35
ET250-503	0.05	300	42
<b>30 000 V<sub>DC</sub> WKG</b>			
ET300-501	0.0005 <sup>(1)</sup>	170	17
ET300-102	0.001 <sup>(1)</sup>	170	20
ET300-202	0.002	170	25
ET300-502	0.005	205	30
ET300-103	0.010	205	35
ET300-203	0.02	280	35
ET300-303	0.03	280	42
<b>40 000 V<sub>DC</sub> WKG</b>			
ET400-102	0.001 <sup>(1)</sup>	210	20
ET400-202	0.002	275	20
ET400-103	0.010	275	42
<b>50 000 V<sub>DC</sub> WKG</b>			
ET500-501	0.0005 <sup>(1)</sup>	275	22
ET500-102	0.001 <sup>(1)</sup>	275	22
ET500-202	0.002	340	22
ET500-502	0.005	340	35
ET500-103	0.010	340	42
<b>60 000 V<sub>DC</sub> WKG</b>			
ET600-102	0.001 <sup>(1)</sup>	330	25
ET600-152	0.0015	330	30

**Notes**<sup>(1)</sup> Capacitance tolerance of 20 % is standard

- Non standard size containers can be supplied on request



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.