

## Q2S SERIES

### Q2S Series - 30A Quarter Brick DC/DC Converter

48V Input

1.5V to 3.3V Output



### APPLICATIONS

- Distributed Power Architectures
- Telecommunications Equipment
- LAN/WAN Applications
- Data Processing Applications

### DESCRIPTION

The Q2S DC/DC converters offer unprecedented performance in the industry-standard Quarter Brick format. This is accomplished through the use of patent pending circuit and packaging techniques to achieve ultra-high efficiency, excellent thermal performance and a very low profile. The Q2S 30 A modules provide exceptional thermal performance. The low profile (<0.30") of the modules and no need for a heatsink minimize airflow shadowing, which enhances cooling for

### FEATURES

- Delivers up to 30 A
- Over 20 A at 200 LFM @ 70°C
- No Heatsink Required
- Low Profile < 8 mm (0.30")
- Light Weight: 27 g (0.95 oz)
- No Minimum Load Required
- Load Capacitance: up to 30,000  $\mu$ F
- Start-up into Pre-biased Output
- Fixed-frequency Operation
- Negative and Positive Logic ON/OFF
- Remote Sense
- Wide-output Voltage Adjustment
- Fully Protected
- High Reliability
- 2000 VDC Insulation Voltage Certified
- UL 1950 Recognized, CSA C22.2 No. 950-95

downstream devices.


The use of 100% surface-mount technologies for Q2S assembly, coupled with advanced electronic circuitry and thermal packaging, result in products with extremely high quality and reliability. Q2S converters are available as surface-mountable and through-hole modules, in five standard output voltages ranging from 3.3 V to 1.5 V.

### SELECTION CHART

| MODEL             | INPUT VOLTAGE (VDC) | INPUT CURRENT MAX, ADC | OUTPUT VOLTAGE (VDC) | OUTPUT RATED CURRENT, ADC | RIPPLE & NOISE TYP, mV p-p | EFFICIENCY % | COMMENTS      |
|-------------------|---------------------|------------------------|----------------------|---------------------------|----------------------------|--------------|---------------|
| <b>Q2S30ZA-M6</b> | 36-75               | 1.5                    | 1.5                  | 30                        | 30                         | 83           | Surface-Mount |
| <b>Q2S30ZB-M6</b> | 36-75               | 1.7                    | 1.8                  | 30                        | 30                         | 85           | Surface-Mount |
| <b>Q2S30ZC-M6</b> | 36-75               | 1.9                    | 2.0                  | 30                        | 30                         | 85           | Surface-Mount |
| <b>Q2S30ZD-M6</b> | 36-75               | 2.3                    | 2.5                  | 30                        | 30                         | 87           | Surface-Mount |
| <b>Q2S30ZE-M6</b> | 36-75               | 3.1                    | 3.3                  | 30                        | 30                         | 88           | Surface-Mount |
| <b>Q2S30ZA</b>    | 36-75               | 1.5                    | 1.5                  | 30                        | 30                         | 83           | Through-Hole  |
| <b>Q2S30ZB</b>    | 36-75               | 1.7                    | 1.8                  | 30                        | 30                         | 85           | Through-Hole  |
| <b>Q2S30ZC</b>    | 36-75               | 1.9                    | 2.0                  | 30                        | 30                         | 85           | Through-Hole  |
| <b>Q2S30ZD</b>    | 36-75               | 2.3                    | 2.5                  | 30                        | 30                         | 87           | Through-Hole  |
| <b>Q2S30ZE</b>    | 36-75               | 3.1                    | 3.3                  | 30                        | 30                         | 88           | Through-Hole  |

## Q2S SERIES

### MECHANICAL DRAWING (THROUGH-HOLE)

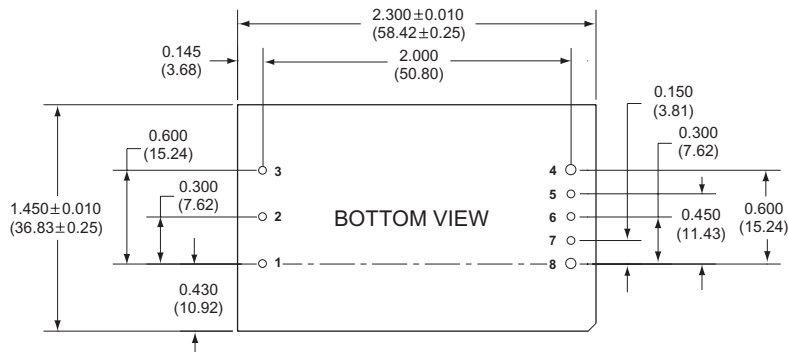


| HT (Max Height) | CL (Min Clearance) |
|-----------------|--------------------|
| +0.000 (+0.00)  | +0.030 (+0.77)     |
| -0.038 (-0.97)  | -0.000 (-0.00)     |
| 0.336 (8.53)    | 0.063 (1.60)       |

### PIN CONNECTIONS

| PIN | FUNCTION      |
|-----|---------------|
| 1   | Vin (+)       |
| 2   | Remote ON/OFF |
| 3   | Vin (-)       |
| 4   | Vout (-)      |
| 5   | Sense (-)     |
| 6   | Trim          |
| 7   | Sense (+)     |
| 8   | Vout (+)      |

- All dimensions are in inches (mm)
- Pins 1-3 and 5-7 are  $\phi 0.040$ " (1.02) with  $\phi 0.078$ " (1.98) shoulder
- Pins 4 and 8 are  $\phi 0.062$ " (1.57) without shoulder
- Pin material: Brass
- Pin Finish: Tin/Lead over Nickel
- Module Weight: 0.95 oz (27 g)

### MECHANICAL DRAWING (SURFACE-MOUNT)

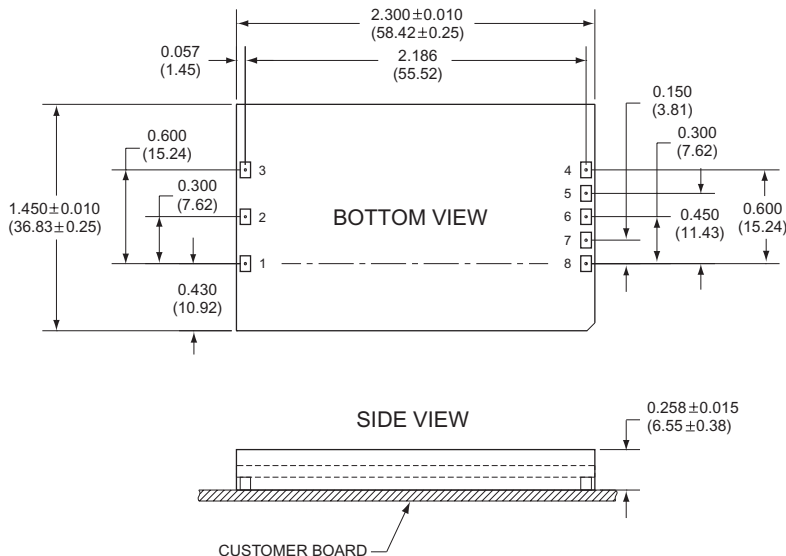

### ORDERING INFORMATION (Consult factory for the complete list of available options.)

| OPTIONS       | SUFFIXES TO ADD TO PART NUMBER WHEN ORDERING OPTIONS (ADD SEQUENTIALLY TO PART NUMBER...TOP OF LIST TO BOTTOM) |                                             |
|---------------|----------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| Remote ON/OFF | No Suffix                                                                                                      | Positive Enable Logic                       |
|               | N                                                                                                              | Negative Logic                              |
|               | 7                                                                                                              | 0.145 Pin Length (0.336" Total Height)      |
|               | 8                                                                                                              | 0.11 Pin Length (0.336" Total Height)       |
| Through-Hole  | No Suffix                                                                                                      |                                             |
| Surface-Mount | M6                                                                                                             | 0.336" (8.5mm) Max. Height 0.063" Clearance |

EXAMPLE: Q2S30ZA-NM6

NUCLEAR AND MEDICAL APPLICATIONS Power-One products are not authorized for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems without the express written consent of the President of Power-One, Inc.

TECHNICAL REVISIONS The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.