


Part Number	Description
TS24D2G	2A, 275 Vac Solid-State Relay



**Part Number Explanation**

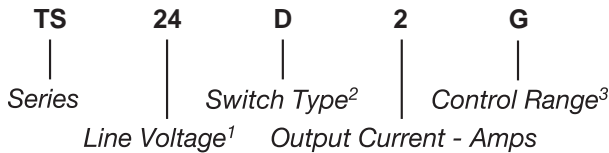

**NOTES**

- Line Voltage (nominal): 24 = 240 Vac;  
3 = 30 Vdc (3–30 Vdc/Vac for TS3R1G)
- Switch Type: D = Zero-cross turn-on; R = Random turn-on
- Control Range: G = 12–30 Vdc/Vac (TS24D2G, TS3R1G)  
G = 12–30 Vdc (TS3R2G)

**MECHANICAL SPECIFICATION**

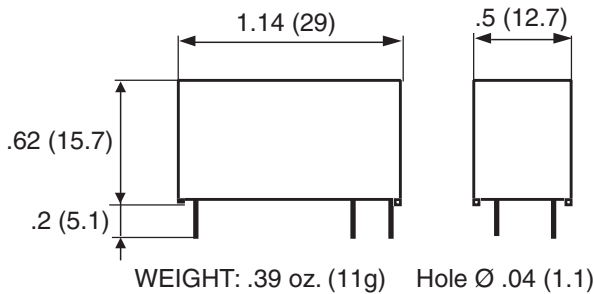


Figure 1 — TS relays; dimensions in inches (mm)

**ELECTRICAL SPECIFICATIONS**

(+25°C ambient temperature unless otherwise specified)

**INPUT (CONTROL) SPECIFICATIONS**

	Min	Max	Units
<b>Control Range</b>			
TS242G, TS3R1G	12	30	Vac/Vdc
TS3R2G	12	30	Vdc
<b>Input Current Range</b>	4.1	13	mA
(See Figure 2)			
<b>Must Turn-Off Voltage</b>		2.5	V
<b>Input Resistance (Typical)</b>		2100	Ω

**FEATURES/BENEFITS**

- Pin-to-pin compatible with electromechanical relays
- AC and DC control
- AC and DC output
- Random and zero-cross turn-on
- Compact size
- High inrush capabilities
- Integrated clamping voltage

**DESCRIPTION**

The Series TS relays provide AC/DC switching in a compact size. The TS relays also provide an AC/DC control. These relays can withstand high surge currents. The TS relays are pin-to-pin compatible with electromechanical relays and may be used as replacements.

**APPLICATIONS**

- Interface applications
- Vending machines
- Light/lamp control
- Contactor driver
- Fan speed control

**APPROVALS**

All models are UL recognized.  
UL File Number E128555.

**CONTROL CHARACTERISTIC**

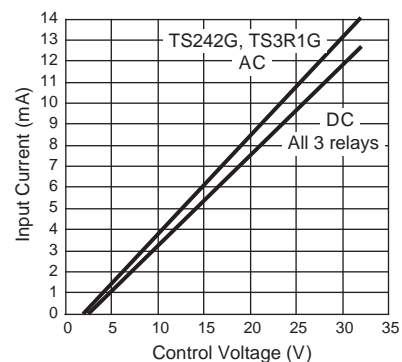


Figure 2

BLOCK DIAGRAM

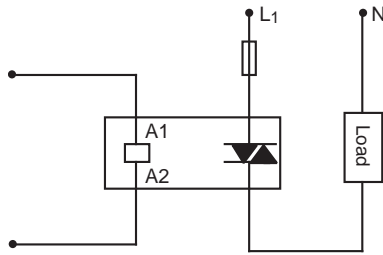


Figure 3a — TS24D2G

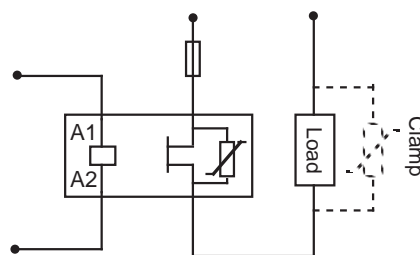


Figure 3b — TS3R1G

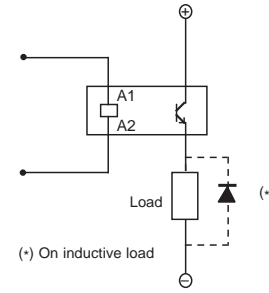


Figure 3c — TS3R2G

GRID DIAGRAM

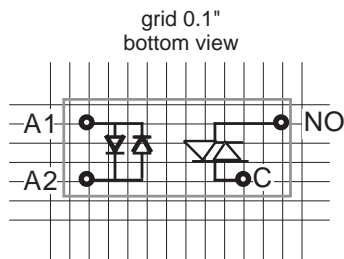


Figure 4a — TS24D2G

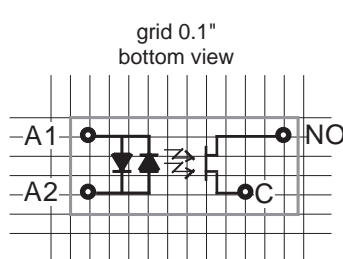


Figure 4b — TS3R1G

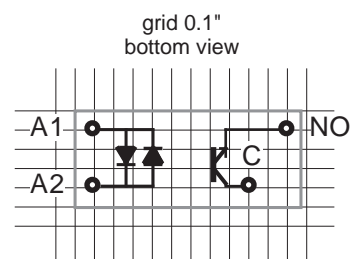


Figure 4c — TS3R2G

ELECTRICAL SPECIFICATIONS  
(+25°C ambient temperature unless otherwise specified)

OUTPUT (LOAD) SPECIFICATIONS

	Min	Max	Units
<b>Operating Range</b>			
TS24D2G	12	275	Vrms
TS3R2G	0	30	Vdc
TS3R1G	0	30	Vac/Vdc
<b>Peak Voltage</b>			
TS24D2G		600	V
TS3R2G		60	V
TS3R1G		60	V
<b>Load Current Range</b>			
TS24D2G	.05	2	Arms
TS3R2G	.001	2.5	Arms
TS3R1G	.001	1	Arms
<b>Maximum Surge Current Rating (Non-Repetitive)</b>			
TS24D2G		100	A
TS3R2G		12	A
TS3R1G		2.4	A

OUTPUT (LOAD) SPECIFICATIONS (Continued)

	Min	Max	Units
<b>On-State Voltage Drop</b>			
TS24D2G		1.0	V
TS3R2G		0.5	V
TS3R1G		0.9	V
<b>Zero-Cross Window (Typical)</b>			
TS24D2G		±10	V
TS3R2G		NA	
TS3R1G		NA	
<b>Off-State Leakage Current (60Hz)</b>			
All Relays		1	mA
<b>Operating Frequency Range</b>			
TS24D2G	1	440	Hz
TS3R1G	0	50	KHz
<b>Turn-On Time (60Hz)</b>			
TS24D2G		10	ms
TS3R2G		50	µs
TS3R1G		5	ms

OUTPUT (LOAD) SPECIFICATIONS (Continued)

	Min	Max	Units
Turn-Off Time (60Hz)			
TS24D2G		17	ms
TS3R2G		600	$\mu$ s
TS3R1G		10	ms

Off-State dv/dt			
TS24D2G		500	V/ $\mu$ s

Switching Frequency			
TS3R2G		100	Hz
TS3R1G		10	ms

I <sup>2</sup> t for Match Fusing (<8.3ms)			
TS24D2G		50	A <sup>2</sup> s

ENVIRONMENTAL SPECIFICATIONS

	Min	Max	Units
Junction Temperature		125	$^{\circ}$ C

Operating Temperature			
TS24D2G	-40	100	$^{\circ}$ C
TS3R2G	-40	100	$^{\circ}$ C
TS3R1G	-40	90	$^{\circ}$ C

Input-Output Isolation			
TS24D2G	4000		V
TS3R2G	2500		V
TS3R1G	4000		V

Junction-Case Thermal Resistance			
TS24D2G		12	$^{\circ}$ C/W
TS3R2G		12	$^{\circ}$ C/W
TS3R1G		44	$^{\circ}$ C/W

Junction-Ambient Thermal Resistance			
TS24D2G		44	$^{\circ}$ C/W
TS3R2G		44	$^{\circ}$ C/W
TS3R1G		88	$^{\circ}$ C/W

Maximum Soldering Heat (1mm case)		260	$^{\circ}$ C
-----------------------------------	--	-----	--------------

THERMAL CURVE

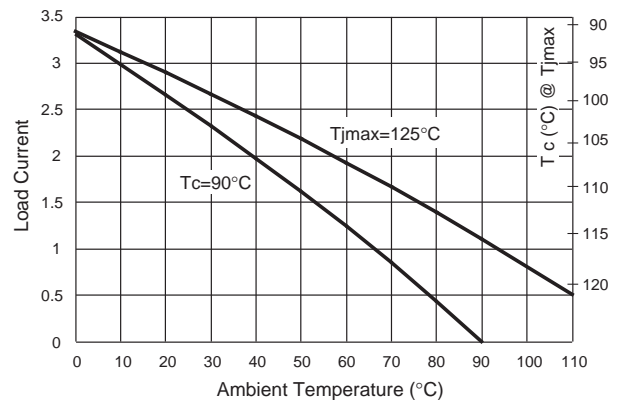


Figure 5a — TS24D2G

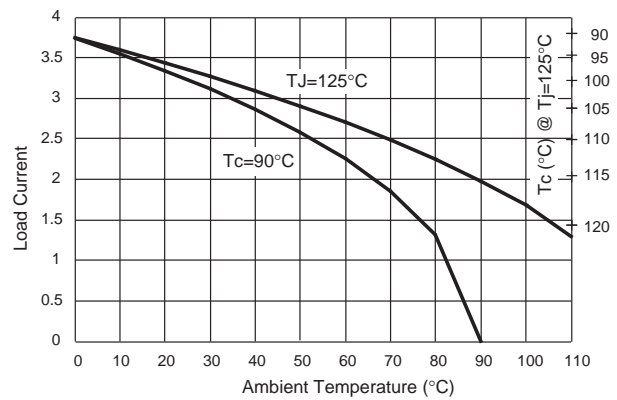


Figure 5b — TS3R2G

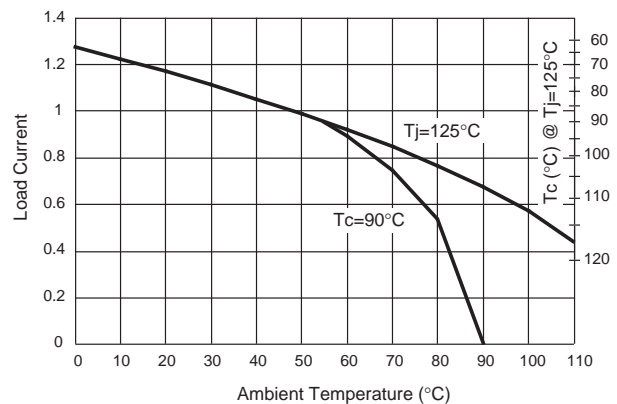


Figure 5c — TS3R1G

**NON-REPETITIVE SURGE CURRENT**

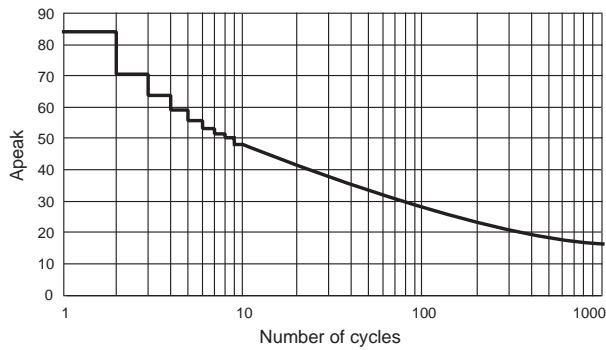


Figure 6a — TS24D2G

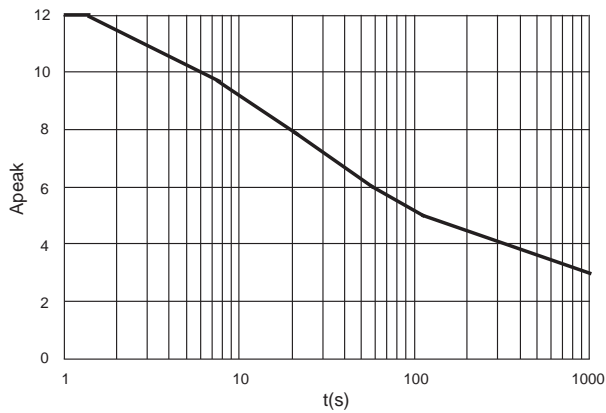


Figure 6b — TS3R2G

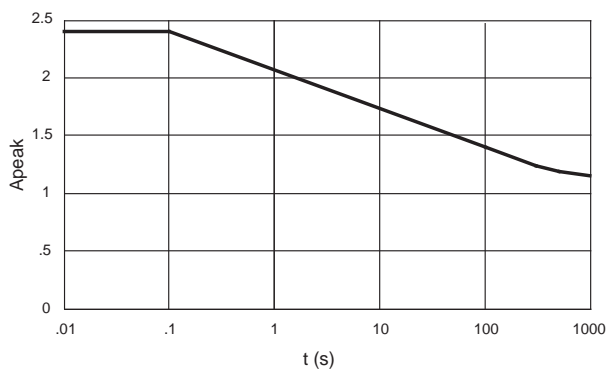


Figure 6c — TS3R1G

**NOTES:**

1. On inductive loads, a free-wheeling diode (or clamp) is recommended.
2. Electrical specifications at 25°C unless otherwise specified.
3. TS3R2G no polarity on the control pins.
4. For additional/custom options, contact factory.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.