

DM74LS465 (DM81LS95A)/DM74LS466 (DM81LS96A)/ DM74LS467 (DM81LS97A)/DM74LS468 (DM81LS98A) TRI-STATE® Octal Buffer

General Description

These devices provide eight, two-input buffers in each package. All employ the newest low-power-Schottky TTL technology. One of the two inputs to each buffer is used as a control line to gate the output into the high-impedance state, while the other input passes the data through the buffer. The 'LS465 and 'LS467 present true data at the outputs, while the 'LS466 and 'LS468 are inverting. On the 'LS465 and 'LS466 versions, all eight TRI-STATE enable lines are common, with access through a 2-input NOR gate. On the 'LS467 and 'LS468 versions, four buffers are enabled from one common line, and the other four buffers are enabled from another common line. In all cases the outputs are placed in the TRI-STATE condition by applying a high logic level to the enable pins. These devices represent octal, low


power-Schottky versions of the very popular DM54/74365, 366, 367, and 368 (DM8095, 96, 97, and 98) TRI-STATE hex buffers.

Features


- Octal versions of popular DM74365, 366, 367, and 368 (DM8095, 96, 97 and 98)
- Typical power dissipation
 - LS465, 467, (LS95A, 97A) 80 mW
 - LS466, 468, (LS96A, 98A) 65 mW
- Typical propagation delay
 - LS465, 467 (LS95A, 97A) 15 ns
 - LS466, 468 (LS96A, 98A) 10 ns
- Low power-Schottky, TRI-STATE technology

Connection Diagrams


Dual-In-Line Packages

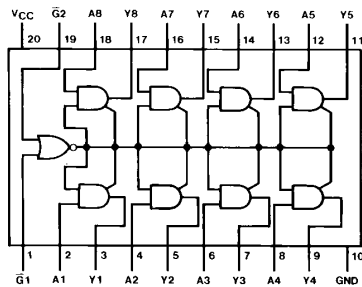


TL/F/6435-1

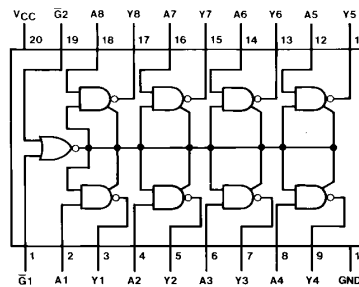

TL/F/6435-2

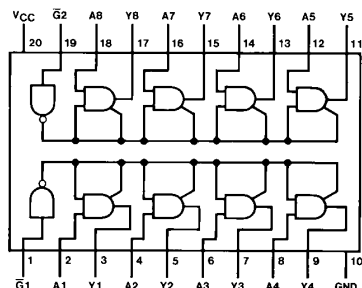

TL/F/6435-3

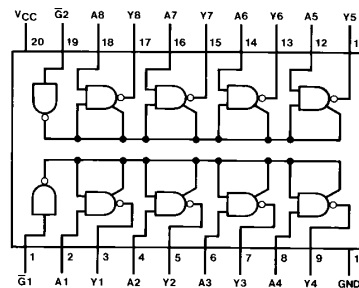

TL/F/6435-4

**Order Numbers DM74LS465WM/DM81LS95AWM, DM74LS465N/DM81LS95AN,
DM74LS466WM/DM81LS96AWM, DM74LS466N/DM81LS96AN,
DM74LS467WM/DM81LS97AWM, DM74LS467N/DM81LS97AN,
DM74LS468WM/DM81LS98AWM or DM74LS468N/DM81LS98AN
See NS Package Number M20B or N20A**

TRI-STATE® is a registered trademark of National Semiconductor Corporation.

Absolute Maximum Ratings (Note)

Supply Voltage	7V
Input Voltage	7V
Operating Free Air Temperature Range	0°C to +70°C
DM74LS/DM81LS	
Storage Temperature Range	−65°C to +150°C

Note: The “Absolute Maximum Ratings” are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits, the parametric values defined in the “Electrical Characteristics” table are not guaranteed at the absolute maximum ratings. The “Recommended Operating Conditions” table will define the conditions for actual device operation.

Recommended Operating Conditions

Symbol	Parameter	Min	Nom	Max	Units
V _{CC}	Supply Voltage	4.75	5	5.25	V
V _{IH}	High Level Input Voltage	2			V
V _{IL}	Low Level Input Voltage			0.8	V
I _{OH}	High Level Output Current			−5.2	mA
I _{OL}	Low Level Output Current			24	mA
T _A	Free Air Operating Temperature	0		70	°C

'LS465 ('LS95A) and 'LS467 ('LS97A) Electrical Characteristics

over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ (Note 1)	Max	Units
V _I	Input Clamp Voltage	V _{CC} = Min, I _I = −18 mA			−1.5	V
V _{OH}	High Level Output Voltage	V _{CC} = Min, I _{OH} = Max V _{IL} = Max, V _{IH} = Min	2.7			V
V _{OL}	Low Level Output Voltage	V _{CC} = Min, I _{OL} = Max V _{IL} = Max, V _{IH} = Min			0.5	V
		I _{OL} = 12 mA, V _{CC} = Min			0.4	
I _I	Input Current @Max Input Voltage	V _{CC} = Max, V _I = 7V			0.1	mA
I _{IH}	High Level Input Current	V _{CC} = Max, V _I = 2.7V			20	μA
I _{IL}	Low Level Input Current	V _{CC} = Max	V _I = 0.5V	A (Note 3)	−20	μA
			V _I = 0.4V	A (Note 4)	−50	
			$\overline{G}$		−50	
I _{OZH}	Off-State Output Current with High Level Output Voltage Applied	V _{CC} = Max, V _O = 2.4V V _{IH} = Min, V _{IL} = Max			20	μA
I _{OZL}	Off-State Output Current with Low Level Output Voltage Applied	V _{CC} = Max, V _O = 0.4V V _{IH} = Min, V _{IL} = Max			−20	μA
I _{OS}	Short Circuit Output Current	V _{CC} = Max (Note 2)	−20		−100	mA
I _{CC}	Supply Current	V _{CC} = Max (Note 3)		16	26	mA

Note 1: All typicals are at V_{CC} = 5V, T_A = 25°C.

Note 2: Not more than one output should be shorted at a time, and the duration should not exceed one second.

Note 3: Both $\overline{G}$ inputs are at 2V.

Note 4: Both $\overline{G}$ inputs are at 0.4V.

'LS465 and 'LS467 Switching Characteristics

$V_{CC} = 5V$, $T_A = 25^\circ C$

Symbol	Parameter	R _L = 667Ω				Units
		C _L = 50 pF		C _L = 150 pF		
		Min	Max	Min	Max	
t _{PLH}	Propagation Delay Time Low to High Level Output		16		25	ns
t _{PHL}	Propagation Delay Time High to Low Level Output		28		40	ns
t _{PZH}	Output Enable Time to High Level Output		25		30	ns
t _{PZL}	Output Enable Time to Low Level Output		30		42	ns
t _{PHZ}	Output Disable Time from High Level Output (Note 1)		20			ns
t _{PLZ}	Output Disable Time from Low Level Output (Note 1)		27			ns

Note 1: $C_L = 5\text{ pF}$.

'LS466 ('LS96A) and 'LS468 ('LS98A) Electrical Characteristics

over recommended operating free air temperature range (unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ (Note 2)	Max	Units
V_I	Input Clamp Voltage	$V_{CC} = \text{Min}$, $I_I = -18\text{ mA}$			-1.5	V
V_{OH}	High Level Output Voltage	$V_{CC} = \text{Min}$, $I_{OH} = \text{Max}$ $V_{IL} = \text{Max}$, $V_{IH} = \text{Min}$	2.7			V
V_{OL}	Low Level Output Voltage	$V_{CC} = \text{Min}$, $I_{OL} = \text{Max}$ $V_{IL} = \text{Max}$, $V_{IH} = \text{Min}$			0.5	V
		$I_{OL} = 12\text{ mA}$, $V_{CC} = \text{Min}$			0.4	
I_I	Input Current @Max Input Voltage	$V_{CC} = \text{Max}$, $V_I = 7V$			0.1	mA
I_{IH}	High Level Input Current	$V_{CC} = \text{Max}$, $V_I = 2.7V$			20	μA
I_{IL}	Low Level Input Current	$V_{CC} = \text{Max}$ $V_I = 0.5V$	A (Note 4)		-20	μA
		$V_I = 0.4V$	A (Note 5)		-50	
		$\overline{G}$			-50	
I_{OZH}	Off-State Output Current with High Level Output Voltage Applied	$V_{CC} = \text{Max}$, $V_O = 2.4V$ $V_{IH} = \text{Min}$, $V_{IL} = \text{Max}$			20	μA
I_{OZL}	Off-State Output Current with Low Level Output Voltage Applied	$V_{CC} = \text{Max}$, $V_O = 0.4V$ $V_{IH} = \text{Min}$, $V_{IL} = \text{Max}$			-20	μA
I_{OS}	Short Circuit Output Current	$V_{CC} = \text{Max}$ (Note 3)	-20		-100	mA
I_{CC}	Supply Current	$V_{CC} = \text{Max}$ (Note 5)		13	21	mA

Note 2: All typicals are at $V_{CC} = 5V$, $T_A = 25^\circ C$.

Note 3: Not more than one output should be shorted at a time, and the duration should not exceed one second.

Note 4: Both $\overline{G}$ inputs are at 2V.

Note 5: Both $\overline{G}$ inputs are at 0.4V.

'LS466 and 'LS468 Switching Characteristics

for test waveforms and output load. $V_{CC} = 5V$, $T_A = 25^\circ C$

Symbol	Parameter	$R_L = 667\Omega$				Units
		$C_L = 50\text{ pF}$		$C_L = 150\text{ pF}$		
		Min	Max	Min	Max	
t_{PLH}	Propagation Delay Time Low to High Level Output		10		16	ns
t_{PHL}	Propagation Delay Time High to Low Level Output		17		30	ns
t_{PZH}	Output Enable Time to High Level Output		15		30	ns
t_{PZL}	Output Enable Time to Low Level Output		35		45	ns
t_{PHZ}	Output Disable Time from High Level Output (Note 1)		20			ns
t_{PLZ}	Output Disable Time from Low Level Output (Note 1)		27			ns

Note 1: $C_L = 5\text{ pF}$.

Function Tables

LS465 (LS95A)

Inputs			Output Y
$\overline{G}1$	$\overline{G}2$	A	
H	X	X	Hi-Z
X	H	X	Hi-Z
L	L	H	H
L	L	L	L

LS466 (LS96A)

Inputs			Output Y
$\overline{G}1$	$\overline{G}2$	A	
H	X	X	Hi-Z
X	H	X	Hi-Z
L	L	H	L
L	L	L	H

LS467 (LS97A)

Inputs		Output Y
$\overline{G}$	A	
H	X	Hi-Z
L	H	H
L	L	L

LS468 (LS98A)

Inputs		Output Y
$\overline{G}$	A	
H	X	Hi-Z
L	H	L
L	L	H


H = High Logic Level

L = Low Logic Level

X = Either High or Low Logic Level

Hi-Z = High Impedance (Off) State

Physical Dimensions inches (millimeters)

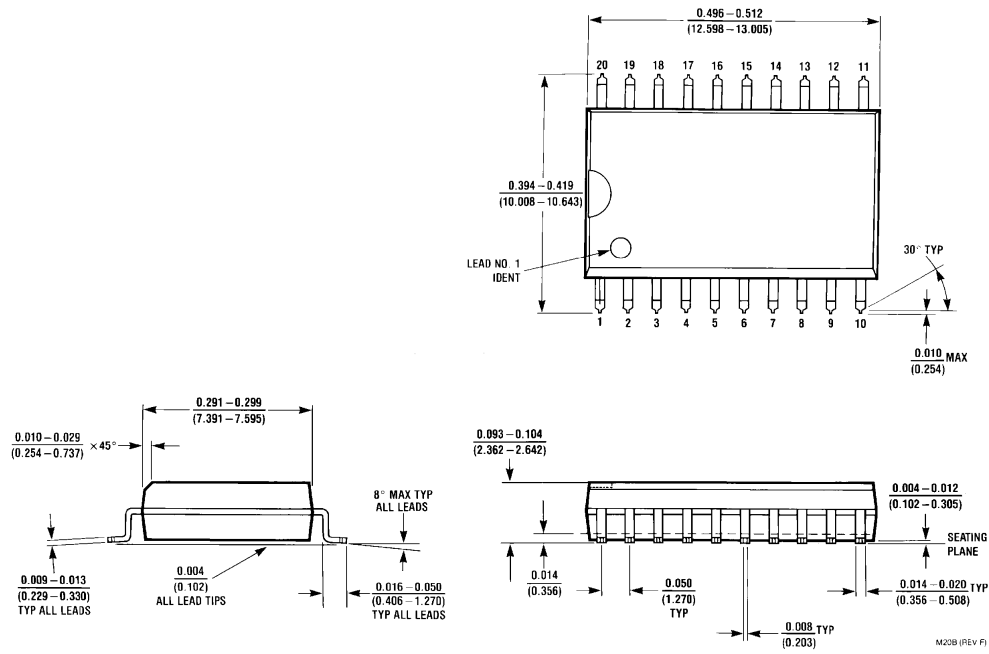

20-Lead Wide Small Outline Molded Package (M)
Order Numbers DM74LS465WM/DM81LS95AWM, DM74LS466WM/DM81LS96AWM,
DM74LS467WM/DM81LS97AWM or DM74LS468WM/DM81LS98AWM
NS Package Number M20B



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.