

Marking Tapes



Colors and combinations meet specific industry and OSHA 29 CFR §1910.144 warning requirements



Mark specific areas and promote safety by identifying potential hazard areas with visible tapes.

- 0.006" vinyl adheres to floors, walls, piping, posts, beams, handrails, stairways, machinery, and equipment
- Waterproof, wear-resistant, minor resistance to acids, oils, grease, caustics, alkalis, and most solvents
- Permanent self-adhesive back



Color/Combination	Code	Application
Solid Colors		
White	WHT	General Facility
Gray	GRY	General Facility
Brown	BRN	General Facility
Black	BLK	General Facility
Red	RED	Fire Protection Equipment & Danger Hazards
Orange	ORN	Danger Points on Machines
Yellow	YEL	Physical Hazards
Green	GRN	First Aid & Safety Equipment
Blue	BLU	Machinery being Worked On
Purple	PUR	X-ray & Radiation Hazards
Checkerboard and Stripe Pattern		
Black/Yellow	BY	General, Physical Hazards
Red/White	RW	Fire Protection & Equipment
Black/White	BW	Housekeeping, Aisles, Traffic, & Passageways
Magenta/Yellow	MY	Radiation Areas
Green/White	GW	Safety & First Aid
Blue/White	BLW	Defective Equipment
Orange/White	OW	Traffic and Caution

To Order: Add color code after part number.
 Example: Part No. PFM2X36 + Color Code WHT = PFM2X36WHT

Part No.	Size	UOM	Part No.	Size	UOM
Solid Colors			Solid Colors		
PFM2X36	2" x 108-ft.	Roll	PFM3X36	3" x 108-ft.	Roll
PFM2X60	2" x 180-ft.	Roll	PFM3X60	3" x 180-ft.	Roll
Checkerboard Pattern			Checkerboard Pattern		
PFMC2X18	2" x 54-ft.	Roll	PFMC3X18	3" x 54-ft.	Roll
Stripe Pattern			Stripe Pattern		
PFM2X18	2" x 54-ft.	Roll	PFM3X18	3" x 54-ft.	Roll
PFM2X36	2" x 108-ft.	Roll	PFM3X36	3" x 108-ft.	Roll

Reflective Tapes



- Safety-grade with "bounce-back" reflectivity
- Improved daytime, low-light and night time visibility
- 0.0055" thick urethane tape
- Permanent adhesive with peel-off liner
- Suitable for outdoor use on poles, barricades, fences, buildings, private roads, and off-road vehicles

Available colors with color code:

Color	Code
Solid Colors	
Black	BLK
Blue	BLU
Green	GRN
Orange	ORN
Red	RED
White	WHT
Yellow	YEL
Stripe Colors	
Black/White	BW
Black/Yellow	BY
Orange/White	OW
Red/White	RW

To Order: Add color code after part number.
 Example: Part No. PFMR2X15 + Color Code BW = PFMR2X15BW

Part No.	Size	UOM
PFMR2X15	2" x 15-ft.	Roll
PFMR2X30	2" x 30-ft.	Roll
PFMR3X15	3" x 15-ft.	Roll

Message Marking Tapes

Use marking tape with specific message to point out potential hazard areas.

- Bold contrasting message printed repeatedly
- 6-mil vinyl adheres to floors, walls, and equipment
- Clear overlamine protective film resists dirt, light chemicals and light abrasions
- Permanent, self-adhesive back
- 2" x 54-ft. rolls

UOM
Roll




Non-Slip Floor Marking Tapes



Use non-slip tapes to mark and identify aisles, pathways, and designated locations in your facility.

Sub-surface printed 0.004" vinyl tapes are overlaminated with a 0.017" clear, protective pebble-textured tread. The dimpled non-slip surface is ideal for pedestrian traffic areas.

- Dual-layer, color vinyl and clear textured vinyl construction
- Strong acrylic-based adhesive peel-off back liner
- Adhere to clean, smooth, dry surface
- Service temperature range: -20° to 140°F
- Available in solid colors or with messages

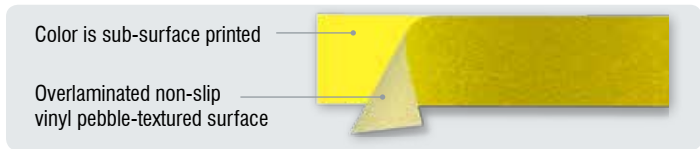

To Order Solid Color Tapes:

Add color code after part number: Red – RED, Orange – ORN, Yellow – YEL, Green – GRN, Blue – BLU, White – WHT, Black – BLK.

Example: Part No. PFMT2X100 + Color Code YEL = PFMT2X100YEL

Part No.	Size	UOM
PFMT2X100	2"W x 100-ft.	Roll
PFMT3X100	3"W x 100-ft.	Roll

Message Tapes

Size	UOM
3"W x 50-ft.	Roll



PFM0598



PFM0600



PFM0599



PFM0597




PFM0601

Non-Slip Floor Marking Shapes

Mark pallets, storage, and walkways in your facility – ideal for 5S programs.

- Self-adhesive 0.004" vinyl
- Protective non-slip, pebble-textured overlaminate
- Strong acrylic-based adhesive peel-off back liner
- Adhere to clean, smooth, dry surface
- Service temperature range: -20° to 140°F

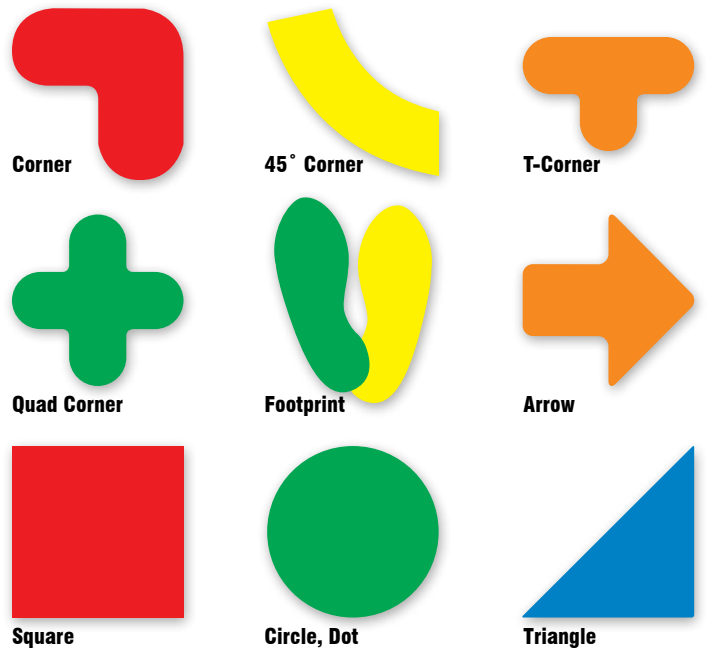

To Order: Add color code after part number: Red – RED, Orange – ORN, Yellow – YEL, Green – GRN, Blue – BLU, White – WHT, Black – BLK.

Example: Part No. PFMTS09 + Color Code GRN = PFMTS09GRN

Part No.	Size	UOM
Corner		
PFMTS09	6" x 6"	Each
PFMTS10	12" x 12"	Each
45° Corner		
PFMTS20	6"	Each
PFMTS19	12"	Each
T-Corner		
PFMTS11	6" x 9"	Each
PFMTS12	8" x 12"	Each
Quad Corner		
PFMTS17	9" x 9"	Each
PFMTS18	12" x 12"	Each
Part No.	Length	UOM

Footprints		
PFMTS01	6"	Pair
PFMTS02	12"	Pair

Part No.	Size	UOM
Arrow		
PFMTS14	3"	Each
PFMTS15	6"	Each
PFMTS16	12"	Each
Square		
PFMTS05	3" x 3"	Each
PFMTS06	6" x 6"	Each
Circle, Dot		
PFMTS03	3" dia	Each
PFMTS04	6" dia	Each
Triangle		
PFMTS07	3"	Each
PFMTS08	6"	Each

Floor Marking Shapes

Mark directional traffic paths or hazardous areas on floors, stairways, and walls.

- 0.005" vinyl
- Individually die-cut shapes
- Aggressive, permanent, self-adhesive back
- Peel-off liner




Available colors with color code:

Red – RED, Blue – BLU, Green – GRN, Black – BLK, Yellow – YEL, Orange – ORN, White – WHT

To Order: Add color code after part number.
Example: Part No. PFM024 + Color Code BLU = PFM024BLU


Size*	Std. Pkg. Qty.	UOM
2"	250	Roll
3"	250	Roll
4"	100	Roll
6"	5 Pair	Pkg.
12"	5 Pair	Pkg.

Dots




*Size for: Dot by diameter

Arrows



*Size for: Arrow measured by width of point

Footprints



*Size for: Footprint is 6" or 12" length

Glow-in-the-Dark Tapes & Shapes





Visibility and safety in emergency blackout situations

- Photoluminescent tapes and shapes store energy from any light source
- 10-hour glow rating
- 0.010" polyester with laminated gloss surface
- Permanent adhesive backing with peel-off liner



Glow-in-the-Dark Tapes


Solid Color		Stripe Pattern		Arrow Pattern		Size
Part No.	UOM	Part No.	UOM	Part No.	UOM	
PFM0243	Roll	PFM0246	Roll	PFM0249	Roll	2" x 15-ft.
PFM0244	Roll	PFM0247	Roll	PFM0250	Roll	2" x 30-ft.
PFM0245	Roll	PFM0248	Roll	PFM0251	Roll	3" x 15-ft.




Glow-in-the-Dark Shapes

Size	Std. Pkg. Qty.	UOM
2"	50	Roll
3"	50	Roll
6"	1 Pair	Pkg.
12"	1 Pair	Pkg.

Dots



Arrows



Footprints




Non-Skid Floor Tapes

Create a high-traction surface to prevent slips, trips, and falls.



OSHA 29 CFR §1910.24 (f)

- Durable surface provides good grip, wear resistance, and water resistance
- Suitable for indoor and outdoor environments
- Resists sliding, buckling, wrinkling, and peeling
- Black tape is 60-grit aluminum oxide compound layer fused onto thick PVC base; colored and striped tapes are 46-grit
- High-tack acrylic adhesive back
- Peel-off liner

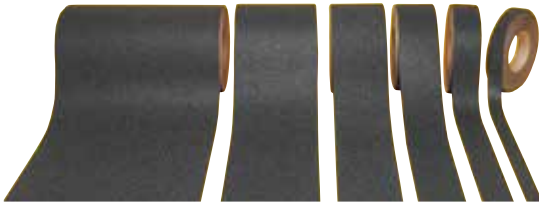

Part No.	Size	UOM
<i>Solid Black</i>		
PFM0090	1" x 60-ft.	Roll
PFM0092	2" x 60-ft.	Roll
PFM0094	3" x 60-ft.	Roll
PFM0095	4" x 60-ft.	Roll
PFM0097	6" x 60-ft.	Roll



Part No.	Size	UOM
<i>Solid Yellow</i>		
PFM0091	1" x 60-ft.	Roll
PFM0093	2" x 60-ft.	Roll
PFM0096	4" x 60-ft.	Roll
<i>Striped Black/Yellow</i>		
PFM0103	2" x 60-ft.	Roll
PFM0105	4" x 60-ft.	Roll



- Muted yellow appearance masks dirt and grime

Part No.	Size	UOM
<i>Muted Yellow w/ Black Particles</i>		
PFM0107	2" x 60-ft.	Roll
PFM0108	4" x 60-ft.	Roll

Non-Skid Floor Signs

High-traction, anti-skid, clear grit surface. 6" x 24". Sub-surface printed vinyl floor signs. High-tack, acrylic adhesive back. Peel-off liner.

UOM
Each



PFM0040



PFM0041



PFM0042



PFM0046



PFM0045



PFM0043



PFM0047




PFM0044

Non-Skid Floor Shape Tapes

Get a finished look to your anti-skid tapes in pre-cut shapes.



- Rounded corners to prevent corners from lifting
- Aggressive 60-grit aluminum oxide compound layer fused onto a thick PVC base
- Peel-off liner with high-tack acrylic adhesive back
- Suitable for indoor and outdoor environments, water resistant



Part No.	Description	Size	UOM
PFM0110	Square	5 1/2" x 5 1/2"	Each
PFM0109	Wide Strip	3" x 24"	Each
PFM0111	Cleat	6" x 24"	Each
PFM0112	Cleat w/ Refl. Yellow	6" x 24"	Each
PFM0113	Cleat w/ Glow	6" x 24"	Each

High Performance Marking Tapes

Heavy-duty composite tape outperforms standard floor marking tapes.

Printed 0.002" polyester tape with 2-mil gloss overlamine provides superior durability for industrial facility and high plant traffic.

- High-gloss surface resists marks and smudges
- Resistant to abrasions, water, chemicals and heat
- High tack, acrylic adhesive back minimizes peel or lift
- Applies to clean, non-coated, smooth or rough surfaces, including concrete
- Low-profile reduces tears and scratches from skids and pallet jacks
- Removes easily without leaving residue or damage to the floor
- Minimum application temperature: 50°F
- Available in solid colors or with messages



To Order Solid Color Tapes: Add color code after part number: Red – RED, Orange – ORN, Yellow – YEL, Green – GRN, Blue – BLU, White – WHT, Black – BLK. Example: Part No. PFMH2X100 + Color Code BLK = PFMH2X100BLK

Part No.	Size	UOM
PFMH2X100	2"W x 100-ft.	Roll
PFMH3X100	3"W x 100-ft.	Roll

Message Tapes


Size	UOM
3"W x 50-ft.	Roll



Floor Label Frame System

Place and protect message, barcode and other identification on the floor in a sturdy frame system.

Metal frame mounts directly to the floor with four concrete screws (included) and contains a clear protective cover to protect your label (not included) underneath. Beveled edges prevent damage from rollover of pallet jacks and forklift vehicles.

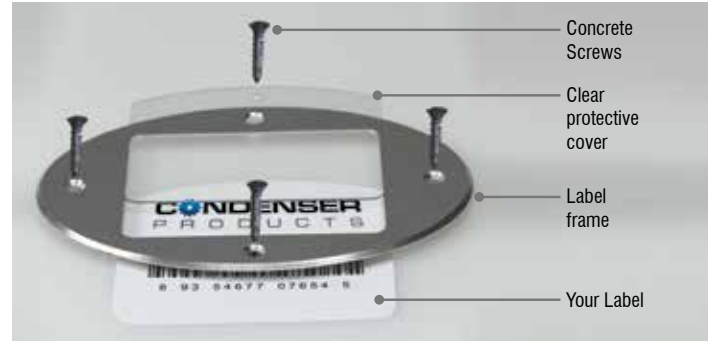

Small size:

- 8 1/2" x 5 1/2" x 1/8" all-aluminum oval frame
- 3 1/2" x 5" x 0.063" clear visible protective polycarbonate cover

Large size:

- 12" x 7 1/2" x 1/8" all-aluminum oval frame
- 5" x 7" x 0.063" clear visible protective polycarbonate cover

Small Part No.	Large Part No.	Std, Pkg. Qty.	UOM
PBB0085	PBB0086	Each	Each
PBB0081	PFM0001	10	Pkg.
PBB0083	PFM0002	25	Pkg.
PBB0084	PFM0003	50	Pkg.
PBB0082	PFM0004	100	Pkg.

Textured Marking Tapes

Low-profile grip vinyl tapes are ideal for indoor/outdoor and wet or dry environments.

- Reinforced vinyl with weather-proof adhesive system
- Slip-resistant, mild abrasive surface
- Install on smooth, clean and dry surfaces
- Low level reflectivity
- 3"W x 108-ft. long rolls
- Service temperature range: 0° to 150°F



To Order: Add color code after part number:

Red – RED, Blue – BLU, Yellow – YEL, White – WHT, Green – GRN.

Example: Part No. PFMT3X36 + Color Code YEL = PFMT3X36YEL

Part No.	UOM
PFMT3X36	Roll

Non-Slip Shape Floor Signs

Grab attention with non-slip floor message signs.

- Bold colors and graphics in unique shapes
- Self-adhesive vinyl floor signs are sub-surface printed
- Overlaminated with pebble-textured, non-slip layer
- Can withstand heavy foot traffic
- Permanent adhesive back with peel-off liner
- Signs adhere to smooth, clean, and dry surface

Diamond



17" PFM0054



17" PFM0055



17" PFM0056



17" PFM0057



17" PFM0058



17" PFM0059



17" PFM0060



17" PFM0062



17" PFM0061

Triangle



17" PFM0071



17" PFM0074



17" PFM0072



17" PFM0073



17" PFM0075



17" PFM0076

Pavement-Print Signs



Place message and graphic signs outdoors on pavement.

- Adheres to asphalt, concrete and step-stones
- Conforms to rough, untreated surfaces like stone and cement
- High-performance adhesive back, foil-base material
- Non-laminate surface contains embedded glass beads for a non-slip texture - meeting NFSI and ASTM D2047 specifications
- Withstands normal to heavy walking foot traffic and other abrasions
- Apply to swept, clean, dry surface
- Application temperature range: 50° to 100°F
- For short- to long-term applications
- Removes easily, usually without any residues



17" PFM0083



17" PFM0082



17" PFM0078



17" PFM0088



17" PFM0080



17" PFM0081



17" PFM0085



17" PFM0079



17" PFM0087



17" PFM0077



17" PFM0089



17" PFM0086



17" PFM0084

Non-Slip Floor Signs

Non-slip, pebble-textured, clear surface withstands heavy pedestrian traffic. Image is sub-surface printed. Permanent, self-adhesive vinyl with peel-off liner.

Description	UOM
Round-Style	Each
Round-Style Glow Adhesive	Each
Mat-Style	Each
Step-Style	Each



Round-Style

17" PFM0009	17" PFM0029	17" PFM0033	17" PFM0030	17" PFM0016	17" PFM0011	17" PFM0008	17" PFM0031
17" PFM0020	17" PFM0026	17" PFM0022	17" PFM0027	17" PFM0017	17" PFM0018	17" PFM0023	17" PFM0034
17" PFM0010	17" PFM0028	17" PFM0015	17" PFM0019	17" PFM0013	17" PFM0025	17" PFM0021	17" PFM0036
17" PFM0012	17" PFM0032	17" PFM0014	17" PFM0037	17" PFM0024	17" PFM0035		

Mat-style

20" x 14" PFM0063	20" x 14" PFM0069	20" x 14" PFM0064	20" x 14" PFM0065	20" x 14" PFM0067	20" x 14" PFM0068
-------------------	-------------------	-------------------	-------------------	-------------------	-------------------

Step-Style

20" x 14" PFM0066	20" x 14" PFM0070	6" x 24" PFM0048	6" x 24" PFM0053	6" x 24" PFM0051
		6" x 24" PFM0050	6" x 24" PFM0052	6" x 24" PFM0049



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.