

DEVKIT-S12ZVC QUICK START GUIDE (QSG)

ULTRA-RELIABLE MCUs FOR
INDUSTRIAL AND AUTOMOTIVE



EXTERNAL USE




SECURE CONNECTIONS
FOR A SMARTER WORLD

Get to know the DEVKIT-S12ZVC

The DEVKIT-S12ZVC is an ultra-low-cost development platform for S12 Microcontrollers.

Features include easy access to all MCU I/O's, a standard-based form factor compatible with the Arduino™ pin layout, providing a broad range of expansion board options, and a USB serial port interface for connection to the IDE, the board has option to be powered via USB or an external power supply.

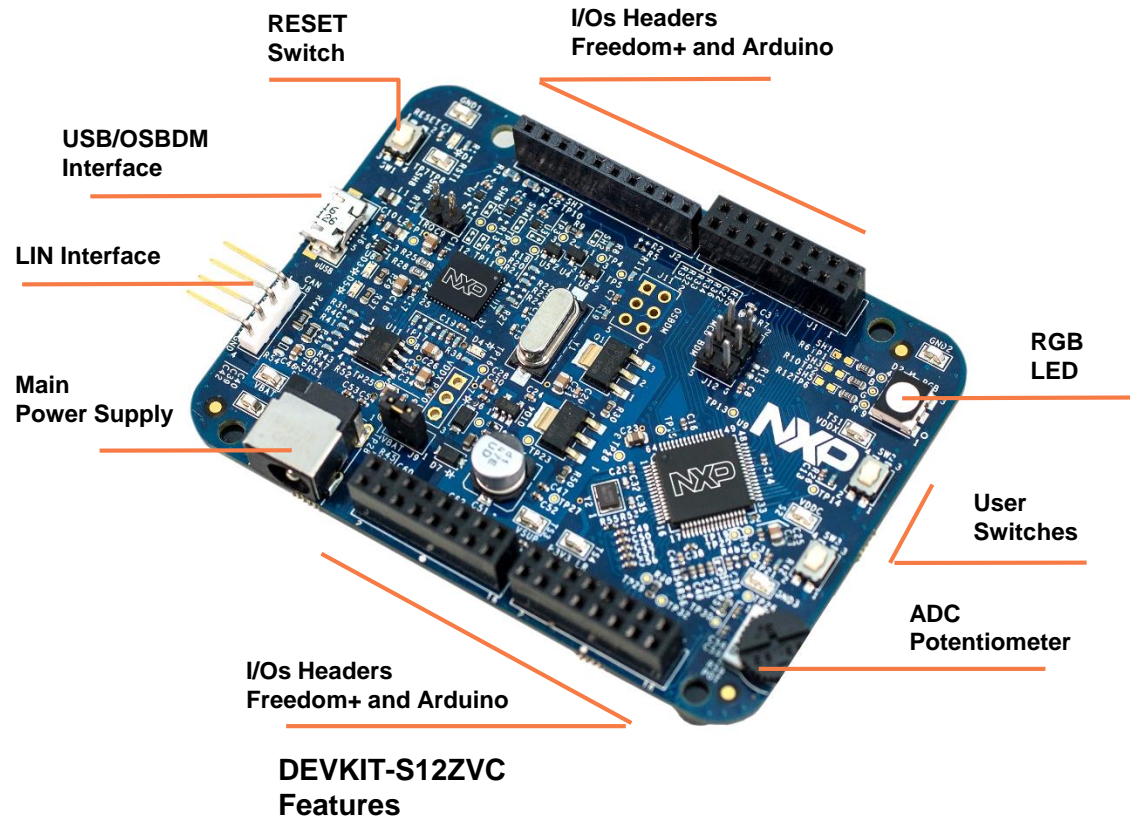


Power Supply and Communications


USB/OSBDM Connector
 CON 1X5 USB_MICRO_AB_RECEPTACLE
 RA SMT 0.65MM SP 105H AU

DESCRIPTION	NAME	PIN
	CANH	J8-01
	CANL	J8-02
	VBAT	J8-03
	GND	J8-04

DESCRIPTION	NAME	PIN
	VBAT	J1-01
	GND	J1-03

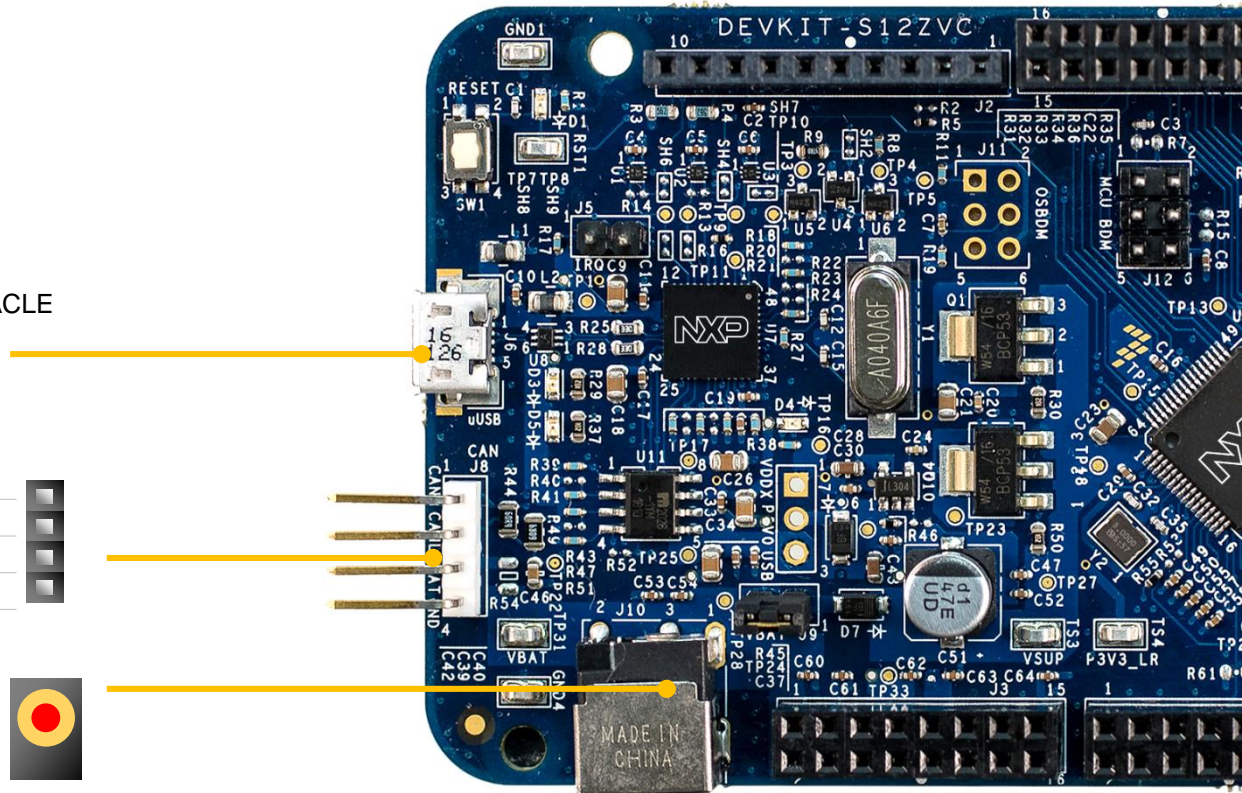

Input/Output Connectors

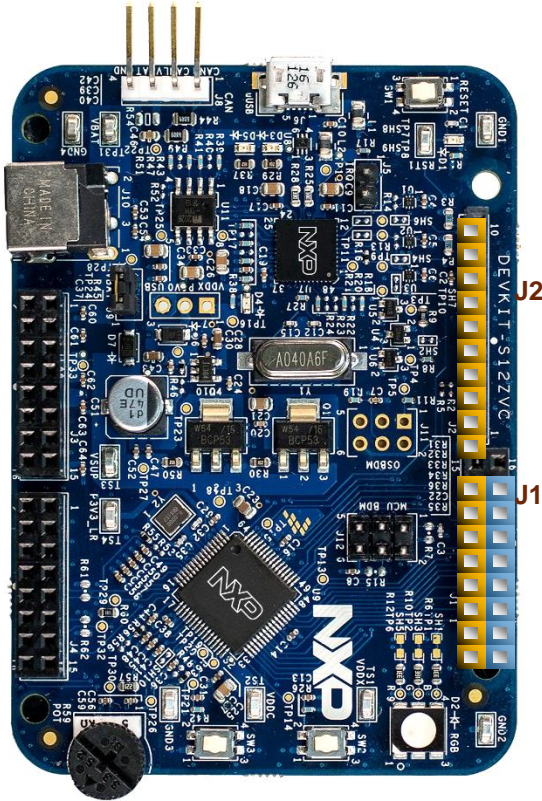

Arduino Compatibility

The internal rows of the I/O headers on the DEVKIT-S12ZVC are arranged to fulfill Arduino™ shields compatibility.


FUNCTION	PORT	PIN
RXD	PS4	J1-01
TXD	PS5	J1-03
PWM	PP0	J1-05
PWM	PP1	J1-07
PWM	PP2	J1-09
PWM	PP3	J1-11
PWM	PP4	J1-13
PWM	PP5	J1-15

FUNCTION	PORT	PIN
PWM	PT7	J2-01
PWM	PP7	J2-02
SPISS	PWM PS3/PP6	J2-03
SPIMOSI	PWM PS1	J2-04
SPIMISO	PS0	J2-05
SPISCK	PS2	J2-06
	GND	J2-07
	AREF	J2-08
SDA	PJ1	J2-09
SCL	PJ0	J2-10

PIN	PORT	FUNCTION
J1-02	PT2	GPIO
J1-04	PT3	GPIO
J1-06	PT6	GPIO
J1-08	PT4	GPIO
J1-10	PT5	GPIO
J1-12		
J1-14		
J1-16		



Input/Output Connectors

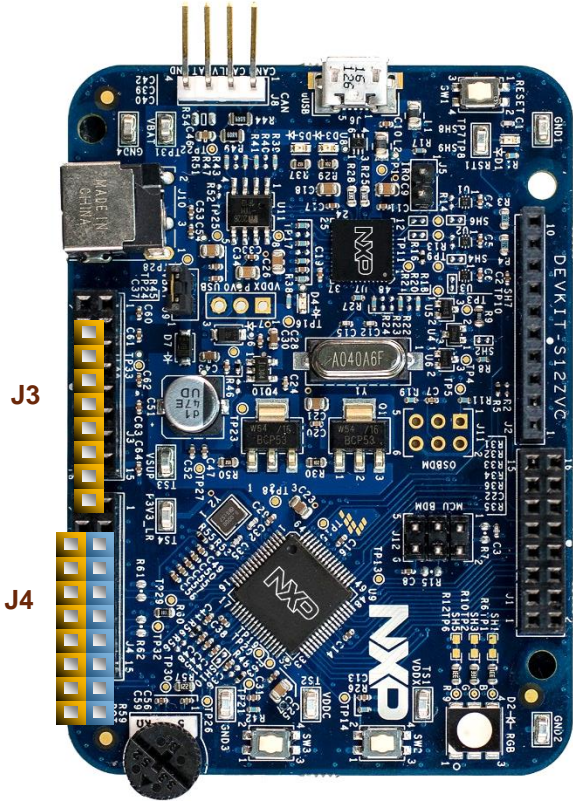


Arduino Compatibility

The internal rows of the I/O headers on the DEVKIT-S12ZVC are arranged to fulfill Arduino™ shields compatibility.

FUNCTION	PORT	PIN
VIN		J3-01
VDD		J3-02
RESET		J3-03
P3V3		J3-04
P5V0		J3-05
GND		J3-06
GND		J3-07
VIN		J3-08
		J3-02
		J3-04
		J3-06
	PDA10	J3-08
	PDA11	J3-10
	PDA12	J3-12
	PDA13	J3-14
	PDA14	J3-16
	PDA15	

FUNCTION	PORT	PIN	PIN	PORT	FUNCTION
ADC	AN7	J4-01	J4-02		
ADC	AN6	J4-03	J4-04		
ADC	AN5	J4-05	J4-06	PS6	
ADC	AN4	J4-07	J4-08	PS7	
ADC	AN3	J4-09	J4-10	PL1	
ADC	AN2	J4-11	J4-12	PL0	
ADC	AN1	J4-13	J4-14	AN9	
ADC	AN0	J4-15	J4-16	AN8	

Programming interface and User Peripherals

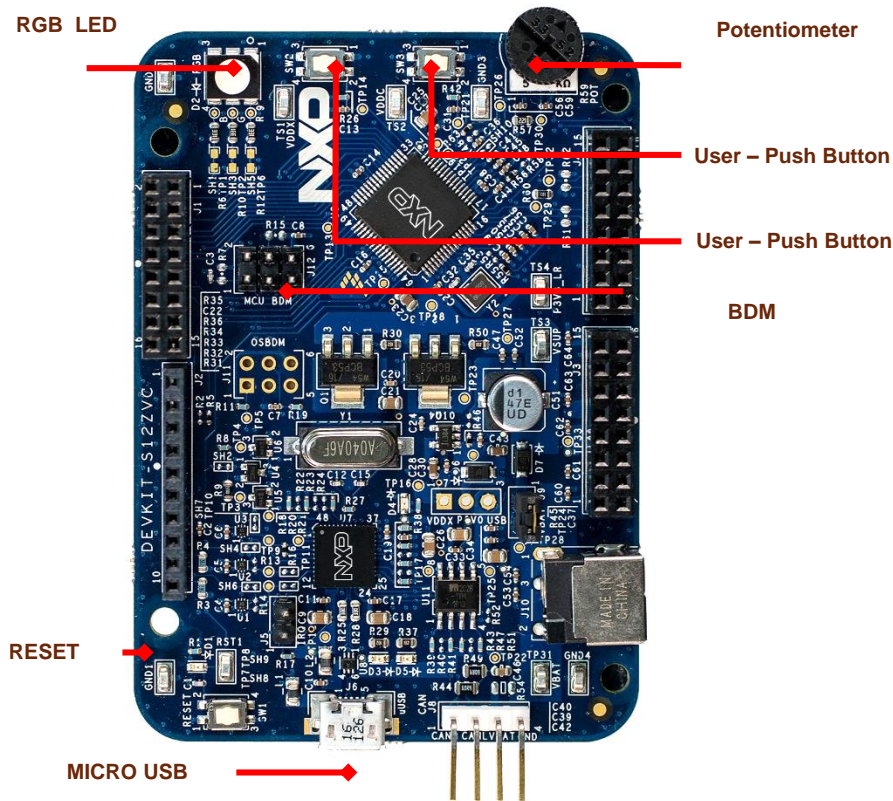

Peripheral	ID	MCU Port	Description
Buttons	SW2	PAD11	User switch (Active high)
	SW3	PAD10	User switch (Active high)
	SW1	RESET	RESET Switch
Potentiometers	R59	AN1	Potentiometer connected to ADC port AN0/AN1
LED	D2	PP4	RGB LED - Green
		PP5	RGB LED - Red
		PP6	RGB LED - Blue
	D3	-	OSBDM PWR LED, ON when OSBDM is successfully enumerated as USB device.
	D5	-	OSBDM STATUS LED. ON when OSBDM is successfully transmitting as USB device.
	D4	VDDX	MCU Power LED Indicator. ON when VDDX is regulating to +5V
Communication	D1	RESET	RESET LED Indicator
	J6	-	OSBDM USB
	J8	CAN	CAN Interface

CAUTION:

When powered from the USB bus, do not exceed the 500mA maximum allowable current drain. Damage to the target board or host PC may result.



Step-by-Step Installation Instructions

1

Install Software and Tools

Install CodeWarrior Development Studio for S12Z 10.6(Eclipse).

2

Connect the USB Cable

Connect one end of the USB cable to the PC and the other end to the mini-B connector on the DEVKIT-S12ZVC board. Allow the PC to automatically configure the USB drivers if needed.

3

Using the Example Project

The pre-loaded example project utilizes the **DEVKIT-S12ZVC** potentiometer and the RGB LED. Once the board is plugged in you can adjust the potentiometer and the RGB LEDs should illuminate/de-illuminate in response. Each color will change when the potentiometer position is adjusted.

4

Learn More About the S12ZVC

Read the release notes and documentation on the freescale.com/S12ZVC.

- The Processor Expert graphical initialization software included in your CodeWarrior installation will help reduce your time to market
- CodeWarrior for S12Z with examples

In this quick start guide, you will learn how to set up the **DEVKIT-S12ZVC** board and run the default exercise.




Documentation and References

Application Notes

- **AN4867**, Hardware Design Guidelines for S12ZVC - Application notes (REV 3)
- **AN5082**, MagniV in 24 V Applications - Application note (REV 1)
- **AN5090**: Using the S12ZVC Device for Industrial Applications (REV 0)

Reference Manual and Datasheet

- MC9S12ZVC-Family Reference Manual & Datasheet

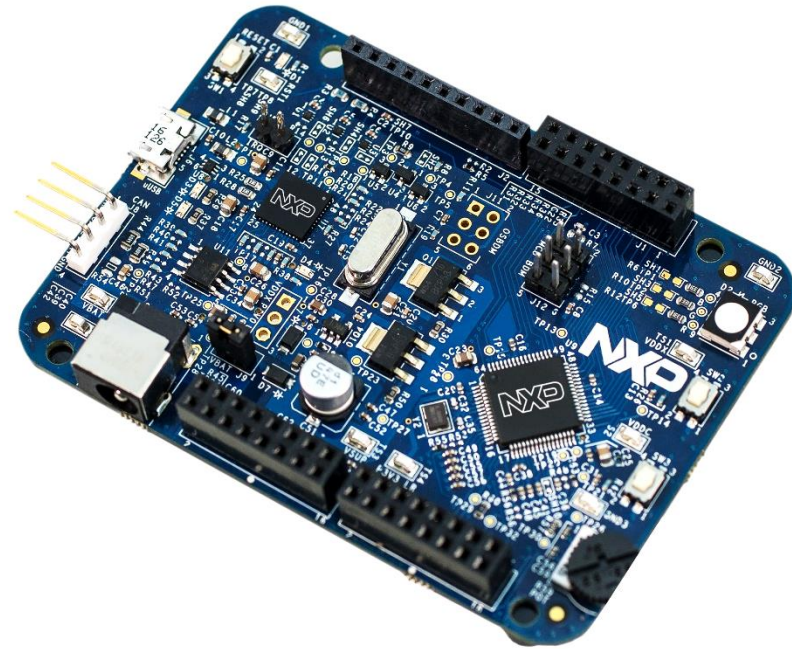

For more information please visit : www.nxp.com/S12ZVC

Development Tools Ecosystem

Compilers

- Codewarrior S12Z
- Cosmic

IDE

- Codewarrior
- Cosmic Zap

Programmiers


- P&E
- Cyclone Pro Programmer

Debugger

- CW & P&E S12 Debugger
- Cosmic Zap Debugger
- iSYSTEM winIDEA

Support Tools:

- FREEMASTER run time debugger and for instrumentation/calibration

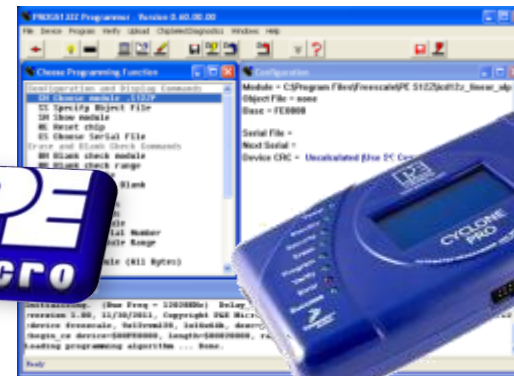



SECURE CONNECTIONS
FOR A SMARTER WORLD



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.