


I2C-7SEG™ I²C 4-DIGIT 7-SEGMENT DISPLAY
User Manual

GRAVITECH.US

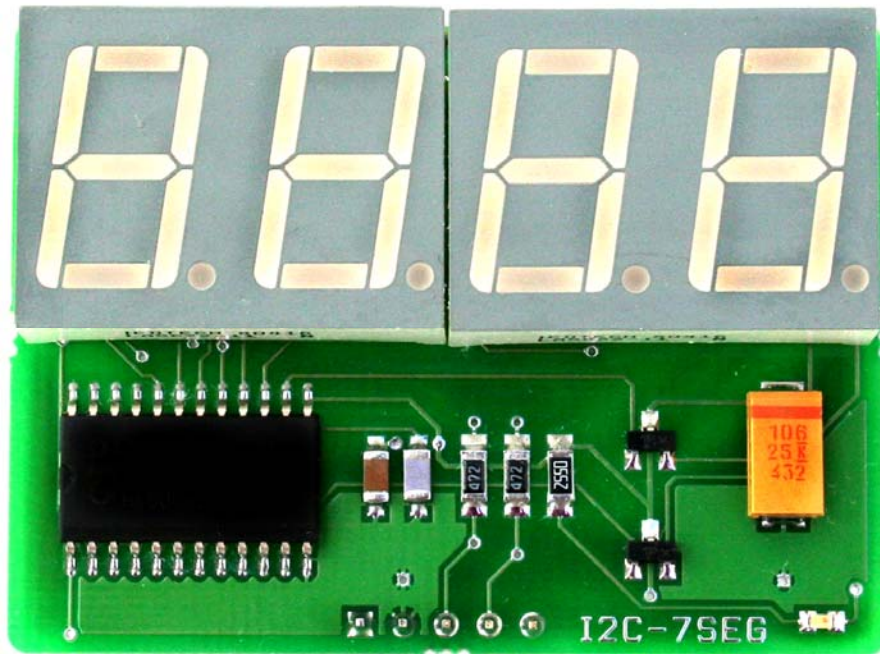

uResearch

GRAVITECH GROUP

Copyright © 2007 MicroResearch
GRAVITECH GROUP WWW.GRAVITECH.US

I2C-7SEGTTM I²C 4-DIGIT 7-SEGMENT DISPLAY

User Manual

Description

The I2C-7SEGT board is a 5-pin CMOS device that provides 4-digit of 7-segment display using I²C bus. There are no external components required. Only two signal lines SDA and SCL plus supply voltage and ground are required to be connected. This makes it perfect for embedded systems that require LED display.

This board features innovations that set it apart from other 7-segment module. Innovations feature like on-board I²C address jumpers, pull-up resistors and power LED. The module can be quickly connected directly on to the breadboard. The board is small and compact in size 1.50 x 2.05 inches.

The I2C-7SEGT is designed base on SAA1064 IC. The circuit is especially designed to drive four 7-segment LED displays with decimal point by means of multiplexing between two pairs of digits. It features an I²C bus slave transceiver interface with the possibility to program four different SLAVE ADDRESSES, a POWER RESET flag, 16 current sink OUTPUTS, controllable by software up to 21 mA, two multiplex drive outputs for common anode segments, an on-chip multiplex oscillator, control bits to select static, dynamic and blank mode, and one bit for segment test.

A jumper pins vary the fixed I²C address and allow up to four devices to share the same I²C bus.

Features

- Five colors to choose from (green, red, orange, orange/red and yellow)
- Flicker free multiplexed 7-segment display
- Total control of individual segment
- Display brightness controllable by software
- Automatically refreshes and updates each display digit
- Free up host controller for continuous display updates and refresh loops
- Stand alone module, no external components required
- On-board I²C address jumpers, pull-up resistors and power LED
- Decoupling supply voltage
- Design easy for breadboard
- High quality double sided PCB
- All SMT components
- Small and compact in size 1.50 x 2.05 inches
- Single row 0.4" width, 0.1" pitch header pins
- Flexible operating power supply voltage range of 4.5V to 15V
- Suitable for 5.0V microcontroller


Applications

- Any display applications

* I²C is a trademark of Philips Semiconductors Corporation.

I2C-7SEG™ I²C 4-DIGIT 7-SEGMENT DISPLAY User Manual

Pin Configuration

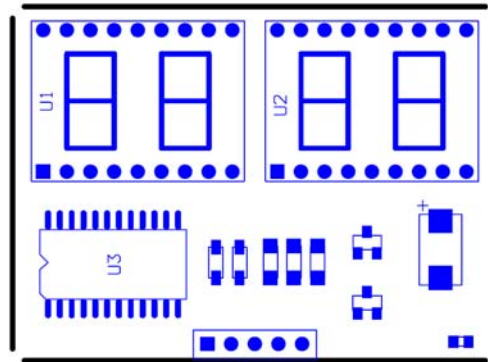

VCC (1)
GND (2)
SDA (3)
SCL (4)
ADR (5)

Pin No.	Name	Type	Description
1	VCC	PWR	Supply voltage
2	GND	PWR	Supply ground
3	SDA	I/O	Serial data line
4	SCL	Input	Serial clock line
5	ADR	Input	Address selection input (DO NOT connect this pin when using internal address mode)

Interfaces

Power:

The I2C-7SEG board needs an external 4.5VDC – 15.0VDC supply.

- **VCC:** is an input power 4.5VDC – 15.0VDC to I2C-7SEG board.

- **GND:** is a common ground for every pin. This pin **MUST** be connected to ground of the external power supply.

I²C pins:

The I2C-7SEG operates as a slave on the I²C bus. Only two signal lines SDA and SCL are required for I²C bus. Please refer to I²C specification for more information.

I2C-7SEG™ I²C 4-DIGIT 7-SEGMENT DISPLAY User Manual

Module Configuration

I²C address:

Default address shipped from the manufacture is 0x70 for write and 0x71 for read.

ADR = GND

0	1	1	0	A1	A0	1
---	---	---	---	----	----	---

Internal addressing mode: The address can be easily change by solder the bridge between the middle pad of “ADR” to VCC or GND at the bottom of the module. These two options allow up to two devices to share the same I²C bus.




However, if you wish to connect more than two modules on the bus, the external address can be use to connect up to four modules. That is total of 16-digit. To use external address selection, remove all of the solder bridge from ADR pads. Connect voltage to the ADR pin 5 according to the table below.

ADR Voltage	Read Address	Write Address
GND	70	71
3/8 VCC	72	73
5/8 VCC	74	75
VCC	76	77

Power-on LED:

The green LED on the module is illuminating when the power applied. The power-on LED is enabled from the manufacture. It can be disabling for light sensitive or low current requirement application by remove the solder bridge on “LED” at the bottom of the module.



DISABLE this option when VCC is higher than 8.0VDC.



I²C pull-up resistors:

I²C bus specification required to have pull-up resistors on SDA and SCL pin. I2C-7SEG come with these two pull-up resistors enabled from the manufacture. It can be disabling when connect to I²C bus that already have pull-up resistors by remove the solder bridge on “I2CPU” at the bottom of the module.




I2C-7SEG™ I²C 4-DIGIT 7-SEGMENT DISPLAY User Manual

Below are the default settings from the manufacture.

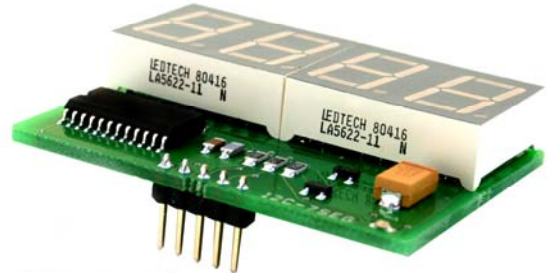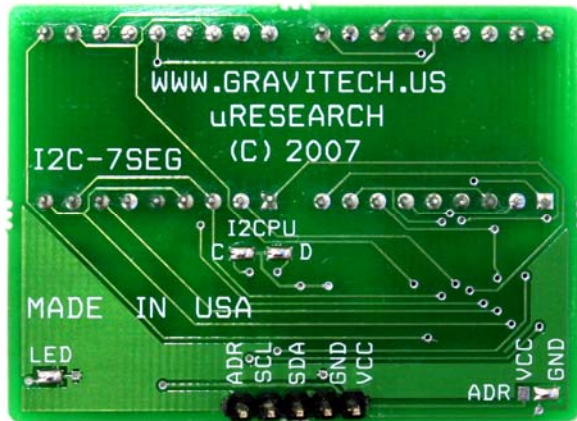


uResearch

© 2007 Copyright, All Rights Reserved

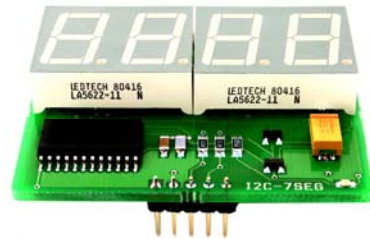

uResearch

© 2007 Copyright, All Rights Reserved

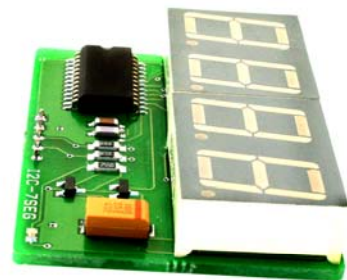

uResearch

© 2007 Copyright, All Rights Reserved

Copyright © 2007 MicroResearch
GRAVITECH GROUP WWW.GRAVITECH.US

I2C-7SEG™ I²C 4-DIGIT 7-SEGMENT DISPLAY User Manual

Notes

Contact Us

We maintain a website where you can get information on our products, obtain literature and download support files. Visit us online at:

WWW.GRAVITECH.US

Use our online Forum or e-mail your technical support questions to support@gravitech.us. We try to respond to your questions the same day.

For sales questions or to place and order, direct your e-mails to sales@gravitech.us. Refer to our website for product pricing, shipping rates, payment instructions, and for other info we need to complete your order.

Disclaimer: MicroResearch reserves the right to modify its products or literature, or to discontinue any product at any time without prior notice. The customer is responsible for determining the suitability of any device for any application developed using MicroResearch components.

Copyright © 2007 MicroResearch
GRAVITECH GROUP WWW.GRAVITECH.US



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.