

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0749525908

Status:


Active

Overview:

vhdm\_\_hsd

Description:

2.00mm (.079") Pitch 5-Row VHDM-HSD™ Backplane Header, Polarizing Pin Module, Code Key H, 40 Circuits

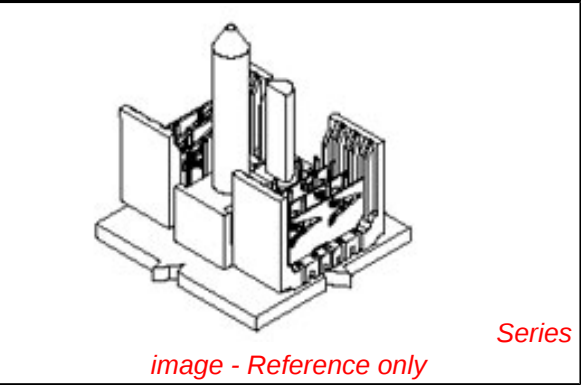

Documents:

[Drawing \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

[Product Specification PS-74031-999 \(PDF\)](#)

|                                    |                                                                                 |
|------------------------------------|---------------------------------------------------------------------------------|
| <b>General</b>                     |                                                                                 |
| Product Family                     | Backplane Connectors                                                            |
| Series                             | 74952                                                                           |
| Application                        | Backplane                                                                       |
| Application Tooling Documents      | <a href="http://www.molex.com/pdm_docs/ats/TM-622010999.pdf">Tooling Manual</a> |
| Comments                           | Position H, PCB Thickness 4.00mm (.157") to 9.00mm (.354")                      |
| Component Type                     | PCB Header                                                                      |
| Overview                           | vhdm__hsd                                                                       |
| Product Name                       | VHDM-HSD™                                                                       |
| Style                              | N/A                                                                             |
| <b>Physical</b>                    |                                                                                 |
| Circuits (Loaded)                  | N/A                                                                             |
| Durability (mating cycles max)     | 200                                                                             |
| First Mate / Last Break            | No                                                                              |
| Guide to Mating Part               | Yes                                                                             |
| Keying to Mating Part              | Yes                                                                             |
| Material - Metal                   | Stainless Steel                                                                 |
| Number of Columns                  | 6                                                                               |
| Number of Pairs                    | Open Pin Field                                                                  |
| Number of Rows                     | 0                                                                               |
| Orientation                        | Vertical                                                                        |
| PCB Locator                        | No                                                                              |
| PCB Retention                      | None                                                                            |
| PCB Thickness Recommended (in)     | 0.071 In                                                                        |
| PCB Thickness Recommended (mm)     | 1.80 mm                                                                         |
| Packaging Type                     | Bag                                                                             |
| Pitch - Mating Interface (in)      | 0.000 In                                                                        |
| Pitch - Mating Interface (mm)      | 0.00 mm                                                                         |
| Polarized to PCB                   | Yes                                                                             |
| Surface Mount Compatible (SMC)     | Yes                                                                             |
| Temperature Range - Operating      | N/A                                                                             |
| <b>Electrical</b>                  |                                                                                 |
| Current - Maximum per Contact      | N/A                                                                             |
| Data Rate                          | 5.0 Gbps                                                                        |
| Shield Type                        | N/A                                                                             |
| Shielded                           | No                                                                              |
| Voltage - Maximum                  | N/A                                                                             |
| <b>Material Info</b>               |                                                                                 |
| <b>Reference - Drawing Numbers</b> |                                                                                 |
| Product Specification              | PS-74031-999                                                                    |
| Sales Drawing                      | SD-74952-002                                                                    |

EU RoHS

China RoHS

Compliance Status

Not Reviewed

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

Need more information on product environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

74952Series

This document was generated on 05/28/2010

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1






| MATERIAL NUMBER<br>PCB THICKNESS<br>>4.0 - 9.0 | MATERIAL NUMBER<br>PCB THICKNESS<br>18 - 4.0 | BUSHING CLOCK POSITION |
|------------------------------------------------|----------------------------------------------|------------------------|
| 74952-5901                                     | 74952-5001                                   | A                      |
| 74952-5902                                     | 74952-5002                                   | B                      |
| 74952-5903                                     | 74952-5003                                   | C                      |
| 74952-5904                                     | 74952-5004                                   | D                      |
| 74952-5905                                     | 74952-5005                                   | E                      |
| 74952-5906                                     | 74952-5006                                   | F                      |
| 74952-5907                                     | 74952-5007                                   | G                      |
| 74952-5908                                     | 74952-5008                                   | H                      |

BILL OF MATERIAL FOR 74952-50\*\*

| ITEM | DESCRIPTION                  | QTY. |
|------|------------------------------|------|
| 1    | GUIDE PIN                    | 1    |
| 2    | GUIDANCE & POLARIZING MODULE | 1    |
| 3    | KEYING PIN                   | 1    |
| 4    | SCREW & WASHER (PCB 18-4.0)  | 1    |

BILL OF MATERIAL FOR 74952-59\*\*

| ITEM | DESCRIPTION                   | QTY. |
|------|-------------------------------|------|
| 1    | GUIDE PIN                     | 1    |
| 2    | GUIDANCE & POLARIZING MODULE  | 1    |
| 3    | KEYING PIN                    | 1    |
| 4    | SCREW & WASHER (PCB >4.0-9.0) | 1    |

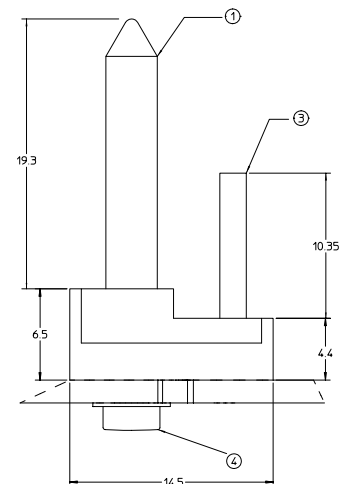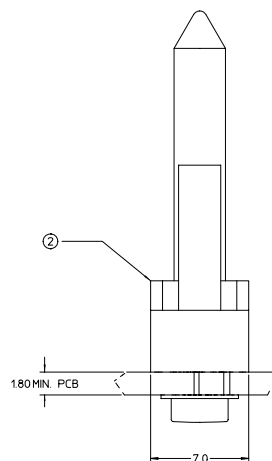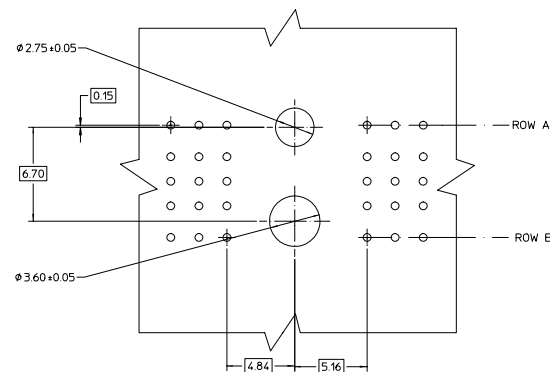

- NOTES:
1. MATERIAL:  
HOUSING: LIQUID CRYSTAL POLYMER (LCP),  
COLOR: BLACK  
GUIDE PIN / KEYING PIN: STAINLESS STEEL
  2. THIS PART CONFORMS TO MOLEX PRODUCT  
SPECIFICATION PS-74031-999.
  3. PACKAGING: STANDARD BULK PACK, 100 PER BAG  
PACKAGE SCREW SEPARATELY.

|                                                                                                                         |                 |                                                                                                                               |      |                  |                     |                                                                     |  |                           |  |                  |
|-------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------|------|------------------|---------------------|---------------------------------------------------------------------|--|---------------------------|--|------------------|
| EC NO. UDI2002-0216<br>DRWN: LMOSEY 2001/12/19<br>CHKD: SREED 2001/12/19<br>APPR: CBIXLER 2001/12/20<br>REV DESCRIPTION | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED)                                                                                         |      | SCALE 6:1        | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION                                              |  | REVISE ON CAD ONLY        |  |                  |
|                                                                                                                         |                 | mm                                                                                                                            | INCH | DIMENSION STYLE  |                     | TITLE                                                               |  |                           |  |                  |
|                                                                                                                         | 0               | 4 PLACES ± --- ± ---                                                                                                          |      | MM ONLY          |                     | BACKPLANE GUIDANCE AND POLARIZING MODULE<br>5 ROW HSD SALES DRAWING |  |                           |  |                  |
|                                                                                                                         |                 | 3 PLACES ± --- ± ---                                                                                                          |      | DRAWN BY DATE    |                     |                                                                     |  |                           |  |                  |
|                                                                                                                         |                 | 2 PLACES ± --- ± ---                                                                                                          |      | NMARTIN 01/12/11 |                     |                                                                     |  |                           |  |                  |
|                                                                                                                         |                 | 1 PLACE ± --- ± ---                                                                                                           |      | CHECKED BY DATE  |                     |                                                                     |  |                           |  |                  |
|                                                                                                                         | 0               | ANGULAR ± 2 °                                                                                                                 |      | SREED 01/12/11   |                     | MOLEX MOLEX INCORPORATED                                            |  |                           |  |                  |
|                                                                                                                         |                 | DRAFT WHERE APPLICABLE                                                                                                        |      | APPROVED BY DATE |                     |                                                                     |  |                           |  |                  |
|                                                                                                                         | 0               | MUST REMAIN WITHIN DIMENSIONS                                                                                                 |      | CBIXLER 01/12/11 |                     | MATERIAL NO. SEE CHART                                              |  | DOCUMENT NO. SD-74952-002 |  | SHEET NO. 1 OF 1 |
|                                                                                                                         |                 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |      |                  |                     |                                                                     |  |                           |  |                  |
| D                                                                                                                       |                 |                                                                                                                               |      |                  |                     |                                                                     |  |                           |  |                  |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.