

# Band-Master™ ATS


The Advanced Termination System for Interconnect Cable Shielding



High-volume pneumatic tool  
for bench use



Easy-to-use manual tools  
with built-in calibration counter

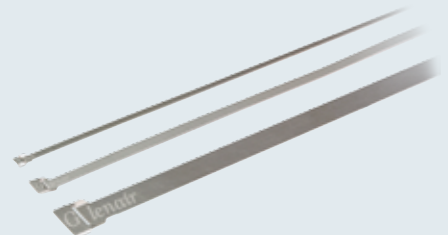

3 lengths and 3 widths of  
EMI braided termination bands

APRIL 2015

# Band-Master™ ATS

## Manual Tools and Bands



### Standard Banding Tool



#### The 601-100 Band-Master™ ATS Standard Tool with Counter for Standard Bands


Weighs 1.2 lbs., and is designed for .240" width clamping bands in a tension range from 100 to 180 lbs. Calibrate at 150 lbs.  $\pm$  5 lbs. for most shield terminations. Tool and band should never be lubricated.

#### The 600-058 QPL Qualified (M81306/1A) Standard Banding Tool without Counter



Weighs 1.1 and is designed for .240" width clamping bands in a tension range from 100 to 180 lbs. Calibrate at 150 lbs.  $\pm$  5 lbs. for most shield terminations. Tool and band should never be lubricated (not shown).

Color-coded tool handle:



= Standard; Black

Band-Master™ ATS Standard Band Selection						
Bands	Length		Part Number		Fits Diameter	
	In.	mm.	Flat	Pre-Coiled	In.	mm.
Short Standard	9.0	228.6	<a href="#">601-005</a>	<a href="#">601-006</a>	1.0	25.4
Medium Standard	14.25	361.95	<a href="#">601-040</a>	<a href="#">601-041</a>	1.8	45.7
Long Standard	18.0	457.2	<a href="#">601-049</a>	<a href="#">601-050</a>	2.5	63.5

Cable Pull Strength for BandMaster™ ATS Standard Bands							
Name	Material Type	Band Width		Band Thickness		Calibration Setting	Cable Pull Strength
		In	mm	In	mm		
Standard	300 SS	0.240	6.10	.020	.51	150 $\pm$ 5 lbs	per AS85049/128

QPL Qualified Standard Band Selection						
Bands	Length		Mil Spec Part Number		Fits Diameter	
	in.	mm.	Flat	Pre-Coiled	in.	mm.
Standard Band	14.25	361.95	<a href="#">M85049/128-3</a>	<a href="#">M85049/128-4</a>	1.8	45.7

Cable Pull Strength for Standard QPL Qualified Bands							
Name	Material Type	Band Width		Band Thickness		Calibration Setting	Cable Pull Strength
		In	mm	In	mm		
Standard	300 SS	0.240	6.10	.020	.51	150 $\pm$ 5 lbs	per AS85049/128




## Standard Bands

### Short Flat 601-005

### Short Precoiled 601-006


Standard bands are precision constructed of 300 Series SST passivate IAW AMS 2700. Short standard bands are 9.00 inches (228.6) in length and designed for use with the Band-Master™ ATS 601-100 manual banding tool or the 601-104 pneumatic banding tool. Bands should always be double wrapped and will accommodate diameters up to approximately 1.0 inches (25.4).

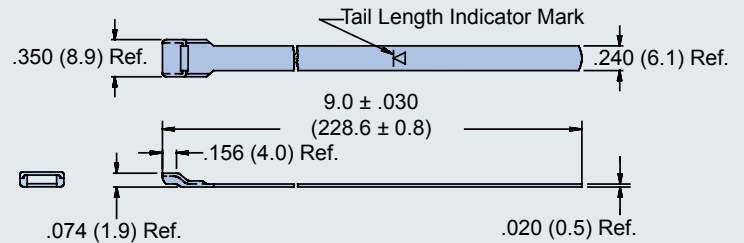

### Medium Flat 601-040

### Medium Precoiled 601-041


Standard bands are precision constructed of 300 Series SST passivate IAW AMS 2700. Medium standard bands are 14.25 inches (361.95) in length and designed for use with the Band-Master™ ATS 601-100 manual banding tool or the 601-104 pneumatic banding tool. Bands should always be double wrapped and will accommodate diameters up to approximately 1.8 inches (45.7).

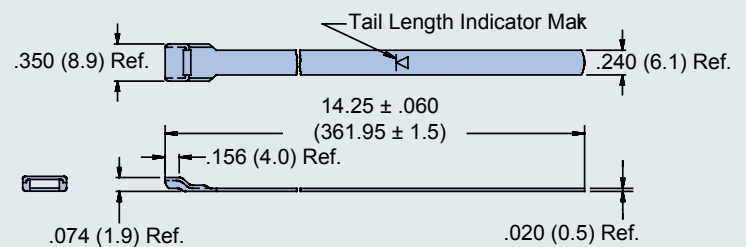

### Long Flat 601-049

### Long Precoiled 601-050

Standard bands are precision constructed of 300 Series SST passivate IAW AMS 2700. Long standard bands are 18.0 inches (457.2) in length and designed for use with the Band-Master™ ATS 601-100 manual banding tool or the 601-104 pneumatic banding tool. Bands should always be double wrapped and will accommodate diameters up to approximately 2.5 inches (63.5).

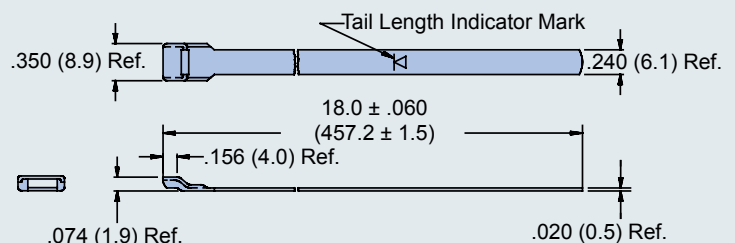

# Band-Master™ ATS

## Manual Tools and Bands



### Micro Banding Tool



#### The 601-101 Band-Master™ ATS Micro Tool with Counter for Micro Bands


Weighs 1.3 lbs., and is designed for micro .120" width clamping bands in a tension range from 50 to 85 lbs. Calibrate at 80 lbs  $\pm$  3 lbs. for most shield terminations. Tool and band should never be lubricated.

#### The 600-061 QPL Qualified (M81306/1B) Micro Banding Tool without Counter



Weighs 1.1 and is designed for micro .120" width clamping bands in a tension range from 60 to 85 lbs. Calibrate at 80 lbs  $\pm$  5 lbs. for most shield terminations. Tool and band should never be lubricated (not shown).

Color-coded tool handle:



= Micro; Blue

Band-Master™ ATS Micro Band Selection						
Bands	Length		Part Number		Fits Diameter	
	in.	mm.	Flat	Pre-Coiled	in.	mm.
Short Micro	5.0	127.0	<a href="#">601-024</a>	<a href="#">601-025</a>	0.5	12.7
Medium Micro	8.125	206.38	<a href="#">601-060</a>	<a href="#">601-061</a>	.88	22.4
Long Micro	14.25	361.95	<a href="#">601-064</a>	<a href="#">601-065</a>	1.8	45.7

Cable Pull Strength for Band-Master™ ATS Micro Bands							
Name	Material Type	Band Width		Band Thickness		Calibration Setting	Cable Pull Strength
		In	mm	In	mm		
Micro	300 SS	0.120	3.05	.015	.38	80 $\pm$ 5 lbs	per AS85049/128

QPL Qualified Micro Band Selection						
Bands	Length		Part Number		Fits Diameter	
	in.	mm.	Flat	Pre-Coiled	in.	mm.
Standard Micro	8.125	206.38	<a href="#">M85049/128-7</a>	<a href="#">M85049/128-8</a>	.88	22.4

Cable Pull Strength for Micro QPL Qualified Bands							
Name	Material Type	Band Width		Band Thickness		Calibration Setting	Cable Pull Strength
		In	mm	In	mm		
Micro	300 SS	0.120	3.05	.015	.38	80 $\pm$ 5 lbs	per AS85049/128






## Micro Bands

### Short Flat 601-024

### Short Precoiled 601-025


Micro Bands are precision constructed of 300 Series SST passivate IAW AMS 2700. Short micro bands are 5.00 inches (127) in length and designed for use with the Band-Master™ 601-101 hand banding tool or the 601-105 pneumatic banding tool. Bands should always be double wrapped and will accommodate diameters up to approximately .5 inches (12.7).

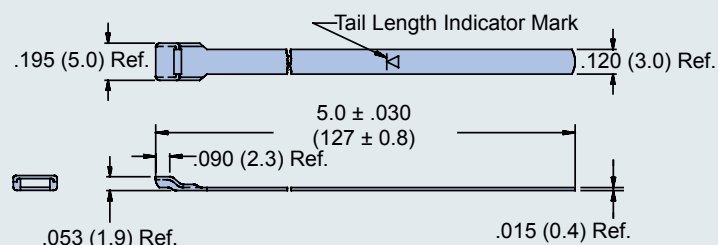

### Medium Flat 601-060

### Medium Precoiled 601-061


Micro Bands are precision constructed of 300 Series SST passivate IAW AMS 2700. Medium micro bands are 8.00 inches (203.2) in length and designed for use with the Band-Master™ 601-101 hand banding tool or the 601-105 pneumatic banding tool. Bands should always be double wrapped and will accommodate diameters up to approximately .88 inches (22.4).

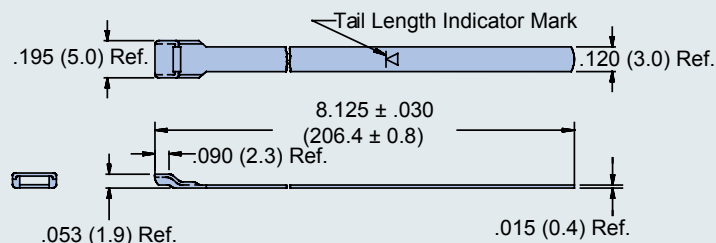

### Long Flat 601-064

### Long Precoiled 601-065

Micro Bands are precision constructed of 300 Series SST passivate IAW AMS 2700. Long Micro Bands are 14.00 inches (355.6) in length and designed for use with the Band-Master™ 601-101 hand banding tool or the 601-105 pneumatic banding tool. Bands should always be double wrapped and will accommodate diameters up to approximately 1.88 inches (47.8).

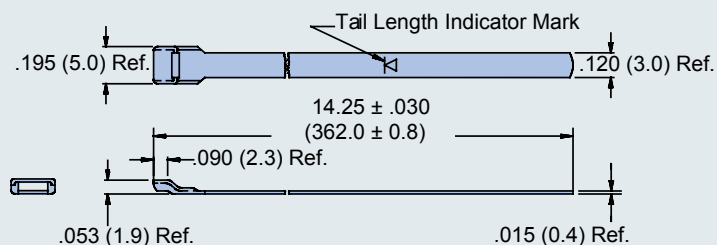

# Band-Master™ ATS

## Manual Tools and Bands




### Nano Banding Tool



#### The 601-108 Band-Master™ ATS Nano Tool with Counter for Nano Bands

Weighs 1.2 lbs., and is designed for nano flat .075" width clamping bands in a tension range from 20 to 50 lbs. Calibrate at 50 lbs.  $\pm$  3 lbs. for most shield terminations. Tool and band should never be lubricated.

Color-coded tool handle:



= Nano; Green

Band-Master™ ATS Nano Band Selection						
Bands	Length		Part Number		Fits Diameter	
	in.	mm.	Flat	Pre-Coiled	in.	mm.
Short Nano	6.0	152.4	<a href="#">601-500</a>	<a href="#">601-501</a>	.60	15.2
Medium Nano	9.0	228.6	<a href="#">601-504</a>	<a href="#">601-505</a>	.94	23.9
Long Nano	14.0	355.6	<a href="#">601-508</a>	<a href="#">601-509</a>	1.8	45.7

Cable Pull Strength for Band-Master™ ATS Nano Bands						
Name	Material Type	Band Width		Band Thickness		Cable Pull Strength
		In.	mm.	In.	mm.	
Nano	300 SS	0.075	1.91	.009	.23	50 $\pm$ 3 lbs

\* Nano Bands are work hardened to achieve higher cable pull force




## Nano Bands

### Short Flat 601-500

### Short Precoiled 601-501


Nano Bands are precision constructed of work hardened, 300 Series SST passivate IAW AMS 2700. Short nano bands are 6.00 inches (152.4) in length and designed for use with the 601-108 Band-Master™ ATS hand banding tool. Bands should always be double wrapped and will accommodate diameters up to approximately .60 inches (15.2).

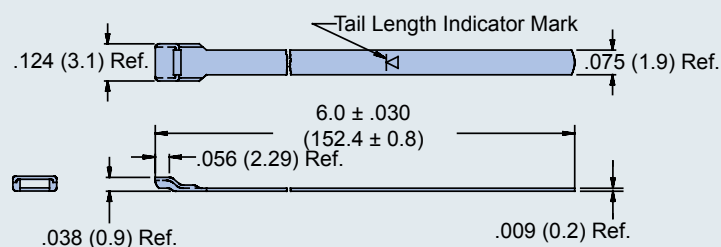

### Medium Flat 601-504

### Medium Precoiled 601-505


Nano Bands are precision constructed of work hardened, 300 Series SST passivate IAW AMS 2700. Medium nano bands are 9.00 inches (228.6) in length and designed for use with the 601-108 Band-Master™ ATS hand banding tool. Bands should always be double wrapped and will accommodate diameters up to approximately .94 inches (23.9).

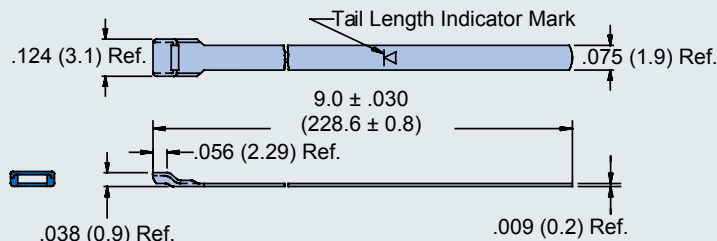

### Long Flat 601-508

### Long Precoiled 601-509

Nano Bands are precision constructed of work hardened, 300 Series SST passivate IAW AMS 2700. Long nano bands are 14.25 inches (361.95) in length and designed for use with the 601-108 Band-Master™ ATS hand banding tool. Bands should always be double wrapped and will accommodate diameters up to approximately 1.8 inches (45.7).

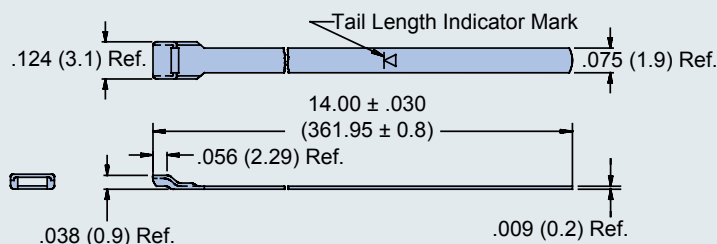

# Band-Master™ ATS


## Manual Tools and Bands



### Slim Banding Tool



Color-coded tool handle



= Slim Standard; Orange

**Choose Glenair Slim Bands for size and weight savings. Slim bands are 50% lighter with 50% lower profile than our standard bands, while maintaining similar performance.**

#### The 601-109 Band-Master™ ATS Slim Tool with Counter for Slim Bands

weighs 1.2 lbs., and is designed for slim standard flat .24" width clamping bands in a tension range from 50 to 100 lbs.  $\pm$  3 lbs. for most shield terminations. Tool and band should never be lubricated.

Band-Master™ ATS Slim Band Selection						
Bands	Length		Part Number		Fits Diameter	
	in.	mm.	Flat	Pre-Coiled	in.	mm.
Short Slim Standard	9.0	228.6	<b>601-570</b>	<b>601-571</b>	.94	23.9
Medium Slim Standard	14.25	361.95	<b>601-572</b>	<b>601-573</b>	1.8	45.7

Cable Pull Strength for Band-Master™ ATS Slim Standard Bands						
Name	Material Type	Band Width		Band Thickness		Cable Pull Strength
		In	mm	In	mm	
Slim Standard	300 Series SST	0.240	6.09	.010	.25	100 lbs. $\pm$ 3 lbs.

\* Slim Bands are work hardened to achieve higher cable pull force






## Slim Standard Bands

### Short Flat 601-570

### Short Precoiled 601-571


Slim Standard Bands are 50% lighter and 50% lower-profile than standard bands. They are precision constructed of work hardened, 300 Series SST passivate IAW AMS 2700. Short slim bands are 9.00 inches (228.6) in length and designed for use with the 601-109 Band-Master™ ATS hand banding tool or the 601-110 pneumatic tool. Bands should always be double wrapped and will accommodate diameters up to approximately .94 inches (23.9).

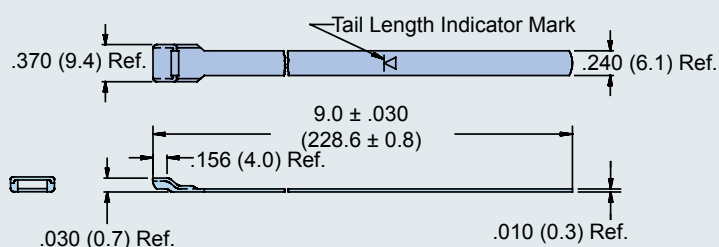

### Medium Flat 601-572

### Medium Precoiled 601-573


Slim Standard Bands are 50% lighter and 50% lower-profile than standard bands. They are precision constructed of work hardened, 300 Series SST passivate IAW AMS 2700. Medium slim bands are 14.25 inches (228.6) in length and designed for use with the 601-109 Band-Master™ ATS hand banding tool or the 601-110 pneumatic tool. Bands should always be double wrapped and will accommodate diameters up to approximately 1.8 inches (45.7).

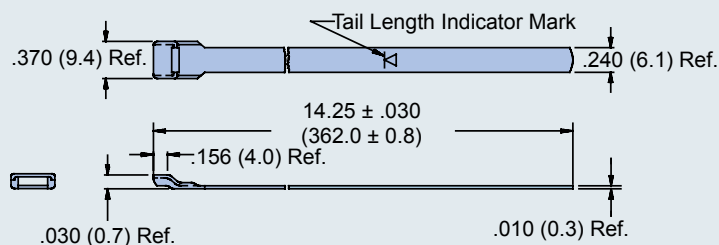

# Band-Master™ ATS

## Replacement Parts and Calibration Tools for Manual Banding Tools

### Cut Off Blade Kits and Knives

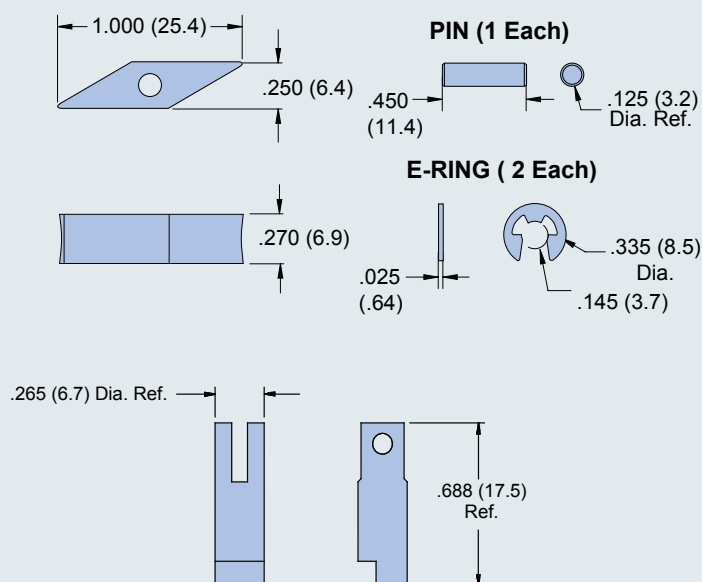


#### 601-302 Standard Cut-Off Blade Kit

**The 601-302 Standard Cut-Off Blade Kit** consists of the blade, two E-rings and one pin, providing all parts needed to replace the cut-off blade on the 601-100 Band-Master™ ATS standard manual banding tools and the 601-104 standard pneumatic banding tool. Material is heat treated steel finished with black oxide and rust preventative.

*Note: E-Rings supplied are for body of tool*

#### 601-301 Standard Cutter Knife

**The 601-301 Standard Cutter Knife** replaces the cutter knife on the 601-100 Band-Master™ ATS standard manual banding tool and the 601-104 standard pneumatic banding tool. Material is heat treated steel finished with black oxide and rust preventative.

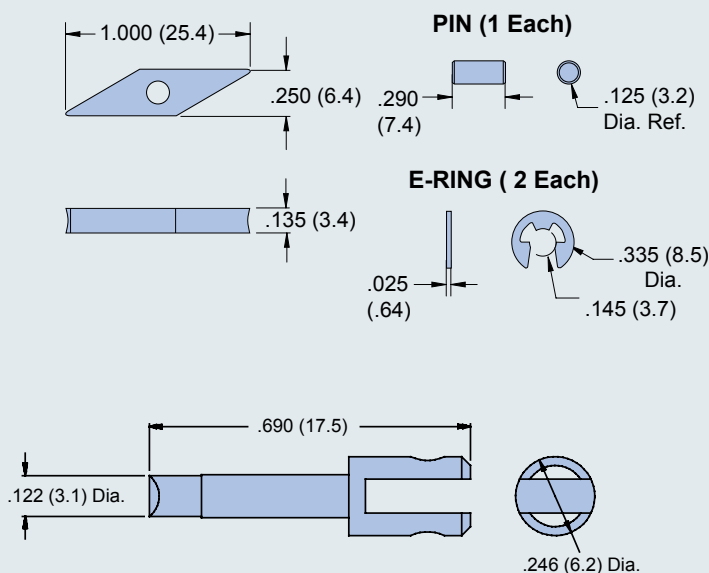

#### 601-305 Micro Cut-Off Blade Kit

**The 601-305 Micro Cut-Off Blade Kit** consists of the blade, two E-rings and one pin, providing all parts needed to replace the cut-off blade on the 601-101 Micro Band-Master™ ATS manual banding tool and the 601-105 pneumatic micro banding tool. Material is heat treated steel finished with black oxide and rust preventative.


*Note: E-Rings supplied are for body of tool*

#### 601-303 Micro Cutter Knife

**The 601-303 Micro Cutter Knife** replaces the cutter knife on the 601-101 Micro Band-Master™ ATS Micro manual banding tool, and the 600-105 pneumatic banding tool. Material is heat treated steel finished with black oxide and rust preventative.



## Calibration Keys and Tension Gauges

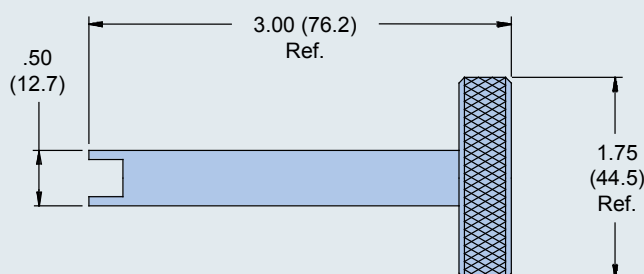

### 601-205 Calibration Key

**The 601-205 Calibration Key** is designed for use with 600-058, 600-061, 601-211 and 601-212 manual banding tools. Material is black anodized aluminum alloy. One full turn clockwise will advance the tension range approximately 1.0 - 2.5 lbs, a counter-clockwise turn will decrease tension by the same amount.




Verification inspection indicator window

Note: the band tool is within tolerance if no part of the stripes (above or below) appear in the verification inspection indicator window



### 601-211 and 601-212 Tension Gauge

**The 601-211 (M81306/1C) and 601-212 (M81306/1D) Tension Gauge** is used to check and calibrate the manual tool to values noted on calibration sticker. Constructed of hardened steel.

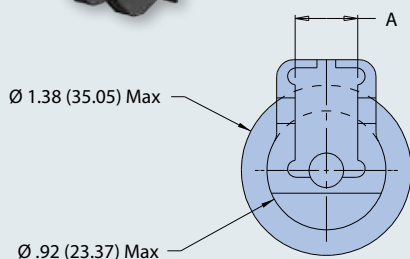

Above tolerance limit stripe (not visible when gauge is in the fixed position)

Below tolerance limit stripe (in view when gauge is in the fixed position)




Part No.	SAE Part No. (Ref)	A +.015 (0.38) -.005 (0.13)	Used with Manual Tool P/N
<b>601-211</b>	M81306/1C	.460 (11.68)	Standard 601-100 • 600-058 (M81306/1-01 Kit)
<b>601-212</b>	M81306/1D	.360 (9.14)	Micro 601-101 • 600-061 (M81306/1-02 Kit)
<b>601-205</b>	M81306/1E	N/A	Both

# Band-Master™ ATS

## Calibration Kits, Accessories and Pneumatic Banding Tools


### Calibration Kits and Accessories

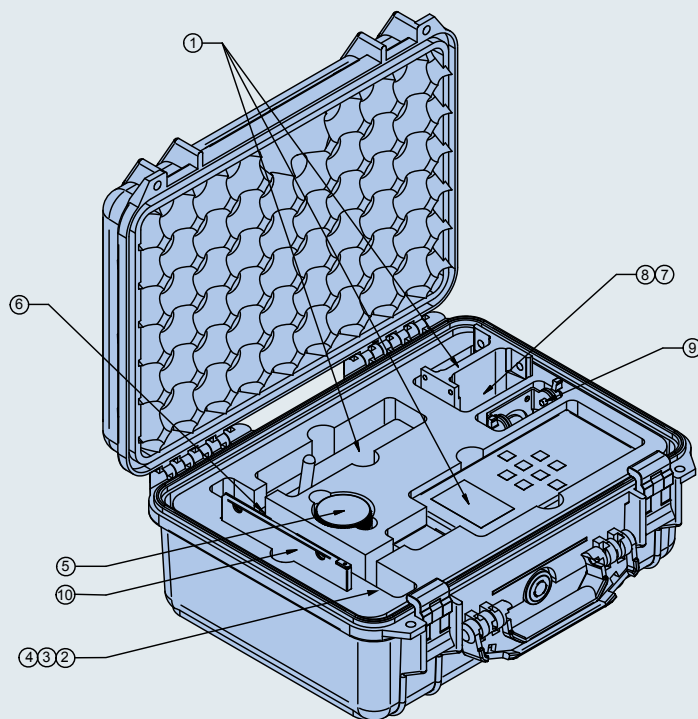

#### 601-200 Calibration Kit For All Banding Tools

**The 601-200 Calibration Kit** includes the (1) 601-200-3 calibration device, (2) fifty 601-203 Micro test bands, (3) fifty 601-202 Standard test bands, (4) fifty 601-217 Nano test bands, (5) 601-205 calibration key, (6) Standard tool adapter 601-218 for 601-100, 600-058 installed (7) Standard Pneumatic tool adapter 601-219 for 600-067, 601-104 (8) Micro tool adapter 601-220 for 601-101, 601-105, 601-108, 600-061, and 600-068 (9) Adjustable mounting bracket for meter (10) Data logging software

Range of the calibration device is 0 to 500 lbs, and accuracy is calibrated to  $\pm 1$  lbs. at factory. Digital readout in .1 lb. increments. Meter supplied with RS-232 serial communication port on rear of meter case. Serial/USB adapter cable included.

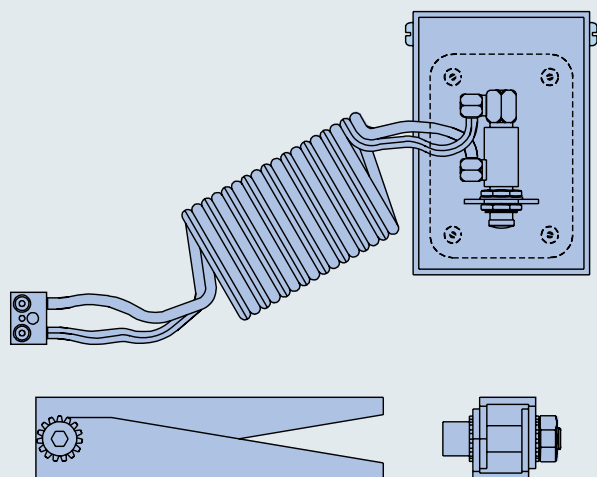

#### 601-400 Foot Pedal Control for 601-104, 601-105 and 601-118 Pneumatic Banding Tools

**The 601-400 Foot Pedal Control** frees both hands to help assure more accurate, reliable and faster shield terminations.





## Pneumatic Banding Tools

### High-Volume Pneumatic Bench-Mount Units and Calibration Kits Available for Standard, Micro and Nano Band Termination Systems

#### 601-104 Standard Pneumatic Banding Tool

**The 601-104 Standard Pneumatic Banding Tool** accommodates 601-005, 601-006, 601-052 and 601-054 standard bands in a tension range of from 100-180 lbs. Calibrate at  $150 \pm 5$  lbs for most shield terminations. Weight of the tool is 2.52 lbs (1.14 Kg); the control box weighs 3.51 lbs (1.59 Kg).



#### 601-105 Micro Pneumatic Banding Tool

**The 601-105 Micro Pneumatic Banding Tool** accommodates 601-024, 601-025, 600-057, 600-059 Micro Bands in a tension range of from 60 to 90 lbs. Calibrate at  $80 \pm 5$  lbs for most shield terminations. Weight of the tool is 2.52 lbs (1.14 Kg); the control box weighs 3.51 lbs (1.59 Kg).

#### 601-118 Nano Pneumatic Banding Tool


**The 601-118 Nano Pneumatic Banding Tool** accommodates 601-500, 601-501, 601-504, 601-505, 601-508 and 601-509 Nano bands in a tension range of from 30-90 lbs. Calibrate at  $50 \pm 3$  lbs for most shield terminations. Weight of the tool is 2.52 lbs (1.14 Kg); the control box weighs 3.51 lbs (1.59 Kg).

**Glenair now offers its pneumatic tools and foot pedal control in one easy to order kit. Contact factory for more information.**

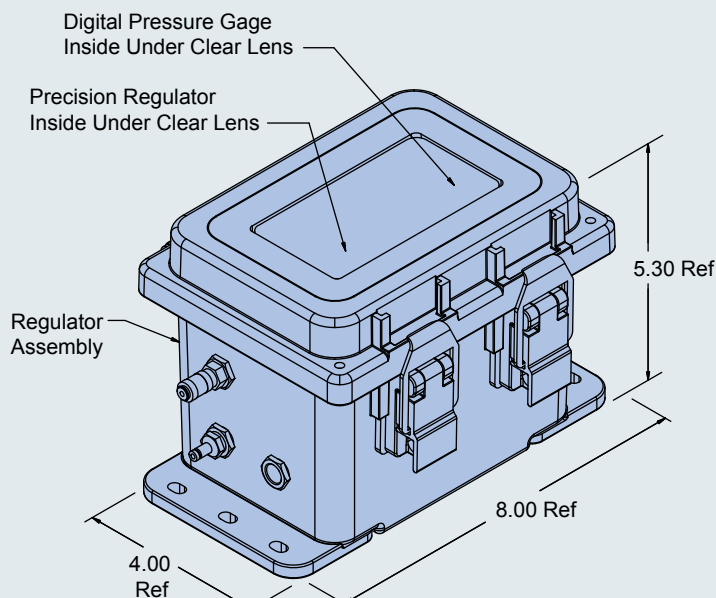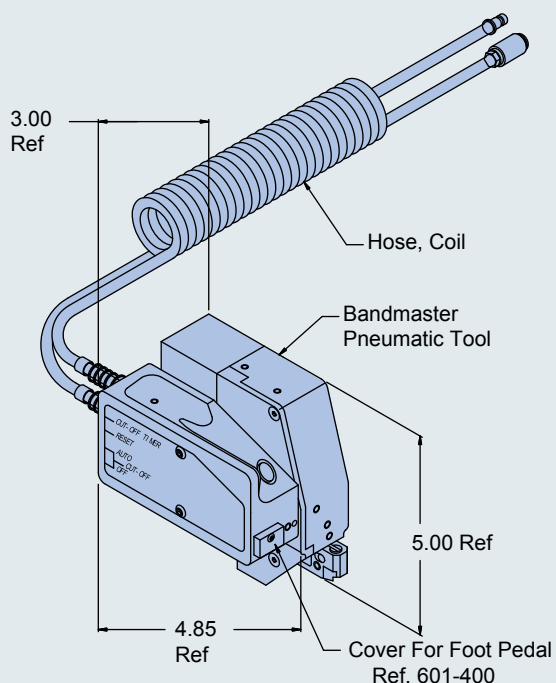

# Band-Master™ ATS

## Shield Termination Assembly Process

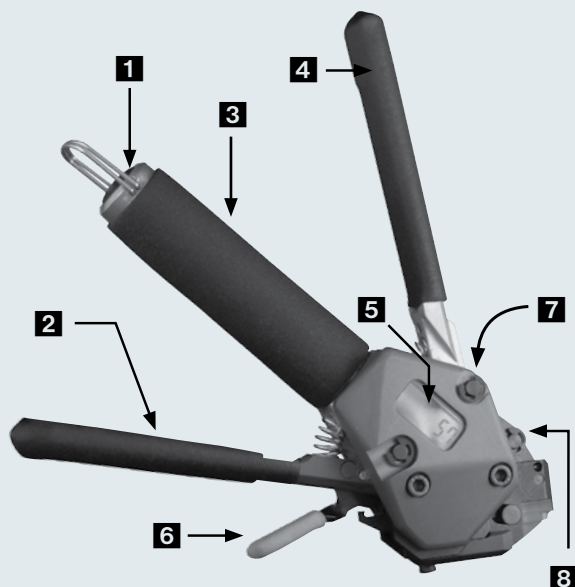

### 1 Calibration Access Plug

### 2 Tensioning Lever:

Squeeze with short gentle strokes to tighten band to the proper tension. Lever will lock to 3 Handle with final full stroke.

### 4 Cut-Off Lever:

Squeeze to lock band buckle and trim excess band material.

### 5 Cycle Counter

6 Band Insertion and Release Lever: Depress lever to insert or release band from tool.

### 7 Serial Number


### 8 Tension Release Lever

### NOTES:

1. Use only genuine Band-Master™ ATS bands. Other manufacturer's bands may damage tool.
2. Use only .240" wide bands with 601-100 tool and .120" wide bands with 601-101 tool.

### Video Training Series At:


<http://www.glenair.com/bandmaster/index.htm>

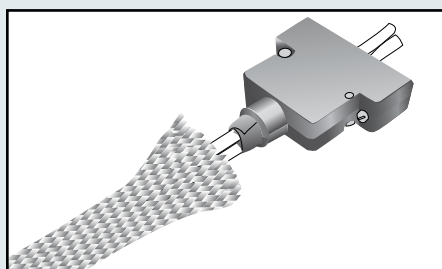

### Step 1


Prepare Cable Braid for termination process

**NOTE:** Complete banding on an unfixed cable assembly. Terminating a band to a clamped or fixtured cable will affect the applied forces and interfere with the cut-off operation. The cut-off operation causes a rotation of the band termination in order to lock the band.

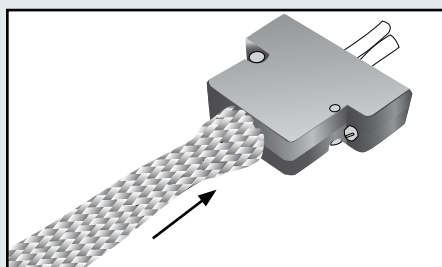

### Step 2

Push braid forward over banding platform. Milk braid as required to remove slack and ensure a snug fit around the shield termination area.

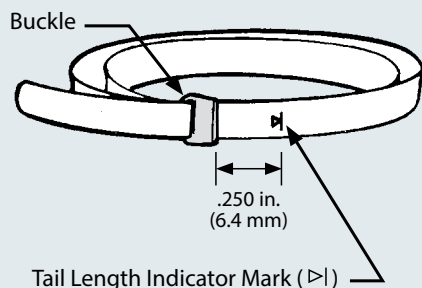


### Step 3

Double-wrap the band prior to use:

**NOTE:** Due to connector/adaptor circumference, it may be necessary to double-coil the band in place around the cable or termination area.

A. Loop/insert the leading edge of band through the buckle slot twice. (Bands *must* be double-wrapped.)

B. Tighten the coil until the indicator mark (▷|) is approximately .250 inches (6.4) shy of the buckle slot (see illustration at left). This will ensure sufficient band tail length for insertion into tool.

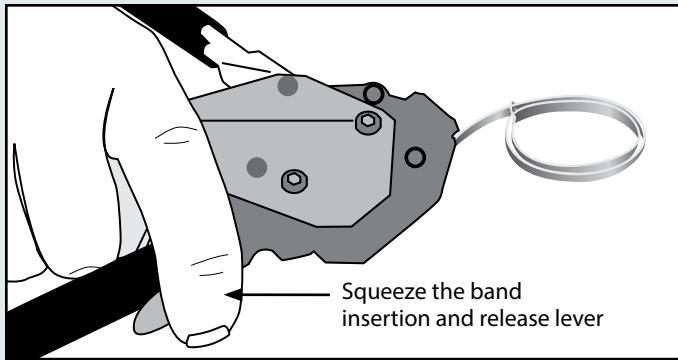



#### Step 4

Depress the band insertion and release lever (6), and insert the working end of the band into the front end opening of the tool, with the loop positioned outward as shown.

#### Step 5

The band termination area on all backshells is wider than the band. Position the band near the rear lip of the banding platform, allowing room for the buckle. For elliptical cable entries position the buckle off center of the peak of the circle. Failure to follow these guidelines will result in poor performance.

Position the band near the rear lip leaving room for buckle.

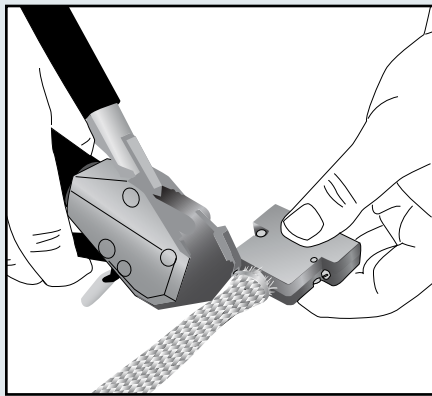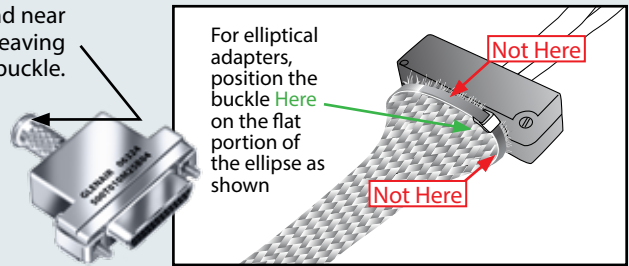

#### Step 6


Contract the band with the tensioning lever (2) using short, even strokes. As the band contracts firmly on the termination area, pull a full stroke to lock the lever against the main tool handle which will indicate the band is compressed to the proper tension.

**NOTE:** Overly rapid tightening of the band may result in uneven compression. If alignment of the band and shield is unsatisfactory, tension can be relaxed by pulling up on the tensioning lever (2) and then pushing the tension release lever (8) forward. Make adjustments as necessary and finish tightening with tensioning lever (2) as described above.

#### Step 7


Complete the clamping process by depressing the cut-off lever (4), allowing band and cable to rotate slightly. Pull up the release lever (6) to remove excess band for disposal.

**NOTE:** Always band on an unfixtured connector/cable assembly.

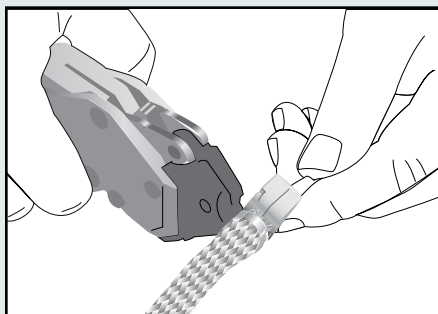

#### Step 8


Trim away excess braid from the forward groove, particularly if a shrink boot is to be applied to the assembly.

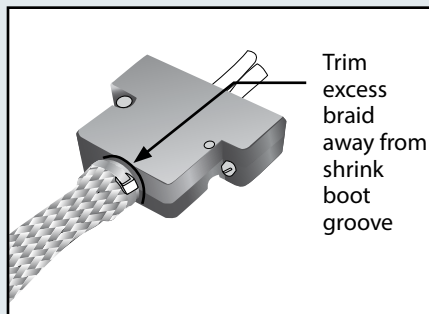

#### Step 9

Visually inspect shield termination for problems.

**NOTE:** Band can be removed by lifting the buckle with a screwdriver or diagonal cutters.

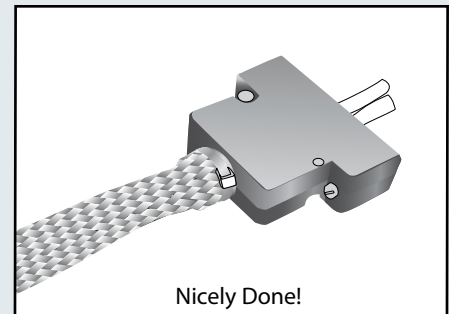



HEAVY-DUTY

# Interconnect Assembly Tools

The right tool for every interconnect  
assembly requirement







**G**lenair offers its connector and connector accessory customers every convenience in the provision of contact termination, shield termination, and backshell-to-connector assembly tooling. We are also proud to offer branded solutions from other well-known tool manufacturers such as Daniels (DMC) crimp tools. From pneumatic Earth-Bond tooling for the rail industry, to fiber optic termination and test equipment, Glenair is your most knowledgeable and reliable source for special-purpose interconnect assembly tooling.

### Backshell-to-Connector Assembly Tools



### BandMaster™ ATS EMI/RFI Shield Termination System



Glenair, Inc.  
1211 Air Way  
Glendale, CA  
91201-2497  
818-247-6000  
sales@glenair.com  
www.glenair.com



## *Out of This World* **INTERCONNECT SOLUTIONS**

### **Glenair, Inc.**

1211 Air Way • Glendale, California • 91201-2497

Telephone: 818-247-6000 • Fax: 818-500-9912 • [sales@glenair.com](mailto:sales@glenair.com)

**[www.glenair.com](http://www.glenair.com)**

---

#### **Glenair Power Products Group**

860 N. Main Street Extension  
Wallingford, CT  
06492

Telephone:  
203-741-1115  
Facsimile:  
203-741-0053  
[sales@glenair.com](mailto:sales@glenair.com)

---

#### **Glenair UK Ltd**

40 Lower Oakham Way  
Oakham Business Park  
P.O. Box 37, Mansfield  
Notts, NG18 5BY England

Telephone:  
+44-1623-638100  
Facsimile:  
+44-1623-638111  
[sales@glenair.co.uk](mailto:sales@glenair.co.uk)

---

#### **Glenair Microway Systems**

7000 North Lawndale Avenue  
Lincolnwood, IL  
60712

Telephone:  
847-679-8833  
Facsimile:  
847-679-8849

---

#### **Glenair Nordic AB**

Gustav III : S Boulevard 46  
SE-169 27 Solna  
Sweden

Telephone:  
+46-8-50550000  
[sales@glenair.se](mailto:sales@glenair.se)

---

#### **Glenair Electric GmbH**

Schaberweg 28  
61348 Bad Homburg  
Germany

Telephone:  
06172 / 68 16 0  
Facsimile:  
06172 / 68 16 90  
[germany@glenair.com](mailto:germany@glenair.com)

---

#### **Glenair Iberica**

C/ La Vega, 16  
45612 Velada  
Spain

Telephone:  
+34-925-89-29-88  
Facsimile:  
+34-925-89-29-87  
[sales@glenair.es](mailto:sales@glenair.es)

---

#### **Glenair Italia S.p.A.**

Via Del Lavoro, 7  
40057 Quarto Inferiore –  
Granarolo dell'Emilia  
Bologna, Italy

Telephone:  
+39-051-782811  
Facsimile:  
+39-051-782259  
[info@glenair.it](mailto:info@glenair.it)

---

#### **Glenair France SARL**

7, Avenue Parmentier  
Immeuble Central Parc #2  
31200 Toulouse  
France

Telephone:  
+33-5-34-40-97-40  
Facsimile:  
+33-5-61-47-86-10  
[sales@glenair.fr](mailto:sales@glenair.fr)

---

#### **Glenair Korea**

B-1304 Gunpo IT Valley  
148 Gosan-Ro, Gunpo-Si  
Kyunggi-Do, Korea  
435-733

Telephone:  
+82-31-8068-1090  
Facsimile:  
+82-31-8068-1092  
[sales@glenair.kr](mailto:sales@glenair.kr)





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.