

Aluminum Capacitors Power Ultra Long Life Snap-In




Fig.1 Component outlines



| QUICK REFERENCE DATA | |
|---|----------------------|
| DESCRIPTION | VALUE |
| Nominal case sizes (Ø D x L in mm) | 22 x 25 to 35 x 50 |
| Rated capacitance range (E6/E12 series), C _R | 560 µF to 47 000 µF |
| Tolerance on C _R | ± 20 % |
| Rated voltage range, U _R | 16 V to 100 V |
| Category temperature range | - 40 °C to + 105 °C |
| Endurance test at 105 °C | 2000 hours |
| Useful life at 105 °C | 5000 hours |
| Useful life at 40 °C, 1.9 x I _R applied | 125 000 hours |
| Shelf life at 0 V, 105 °C | 500 hours |
| Based on sectional specification | IEC 60384-4/EN130300 |
| Climatic category IEC 60068 | 40/105/56 |

FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Large types, very small dimensions, cylindrical aluminum case, insulated with a blue sleeve
- Low ESR, high ripple current capability
- Long useful life: up to 5000 hours at 105 °C
- Keyed polarity version available


**RoHS
COMPLIANT**
APPLICATIONS

- General purpose, industrial telecommunication and audio/video systems
- Smoothing and filtering
- Standard and switched mode power supplies
- Energy storage in pulse systems

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in µF)
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (M for ± 20 %)
- Rated voltage (in V)
- Date code (YYMM)
- Name of manufacturer
- Code for factory of origin
- ‘-’ sign to identify the negative terminal, visible from the top and side of the capacitor
- Code number
- Climatic category in accordance with IEC 60068

| SELECTION CHART FOR C _R , U _R AND RELEVANT NOMINAL CASE SIZES (Ø D x L in mm) | | | | | | | |
|---|--------------------|----|---------|---------|---------|---------|---------|
| C _R (µF) | U _R (V) | | | | | | |
| | 16 | 25 | 40 | 50 | 63 | 80 | 100 |
| 560 | - | - | - | - | - | - | 22 x 25 |
| 820 | - | - | - | - | - | 22 x 25 | 22 x 30 |
| 1000 | - | - | - | - | - | - | 22 x 35 |
| | - | - | - | - | - | - | 25 x 30 |
| 1200 | - | - | - | - | 22 x 25 | 22 x 30 | 25 x 35 |
| 1500 | - | - | - | 22 x 25 | 22 x 30 | 22 x 35 | - |
| | - | - | - | - | - | 25 x 30 | 25 x 40 |
| 1800 | - | - | - | - | - | 25 x 35 | - |
| | - | - | - | - | - | - | 30 x 30 |
| 2200 | - | - | 22 x 25 | 22 x 30 | 22 x 35 | 25 x 40 | 30 x 35 |
| | - | - | - | - | 25 x 30 | 30 x 30 | - |

| SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES ($\varnothing D \times L$ in mm) | | | | | | | |
|---|-----------|---------|---------|---------|---------|---------|---------|
| C_R (μF) | U_R (V) | | | | | | |
| | 16 | 25 | 40 | 50 | 63 | 80 | 100 |
| 2700 | - | - | - | 22 x 35 | - | - | 30 x 40 |
| | - | - | - | 25 x 30 | 25 x 35 | 30 x 35 | - |
| 3300 | - | 22 x 25 | 22 x 30 | - | 25 x 40 | 25 x 50 | 30 x 50 |
| | - | - | - | 25 x 35 | 30 x 30 | - | 35 x 35 |
| 3900 | - | - | 22 x 35 | 22 x 45 | - | 30 x 40 | 35 x 40 |
| | - | - | 25 x 30 | 25 x 40 | 30 x 35 | - | - |
| 4700 | - | 22 x 30 | 22 x 40 | - | 30 x 40 | 35 x 35 | 35 x 50 |
| | - | - | - | 30 x 30 | - | - | - |
| 5600 | 22 x 25 | - | - | 25 x 50 | - | 35 x 40 | - |
| | - | - | 25 x 35 | 30 x 35 | 35 x 35 | - | - |
| 6800 | - | 22 x 35 | - | 30 x 40 | 30 x 50 | 35 x 50 | - |
| | - | 25 x 30 | 30 x 30 | - | 35 x 40 | - | - |
| 8200 | 22 x 30 | 22 x 40 | 25 x 50 | - | 35 x 45 | - | - |
| | - | 25 x 35 | 30 x 35 | 35 x 35 | - | - | - |
| 10 000 | 22 x 35 | 25 x 40 | 30 x 40 | 35 x 40 | 35 x 50 | - | - |
| | 25 x 30 | 30 x 30 | 35 x 30 | - | - | - | - |
| 12 000 | 22 x 40 | - | - | 35 x 45 | - | - | - |
| | 25 x 35 | 30 x 35 | 35 x 35 | - | - | - | - |
| 15 000 | 25 x 40 | 30 x 40 | 35 x 45 | - | - | - | - |
| 18 000 | - | - | 35 x 50 | - | - | - | - |
| | 30 x 35 | 35 x 35 | - | - | - | - | - |
| 22 000 | 30 x 40 | 30 x 50 | - | - | - | - | - |
| 27 000 | - | 35 x 45 | - | - | - | - | - |
| | 35 x 35 | - | - | - | - | - | - |
| 33 000 | 30 x 50 | 35 x 50 | - | - | - | - | - |
| | 35 x 40 | - | - | - | - | - | - |
| 39 000 | 35 x 45 | - | - | - | - | - | - |
| 47 000 | 35 x 50 | - | - | - | - | - | - |

DIMENSIONS in millimeters **AND AVAILABLE FORMS**

TWO TERMINAL SNAP-IN

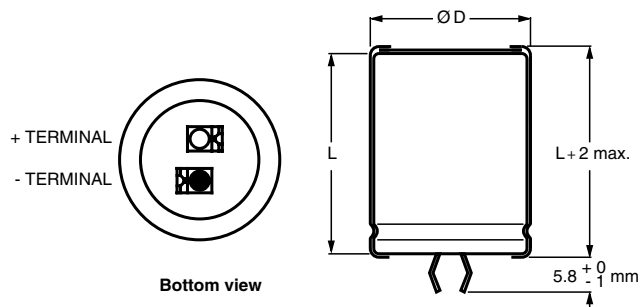


Fig.2 Two terminal snap-in





Fig.3 Mounting hole diagram


The minus terminal can be marked with a black dot or with an imprinted '-' sign.

THREE TERMINAL SNAP-IN

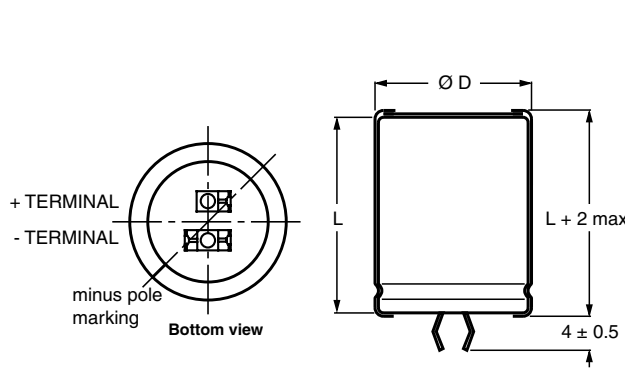

The negative terminal has **TWO** pins which are **BOTH** electrically connected.

Fig.4 Three terminal snap-in



The 10 mm spacing of the 2 pin snap-in is used as the base layout and a third hole is added.

The third hole is closer to the negative primary hole so that polarization is always maintained, together with added mechanical stability.

Fig.5 Mounting hole diagram

Table 1

| DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES | | | | | |
|--|-------------------------------|-------------------|----------|--------------------------------------|------------------------------------|
| NOMINAL CASE SIZE $\varnothing D \times L$ | $\varnothing D_{\text{max.}}$ | $L_{\text{max.}}$ | MASS (g) | PACKAGING QUANTITIES (units per box) | CARDBOARD BOX DIMENSIONS L x W x H |
| 22 x 25 | 23 | 27 | ≈ 12 | 100 | 260 x 250 x 39 |
| 22 x 30 | 23 | 32 | ≈ 16 | 100 | 260 x 250 x 44 |
| 22 x 35 | 23 | 37 | ≈ 20 | 100 | 260 x 250 x 49 |
| 22 x 40 | 23 | 42 | ≈ 23 | 100 | 260 x 250 x 54 |
| 25 x 30 | 26 | 32 | ≈ 22 | 100 | 290 x 280 x 44 |
| 25 x 35 | 26 | 37 | ≈ 24 | 100 | 290 x 280 x 49 |
| 25 x 40 | 26 | 42 | ≈ 27 | 100 | 290 x 280 x 54 |
| 25 x 50 | 26 | 52 | ≈ 38 | 100 | 290 x 280 x 64 |
| 30 x 30 | 31 | 32 | ≈ 30 | 100 | 340 x 330 x 44 |
| 30 x 35 | 31 | 37 | ≈ 35 | 100 | 340 x 330 x 49 |
| 30 x 40 | 31 | 42 | ≈ 40 | 100 | 340 x 330 x 54 |
| 30 x 50 | 31 | 52 | ≈ 50 | 100 | 340 x 330 x 64 |
| 35 x 35 | 36 | 37 | ≈ 48 | 50 | 390 x 198 x 49 |
| 35 x 40 | 36 | 42 | ≈ 55 | 50 | 390 x 198 x 54 |
| 35 x 45 | 36 | 47 | ≈ 63 | 50 | 390 x 198 x 59 |
| 35 x 50 | 36 | 52 | ≈ 72 | 50 | 390 x 198 x 64 |



| ELECTRICAL DATA | |
|-----------------|---|
| SYMBOL | DESCRIPTION |
| C_R | rated capacitance at 100 Hz |
| I_R | rated RMS ripple current at 100 Hz, 105 °C |
| I_{L5} | max. leakage current after 5 minutes at U_R |
| ESR | typ./max. equivalent series resistance at 100 Hz ⁽¹⁾ |
| Z | typ./max. impedance at 10 kHz |

Note

- ⁽¹⁾ ESR at 120 Hz is approximately 0.95 x ESR 100 Hz
- Unless otherwise specified, all electrical values in Table 2 apply at $T_{amb} = 20\text{ °C}$, $P = 86\text{ to }106\text{ kPa}$, $RH = 45\text{ to }75\%$

ORDERING EXAMPLE

Electrolytic capacitor 158 series
 3900 $\mu\text{F}/80\text{ V}$; $\pm 20\%$
 Nominal case size: $\varnothing 30 \times 40\text{ mm}$
 2-terminal snap-in:
 Ordering code: MAL2 158 32392 E3
 Former 12NC: 2222 158 32392
 3-terminal snap-in:
 Ordering code: MAL2 158 72392 E3
 Former 12NC: 2222 158 72392

Table 2

| ELECTRICAL DATA AND ORDERING INFORMATION | | | | | | | | | |
|--|--------------------------------------|--|----------------------------------|----------------------------------|---------------------------|--|-----------------------------------|----------------------------------|---------|
| U_R (V) | C_R 100 Hz (μF) | NOMINAL CASE SIZE $\varnothing D \times L$ (mm) | I_R 100 Hz 105 °C (A) | I_R 10 kHz 105 °C (A) | I_{L5} 5 min (mA) | MAX. ESR 100 Hz ⁽¹⁾ (m Ω) | MAX. Z 10 kHz (m Ω) | ORDERING CODE MAL2158..... | |
| | | | | | | | | 2-TERM. | 3-TERM. |
| 16 | 5600 | 22 x 25 | 2.50 | 2.95 | 0.18 | 111 | 98 | 15562E3 | 55562E3 |
| | 8200 | 22 x 30 | 3.10 | 3.66 | 0.27 | 79 | 70 | 15822E3 | 55822E3 |
| | 10 000 | 22 x 35 | 3.56 | 4.20 | 0.32 | 65 | 58 | 15103E3 | 55103E3 |
| | 10 000 | 25 x 30 | 3.42 | 4.04 | 0.32 | 70 | 63 | 25103E3 | 65103E3 |
| | 12 000 | 22 x 40 | 4.00 | 4.72 | 0.39 | 56 | 50 | 15123E3 | 55123E3 |
| | 12 000 | 25 x 35 | 3.91 | 4.61 | 0.39 | 59 | 53 | 25123E3 | 65123E3 |
| | 15 000 | 25 x 40 | 4.39 | 5.18 | 0.48 | 49 | 45 | 25153E3 | 65153E3 |
| | 15 000 | 30 x 30 | 3.80 | 4.48 | 0.48 | 61 | 55 | 35153E3 | 75153E3 |
| | 18 000 | 30 x 35 | 4.36 | 5.14 | 0.58 | 50 | 46 | 35183E3 | 75183E3 |
| | 22 000 | 30 x 40 | 4.85 | 5.72 | 0.71 | 43 | 39 | 35223E3 | 75223E3 |
| | 27 000 | 35 x 35 | 4.49 | 5.30 | 0.87 | 49 | 43 | 45273E3 | 85273E3 |
| | 33 000 | 30 x 50 | 5.70 | 6.73 | 1.06 | 33 | 31 | 35333E3 | 75333E3 |
| | 33 000 | 35 x 40 | 4.97 | 5.86 | 1.06 | 42 | 37 | 45333E3 | 85333E3 |
| | 39 000 | 35 x 45 | 5.42 | 6.40 | 1.25 | 37 | 33 | 45393E3 | 85393E3 |
| 47 000 | 35 x 50 | 5.80 | 6.84 | 1.51 | 33 | 30 | 45473E3 | 85473E3 | |
| 25 | 3300 | 22 x 25 | 2.27 | 2.68 | 0.17 | 130 | 105 | 16332E3 | 56332E3 |
| | 4700 | 22 x 30 | 2.82 | 3.33 | 0.24 | 93 | 76 | 16472E3 | 56472E3 |
| | 6800 | 22 x 35 | 3.37 | 3.98 | 0.34 | 69 | 57 | 16682E3 | 56682E3 |
| | 6800 | 25 x 30 | 3.25 | 3.84 | 0.34 | 74 | 62 | 26682E3 | 66682E3 |
| | 8200 | 22 x 40 | 3.79 | 4.47 | 0.41 | 58 | 49 | 16822E3 | 56822E3 |
| | 8200 | 25 x 35 | 3.72 | 4.39 | 0.41 | 62 | 52 | 26822E3 | 66822E3 |
| | 10 000 | 25 x 40 | 4.18 | 4.93 | 0.50 | 52 | 44 | 26103E3 | 66103E3 |
| | 10 000 | 30 x 30 | 3.65 | 4.31 | 0.50 | 64 | 55 | 36103E3 | 76103E3 |
| | 12 000 | 30 x 35 | 4.19 | 4.94 | 0.60 | 53 | 46 | 36123E3 | 76123E3 |
| | 15 000 | 30 x 40 | 4.66 | 5.50 | 0.75 | 45 | 39 | 36153E3 | 76153E3 |
| | 18 000 | 35 x 35 | 4.36 | 5.14 | 0.90 | 51 | 43 | 46183E3 | 86183E3 |
| | 22 000 | 30 x 50 | 5.52 | 6.51 | 1.10 | 35 | 31 | 36223E3 | 76223E3 |
| | 22 000 | 35 x 40 | 4.83 | 5.70 | 1.10 | 44 | 37 | 46223E3 | 86223E3 |
| | 27 000 | 35 x 45 | 5.24 | 6.18 | 1.35 | 39 | 33 | 46273E3 | 86273E3 |
| 33 000 | 35 x 50 | 5.32 | 6.27 | 1.65 | 36 | 31 | 46333E3 | 86333E3 | |



Aluminum Capacitors
Power Ultra Long Life Snap-In

Vishay BCcomponents

| ELECTRICAL DATA AND ORDERING INFORMATION | | | | | | | | | |
|--|----------------------------------|---|---|---|----------------------------------|---|--------------------------|----------------------------------|---------|
| U _R (V) | C _R 100 Hz (µF) | NOMINAL CASE SIZE Ø D x L (mm) | I _R 100 Hz 105 °C (A) | I _R 10 kHz 105 °C (A) | I _{L5} 5 min (mA) | MAX. ESR 100 Hz ⁽¹⁾ (mΩ) | MAX. Z 10 kHz (mΩ) | ORDERING CODE MAL2158..... | |
| | | | | | | | | 2-TERM. | 3-TERM. |
| 40 | 2200 | 22 x 25 | 2.17 | 2.65 | 0.18 | 131 | 100 | 17222E3 | 57222E3 |
| | 3300 | 22 x 30 | 2.73 | 3.33 | 0.27 | 91 | 70 | 17332E3 | 57332E3 |
| | 3900 | 22 x 35 | 3.12 | 3.81 | 0.32 | 77 | 59 | 17392E3 | 57392E3 |
| | 3900 | 25 x 30 | 3.02 | 3.68 | 0.32 | 83 | 65 | 27392E3 | 67392E3 |
| | 4700 | 22 x 40 | 3.52 | 4.29 | 0.38 | 65 | 51 | 17472E3 | 57472E3 |
| | 5600 | 25 x 35 | 3.53 | 4.31 | 0.45 | 63 | 51 | 27562E3 | 67562E3 |
| | 6800 | 30 x 30 | 3.39 | 4.14 | 0.55 | 69 | 56 | 37682E3 | 77682E3 |
| | 8200 | 25 x 50 | 4.72 | 5.76 | 0.66 | 44 | 36 | 27822E3 | 67822E3 |
| | 8200 | 30 x 35 | 3.90 | 4.76 | 0.66 | 57 | 47 | 37822E3 | 77822E3 |
| | 10 000 | 30 x 40 | 4.36 | 5.32 | 0.80 | 48 | 40 | 37103E3 | 77103E3 |
| | 12 000 | 35 x 35 | 4.00 | 4.88 | 0.96 | 56 | 45 | 47123E3 | 87123E3 |
| | 15 000 | 35 x 45 | 4.99 | 6.09 | 1.20 | 42 | 35 | 47153E3 | 87153E3 |
| | 18 000 | 35 x 50 | 5.36 | 6.54 | 1.44 | 38 | 31 | 47183E3 | 87183E3 |
| 50 | 1500 | 22 x 25 | 1.99 | 2.43 | 0.15 | 148 | 102 | 11152E3 | 51152E3 |
| | 2200 | 22 x 30 | 2.50 | 3.05 | 0.22 | 104 | 73 | 11222E3 | 51222E3 |
| | 2700 | 22 x 35 | 2.88 | 3.51 | 0.27 | 85 | 60 | 11272E3 | 51272E3 |
| | 2700 | 25 x 30 | 2.81 | 3.43 | 0.27 | 91 | 66 | 21272E3 | 61272E3 |
| | 3300 | 22 x 40 | 3.27 | 3.99 | 0.33 | 71 | 51 | 11332E3 | 51332E3 |
| | 3300 | 25 x 35 | 3.23 | 3.94 | 0.33 | 75 | 55 | 21332E3 | 61332E3 |
| | 3900 | 25 x 40 | 3.62 | 4.42 | 0.39 | 64 | 47 | 21392E3 | 61392E3 |
| | 4700 | 30 x 30 | 3.24 | 3.95 | 0.47 | 74 | 57 | 31472E3 | 71472E3 |
| | 5600 | 25 x 50 | 4.43 | 5.40 | 0.56 | 48 | 36 | 21562E3 | 61562E3 |
| | 5600 | 30 x 35 | 3.73 | 4.55 | 0.56 | 61 | 47 | 31562E3 | 71562E3 |
| | 6800 | 30 x 40 | 4.17 | 5.09 | 0.68 | 52 | 41 | 31682E3 | 71682E3 |
| | 8200 | 35 x 35 | 3.88 | 4.73 | 0.82 | 61 | 46 | 41822E3 | 81822E3 |
| | 10 000 | 35 x 40 | 4.33 | 5.28 | 1.00 | 52 | 40 | 41103E3 | 81103E3 |
| 12 000 | 35 x 45 | 4.72 | 5.76 | 1.20 | 46 | 35 | 41123E3 | 81123E3 | |
| 63 | 1200 | 22 x 25 | 2.07 | 2.53 | 0.16 | 137 | 100 | 18122E3 | 58122E3 |
| | 1500 | 22 x 30 | 2.49 | 3.04 | 0.19 | 107 | 78 | 18152E3 | 58152E3 |
| | 2200 | 22 x 35 | 3.00 | 3.66 | 0.26 | 79 | 58 | 18222E3 | 58222E3 |
| | 2200 | 25 x 30 | 2.90 | 3.54 | 0.28 | 85 | 64 | 28222E3 | 68222E3 |
| | 2700 | 25 x 35 | 3.34 | 4.07 | 0.34 | 70 | 53 | 28272E3 | 68272E3 |
| | 3300 | 25 x 40 | 3.76 | 4.59 | 0.42 | 59 | 45 | 28332E3 | 68332E3 |
| | 3300 | 30 x 30 | 3.28 | 4.00 | 0.42 | 74 | 58 | 38332E3 | 78332E3 |
| | 3900 | 30 x 35 | 3.77 | 4.60 | 0.50 | 61 | 48 | 38392E3 | 78392E3 |
| | 4700 | 30 x 40 | 4.22 | 5.15 | 0.60 | 52 | 41 | 38472E3 | 78472E3 |
| | 5600 | 35 x 35 | 3.97 | 4.84 | 0.71 | 59 | 47 | 48562E3 | 88562E3 |
| | 6800 | 30 x 50 | 5.04 | 6.15 | 0.86 | 40 | 33 | 38682E3 | 78682E3 |
| | 6800 | 35 x 40 | 4.42 | 5.39 | 0.86 | 51 | 40 | 48682E3 | 88682E3 |
| | 8200 | 35 x 45 | 4.82 | 5.88 | 1.04 | 45 | 35 | 48822E3 | 88822E3 |
| | 10 000 | 35 x 50 | 5.17 | 6.31 | 1.26 | 40 | 32 | 48102E3 | 88102E3 |




| ELECTRICAL DATA AND ORDERING INFORMATION | | | | | | | | | |
|--|----------------------------------|---|---|---|----------------------------------|---|--------------------------|----------------------------------|---------|
| U _R (V) | C _R 100 Hz (μF) | NOMINAL CASE SIZE Ø D x L (mm) | I _R 100 Hz 105 °C (A) | I _R 10 kHz 105 °C (A) | I _{L5} 5 min (mA) | MAX. ESR 100 Hz ⁽¹⁾ (mΩ) | MAX. Z 10 kHz (mΩ) | ORDERING CODE MAL2158..... | |
| | | | | | | | | 2-TERM. | 3-TERM. |
| 80 | 820 | 22 x 25 | 1.44 | 1.76 | 0.14 | 422 | 397 | 12821E3 | 52821E3 |
| | 1200 | 22 x 30 | 1.82 | 2.22 | 0.20 | 291 | 274 | 12122E3 | 52122E3 |
| | 1500 | 22 x 35 | 2.12 | 2.59 | 0.24 | 234 | 221 | 12152E3 | 52152E3 |
| | 1500 | 25 x 30 | 2.10 | 2.56 | 0.24 | 240 | 228 | 22152E3 | 62152E3 |
| | 1800 | 25 x 35 | 2.41 | 2.94 | 0.29 | 201 | 189 | 22182E3 | 62182E3 |
| | 2200 | 25 x 40 | 2.74 | 3.34 | 0.36 | 166 | 156 | 22222E3 | 62222E3 |
| | 2200 | 30 x 30 | 2.55 | 3.11 | 0.36 | 180 | 172 | 32222E3 | 72222E3 |
| | 2700 | 30 x 35 | 2.93 | 3.57 | 0.44 | 147 | 141 | 32272E3 | 72272E3 |
| | 3300 | 25 x 50 | 3.46 | 4.22 | 0.53 | 114 | 109 | 22332E3 | 62332E3 |
| | 3900 | 30 x 40 | 3.39 | 4.14 | 0.63 | 110 | 106 | 32392E3 | 72392E3 |
| | 4700 | 35 x 35 | 3.29 | 4.01 | 0.76 | 110 | 107 | 42472E3 | 82472E3 |
| | 5600 | 35 x 40 | 3.69 | 4.50 | 0.90 | 93 | 90 | 42562E3 | 82562E3 |
| | 6800 | 35 x 50 | 4.43 | 5.40 | 1.09 | 75 | 71 | 42682E3 | 82682E3 |
| 100 | 560 | 22 x 25 | 1.33 | 1.62 | 0.12 | 461 | 412 | 19561E3 | 59561E3 |
| | 820 | 22 x 30 | 1.69 | 2.06 | 0.17 | 318 | 284 | 19821E3 | 59821E3 |
| | 1000 | 22 x 35 | 1.95 | 2.38 | 0.20 | 261 | 234 | 19102E3 | 59102E3 |
| | 1000 | 25 x 30 | 1.95 | 2.38 | 0.20 | 267 | 240 | 29102E3 | 69102E3 |
| | 1200 | 25 x 35 | 2.23 | 2.72 | 0.24 | 223 | 200 | 29122E3 | 69122E3 |
| | 1500 | 25 x 40 | 2.56 | 3.12 | 0.30 | 180 | 162 | 29152E3 | 69152E3 |
| | 1800 | 30 x 30 | 2.49 | 3.04 | 0.36 | 172 | 158 | 39182E3 | 79182E3 |
| | 2200 | 30 x 35 | 2.87 | 3.50 | 0.44 | 141 | 129 | 39222E3 | 79222E3 |
| | 2700 | 30 x 40 | 3.24 | 3.95 | 0.54 | 117 | 108 | 39272E3 | 79272E3 |
| | 3300 | 30 x 50 | 3.87 | 4.72 | 0.66 | 94 | 87 | 39332E3 | 79332E3 |
| | 3300 | 35 x 35 | 3.19 | 3.89 | 0.66 | 115 | 107 | 49332E3 | 89332E3 |
| | 3900 | 35 x 40 | 3.58 | 4.37 | 0.78 | 98 | 91 | 49392E3 | 89392E3 |
| | 4700 | 35 x 50 | 4.29 | 5.23 | 0.94 | 78 | 73 | 49472E3 | 89472E3 |

| ADDITIONAL ELECTRICAL DATA | | |
|------------------------------------|-----------------------------------|--|
| PARAMETER | CONDITIONS | VALUE |
| Voltage | | |
| Surge voltage | | $U_s = 1.15 \times U_R$ |
| Reverse voltage | | $U_{rev} \leq 1 \text{ V}$ |
| Current | | |
| Leakage current | After 1 minute at U _R | $I_{L1} \leq 0.006 C_R \times U_R + 4 \mu\text{A}$ |
| | After 5 minutes at U _R | $I_{L5} \leq 0.002 C_R \times U_R + 4 \mu\text{A}$ |
| Inductance | | |
| Equivalent series inductance (ESL) | All case sizes | typ. 19 nH |
| | | max. 25 nH |



RIPPLE CURRENT AND USEFUL LIFE

MGA454

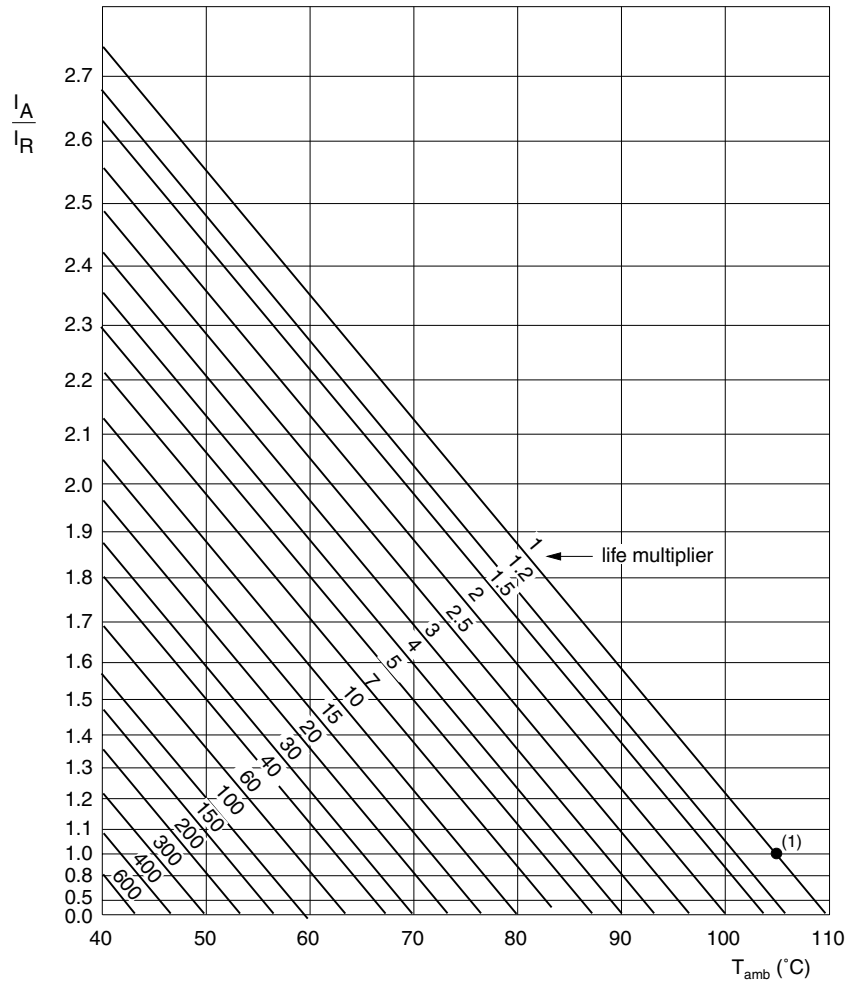

I_A = actual ripple current at 100 Hz
 I_R = rated ripple current at 100 Hz and 105 °C
 (1) Useful life at 105 °C and I_R applied: 5000 hours

Fig.6 Multiplier of useful life as a function of ambient temperature and ripple current load

Table 3

| MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY | | |
|---|-------------------------------------|--------------------------------------|
| FREQUENCY (Hz) | I_R MULTIPLIER | |
| | $U_R = 16 \text{ to } 25 \text{ V}$ | $U_R = 40 \text{ to } 100 \text{ V}$ |
| 50 | 0.93 | 0.91 |
| 100 | 1.00 | 1.00 |
| 200 | 1.04 | 1.05 |
| 400 | 1.07 | 1.09 |
| 1000 | 1.11 | 1.13 |
| 2000 | 1.13 | 1.15 |
| 4000 | 1.15 | 1.18 |
| $\geq 10\ 000$ | 1.18 | 1.22 |



Table 4

| TEST PROCEDURES AND REQUIREMENTS | | | |
|--|--|--|---|
| TEST | | PROCEDURE (quick reference) | REQUIREMENTS |
| NAME OF TEST | REFERENCE | | |
| Endurance | IEC 60384-4/ EN130300 subclause 4.13 | $T_{amb} = 105\text{ }^{\circ}\text{C}$; U_R applied; 2000 hours | $\Delta C/C: \pm 15\%$ $ESR \leq 1.3 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ |
| Useful life | CECC 30301 subclause 1.8.1 | $T_{amb} = 105\text{ }^{\circ}\text{C}$; U_R and I_R applied; 5000 hours | $\Delta C/C: \pm 20\%$ $ESR \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage total failure percentage: $U_R : \leq 1\%$ |
| Shelf life (storage at high temperature) | IEC 60384-4/ EN130300 subclause 4.17 | $T_{amb} = 105\text{ }^{\circ}\text{C}$; no voltage applied; 500 hours After test: U_R to be applied for 30 minutes, 24 hours to 48 hours before measurement | $\Delta C/C: \pm 15\%$ $ESR \leq 1.5 \times \text{spec. limit}$ $I_{L5} \leq 2 \times \text{spec. limit}$ |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.