Power PCB Relay RPII/2

- **2 pole 8 A, 2 form C (CO) or 2 form A (NO) contacts**
- **4 kv/8 mm coil contact**
- **Twin contacts available**

F0150-B

Applications
Domestic appliances, UPS

Approvals

VDE Cert. No. 40025448, UL E214024
Technical data of approved types on request

Contact Data

Contact configuration	2 form C (CO) or 2 form A (NO)
Rated voltage / max.switching voltage AC	250 VAC
Max. switching voltage	400 VAC
Rated voltage	8 A (UL: 10A)
Limiting making capacity, max 4 s, duty factor 10%	14 A
Breaking capacity max.	2000 VA
Contact material	AgCdO, AgNi0.15 gold flashed
Frequency of operation with / without load	600 / 72000 h^{-1}
Operate/release time typ.	9/3 ms
Bounce time typ., form A/form B	2/3 ms

Contact ratings

Type	Contact	Load	Cycles
IEC61810			
RP420/421	A (NO)	8A, 250 VAC, resistive, 35°C	$100x10^3$
RP420	A (NO)	5A, 250 VAC, resistive, 70°C	$30x10^3$
UL508			
RP420	C (CO)	10A, 250 VAC, gen. purp, 70°C	$6x10^3$

Max. DC load breaking capacity



Electrical endurance



Coil Data

Coil voltage range	5 to 110VDC
Operative range, IEC 61810	2

Coil versions, DC coil

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%[1]	Rated coil power mW
005	5	3.5	0.5	54	500
006	6	4.2	0.6	68	500
012	12	8.4	1.2	270	500
024	24	16.8	2.4	1100[1]	500
048	48	33.6	4.8	4400[1]	500
060	60	42.0	6.0	6540[1]	500
110	110	77.0	11.0	23100[1]	500

1) Coil resistance ±15%.
All figures are given for coil without pre-energization, at ambient temperature +20°C.
Other coil voltages on request.

Coil operating range DC

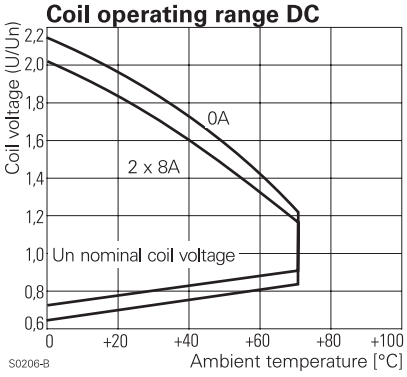

Insulation Data

Initial dielectric strength	
coil-contact circuit	$4000V_{rms}$
open contact circuit	$1000V_{rms}$
adjacent contact circuits	$2500V_{rms}$
Clearance/creepage	
coil-contact circuit	≥8/8mm
Material group of insulation parts	IIIa

04-2015, Rev. 0415
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

Power PCB Relay RPII/2 (Continued)

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter	
Ambient temperature	-40 to +70°C
Category of environmental IEC 61810	RTII - flux proof, RTIII - wash tight
Vibration resistance (functional), form A/form B, 30 to 150Hz	11/1.5g
Shock resistance (destructive)	100g
Terminal type	PCB-THT
Resistance to soldering heat THT, IEC 60068-2-20	
flux-proof version	270°C / 10s
wash-tight version	260°C / 5s
Relay weight	18g
Packaging unit	tube/20 pcs., box/500 pcs.

Dimensions

Dimensions in mm

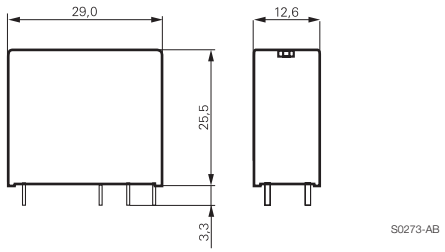

PCB layout / terminal assignment

Bottom view on solder pins
Dimensions in mm

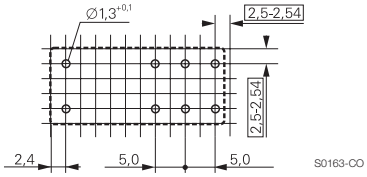

2 form C (CO) contacts



2 form A (NO) contacts



Product code structure

Typical product code: **RP 4 2 0 024**

Type
RP Power PCB Relay RPII/2

Version
4 8A, flux proof
8 8A, wash tight

Contact arrangement
2 2 form C (2 CO)
4 2 form A (2 NO)

Contact material
1 AgNi0.15 gold flashed
0 AgCdO

Coil
Coil code: please refer to coil versions table

Product code	Version	Contacts	Cont. material	Pinning	Part number
RP420006	Flux proof, 8A	2 form C (CO) contacts	AgCdO	6VDC	4-1393234-8
RP420012				12VDC	5-1393234-0
RP420024				24VDC	5-1393234-1
RP420048				48VDC	5-1393234-2
RP421012			AgNi0.15	12VDC	6-1393234-7
RP421024				24VDC	6-1393234-8
RP421110				110VDC	7-1393234-1
RP820012	Wash tight, 8A		AgCdO	12VDC	9-1393234-0
RP820024				24VDC	9-1393234-2
RP821012			AgNi0.15	12VDC	1393845-4
RP821024				24VDC	1393845-5

This list represents the most common types and does not show all variants covered by this datasheet.
Other types on request.

04-2015, Rev. 0415
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.