




720 TFX-i Series Sealed and Rugged Keypads

These tough, water resistant keypads feature moving, tactile keys with a responsive 'over-centre' action and are designed for use in harsh industrial environments. High contrast white keytops are permanently laser engraved with black characters and have integral white LED illumination for use in dark or partially lit locations.



The keypad can be installed on the surface or under the panel.
(Underpanel Installation Instructions are in the Underpanel Fitting Kit)
Fit the supplied silicone seal into the seal groove on the keypad
Use the groove on top for underpanel, and on back for surface fix.
The wide part of the seal goes into the groove – see picture below of the seal fitted to the back of the keypad.



Connection Details

Connection Details for 4 Key Keypad

CONTACT CONNECTIONS
● ● ● ● ● ●
7 6 5 4 3 2 1
(As viewed from rear of keypad)

1
A ☐
B ☐
C ☐
D ☐

KEY LOCATION
(As viewed from front of keypad)

CONTACT MATRIX	
CONN. PIN	ROW/ COLUMN
1	Cathode
2	Common
3	D
4	C
5	B
6	A
7	Anode

Connection Details for 12 Key Keypad

CONTACT CONNECTIONS
● ● ● ● ● ● ● ● ● ● ● ●
10 9 8 7 6 5 4 3 2 1
(As viewed from rear of keypad)

1 2 3
A ☐ ☐ ☐
B ☐ ☐ ☐
C ☐ ☐ ☐
D ☐ ☐ ☐

KEY LOCATION
(As viewed from front of keypad)

CONTACT MATRIX	
CONN. PIN	ROW/ COLUMN
1	Cathode
2	A
3	B
4	1
5	2
6	3
7	–
8	D
9	C
10	Anode

Connection Details for 16 Key Keypad

CONTACT CONNECTIONS
● ● ● ● ● ● ● ● ● ● ● ● ● ●
10 9 8 7 6 5 4 3 2 1
(As viewed from rear of keypad)

1 2 3 4
A ☐ ☐ ☐ ☐
B ☐ ☐ ☐ ☐
C ☐ ☐ ☐ ☐
D ☐ ☐ ☐ ☐

KEY LOCATION
(As viewed from front of keypad)

CONTACT MATRIX	
CONN. PIN	ROW/ COLUMN
1	Cathode
2	A
3	B
4	1
5	2
6	3
7	4
8	D
9	C
10	Anode

Electrical

Contact Bounce 5 ms (max)
Contact Resistance 100 ohms (max)
Insulation Resistance 50 Mohms (min)
Breakdown Voltage 500 V AC (max 60 secs.)
Switch Rating 24V DC 50mA (max)
Connection X-Y Matrix
Illumination (Pin 1 is 0 V) 5 V DC $\pm$ 10 %, 13mA per key

Mechanical

Operational Life 2 million cycles (min) per key
Keytop Travel 1.4mm nominal
Actuation Force 150 grams nominal
Connector 0.1"pitch, gold plated square pin

Mating Connector Molex 2695 Series or equivalent

Performance

Operational Temp -20°C to 60°C
Impact Rating 5 J
Vibration/Shock ETSI 300 019 5M3
Water / Dust sealed IP65 (when fixed to suitable panel)

Part Numbers

7203-04CW20
7203-12TW20
7203-16TW20
7200-FK020

720TFXi SERIES 4 KEY
720TFXi SERIES 12 KEY
720TFXi SERIES 16 KEY
UNDERPANEL FITTING KIT

Accessories

4200-00
4500-10
Replacement Seals -- go to www.storm-interface.com

RS232 Encoder Interface Module
450 USB Encoder Interface Module
with Buzzer and Illumination Control

Dimensions

Overall sizes
Panel Cutout DXF
Surface Model STEP


See following page.
Download .dxf and .stp files from
www.storm-interface.com




Install the keypad onto the surface of a panel as follows :-

- Fit the seal to the rear of the keypad
- Place the keypad onto the panel and fit the self locking nuts to the studs on the back
- Recommended tightening torque 50Ncm


Side View : 4, 12, 16

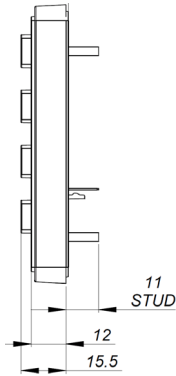


Front and Back View : 4 way

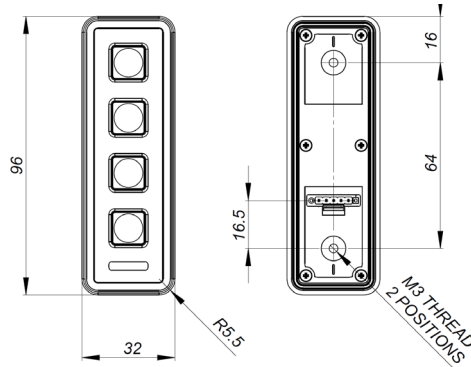


Panel Cutout : 4 way




Front and Back View, 12 way

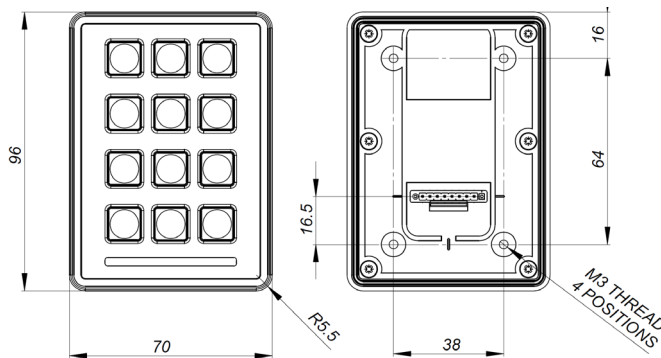


Panel Cutout : 12 way



Front and Back View, 16 way

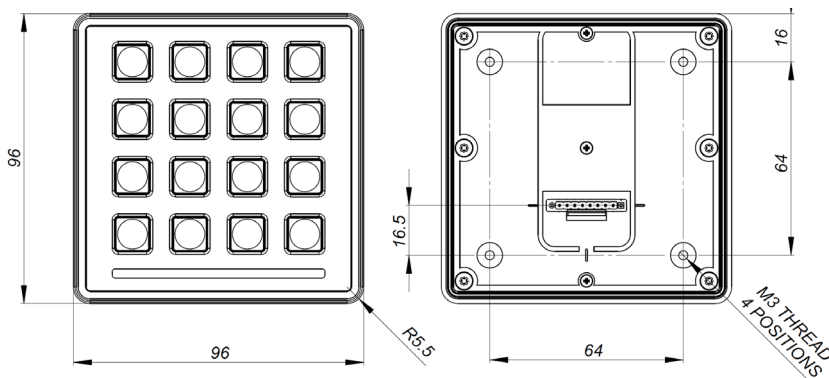

Panel Cutout : 16 way



All panel dims in mm.
Corner Rads all M3



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.