

DS26S10

Quad Bus Transceiver

General Description

The DS26S10 is a quad Bus Transceiver consisting of 4 high speed bus drivers with open-collector outputs capable of sinking 100 mA at 0.8V and 4 high speed bus receivers. Each driver output is connected internally to the high speed bus receiver in addition to being connected to the package pin. The receiver has a Schottky TTL output capable of driving 10 Schottky TTL unit loads.

An active low enable gate controls the 4 drivers so that outputs of different device drivers can be connected together for party-line operation.


The bus output high-drive capability in the low state allows party-line operation with a line impedance as low as 100Ω. The line can be terminated at both ends, and still give considerable noise margin at the receiver. The receiver typical switching point is 2V.

The DS26S10 features advanced Schottky processing to minimize propagation delay. The device package also has 2 ground pins to improve ground current handling and allow close decoupling between V_{CC} and ground at the package. Both GND 1 and GND 2 should be tied to the ground bus external to the device package.

Features

- Input to bus is inverting on DS26S10
- Quad high speed open-collector bus transceivers
- Driver outputs can sink 100 mA at 0.8V maximum
- Advanced Schottky processing
- PNP inputs to reduce input loading

Logic Diagrams

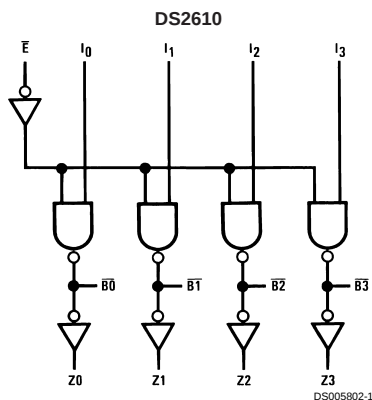

Absolute Maximum Ratings (Note *NO

TARGET FOR FNXref NS859*)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

Storage Temperature	-65°C to +150°C
Temperature (Ambient) Under Bias	-55°C to +125°C
Supply Voltage to Ground Potential	-0.5V to +7V
DC Voltage Applied to Outputs for High Output State	-0.5V to +V _{CC} Max
DC Input Voltage	-0.5V to +5.5V
Output Current, Into Bus	200 mA
Output Current, Into Outputs (Except Bus)	30 mA

DC Input Current -30 mA to +5 mA

Maximum Power Dissipation (Note 1) at 25°C

Molded Package 1362 mW

Operating Conditions

	Min	Max	Units
Supply Voltage (V _{CC})			
DS26S10	4.75	5.25	V
Temperature (T _A)			
DS26S10	0	+70	°C


Note 1: Derate cavity package 9.6 mW/°C above 25°C; derate molded package 10.9 mW/°C above 25°C, derate PLCC package TBD mW/°C above 25°C.

Electrical Characteristics

(Unless otherwise noted)

Symbol	Parameter	Conditions (Note 2)		Min	Typ (Note 3)	Max	Units
V _{OH}	Output High Voltage (Receiver Outputs)	V _{CC} = Min, I _{OH} = -1 mA, V _{IN} = V _{IL} or V _{IH}	Military	2.5	3.4		V
			Commercial	2.7	3.4		V
V _{OL}	Output Low Voltage (Receiver Outputs)	V _{CC} = Min, I _{OL} = 20 mA, V _{IN} = V _{IL} or V _{IH}				0.5	V
V _{IH}	Input High Level (Except Bus)	Guaranteed Input Logical High for All Inputs		2.0			V
V _{IL}	Input Low Level (Except Bus)	Guaranteed Input Logical Low for All Inputs				0.8	V
V _I	Input Clamp Voltage (Except Bus)	V _{CC} = Min, I _{IN} = -18 mA				-1.2	V
I _{IL}	Input Low Current (Except Bus)	V _{CC} = Max, V _{IN} = 0.4V	Enable			-0.36	mA
			Data			-0.54	mA
I _{IH}	Input High Current (Except Bus)	V _{CC} = Max, V _{IN} = 2.7V	Enable			20	μA
			Data			30	μA
I _I	Input High Current (Except Bus)	V _{CC} = Max, V _{IN} = 5.5V				100	μA
I _{SC}	Output Short-Circuit Current (Except Bus)	V _{CC} = Max, (Note 4)	Military	-20		-55	mA
			Commercial	-18		-60	mA
I _{CCL}	Power Supply Current (All Bus Outputs Low)	V _{CC} = Max, Enable = GND	DS26S10		45	70	mA
			DS26S11			80	mA

Connection Diagram



Top View
Order Number DS26S10N
See NS Package Number N16A
Plastic Chip Carrier

Bus Input/Output Characteristics

Symbol	Parameter	Conditions (Note 2)	Min	Typ(Note 3)	Max	Units
V_{OL}	Output Low Voltage	$V_{CC} = \text{Min}$		0.33	0.5	V
				0.42	0.05	
				0.51	0.8	
I_O	Bus Leakage Current	$V_{CC} = \text{Max}$			-50	μA
					100	
I_{OFF}	Bus Leakage Current (power OFF)	$V_O = 4.5\text{V}$			100	μA
V_{TH}	Receiver Input High Threshold	Bus enable = 2.4V $V_{CC} = \text{Max}$	2.25	2.0		V
V_{TL}	Receiver Input Low Threshold	Bus enable = 2.4V $V_{CC} = \text{Min}$		2.0	1.75	

Note 2: For conditions shown as min or max, use the appropriate value specified under Electrical Characteristics for the applicable device type.

Note 3: Typical limits are at $V_{CC} = 5\text{V}$, 25°C ambient and maximum loading.

Note 4: Not more than one output should be shorted at a time. Duration of the short circuit test should not exceed one second.

Switching Characteristics

($T_A = 25^\circ\text{C}$, $V_{CC} = 5\text{V}$)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
t_{PLH}	Data Input to Bus	$R_B = 50\Omega$, $C_B = 50\text{ pF}$ (Note 5)		10	15	ns
t_{PHL}	Data Input to Bus			10	15	ns
t_{PLH}	Enable Input to Bus	$R_B = 50\Omega$, $C_B = 50\text{ pF}$ (Note 5)		14	18	ns
t_{PHL}	Enable Input to Bus			13	18	ns
t_{PLH}	Bus to Receiver Out	$R_B = 50\Omega$, $R_L = 280\Omega$, $C_B = 50\text{ pF}$ (Note 5)		10	15	ns
t_{PHL}	Bus to Receiver Out			10	15	ns
t_r	Bus	$R_B = 50\Omega$, $C_B = 50\text{ pF}$ (Note 5)	4.0	10		ns
t_f	Bus		2.0	4.0		ns

Note 5: Includes probe and jig capacitance.

Truth Tables

DS26S10

Inputs		Outputs	
$\bar{E}$	I	$\bar{B}$	Z
L	L	H	L
L	H	L	H
H	X	Y	$\bar{Y}$


H = High voltage level

L = Low voltage level

X = Don't care


Y = Voltage level of bus (assumes control by another bus transceiver)

Typical Application

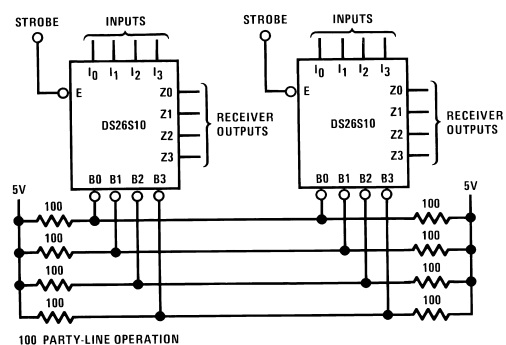


DS005802-5

AC Test Circuit and Switching Time Waveforms

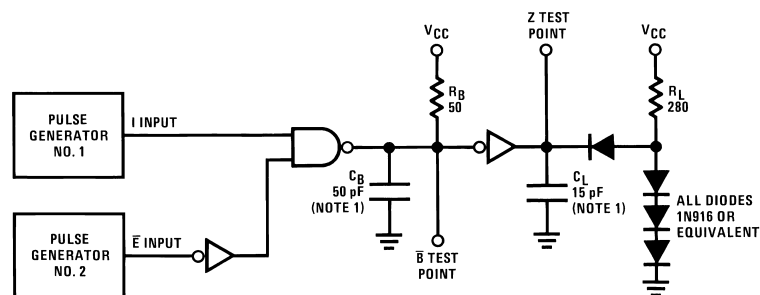

DS005802-6


Note 1: Includes probe and jig capacitance.

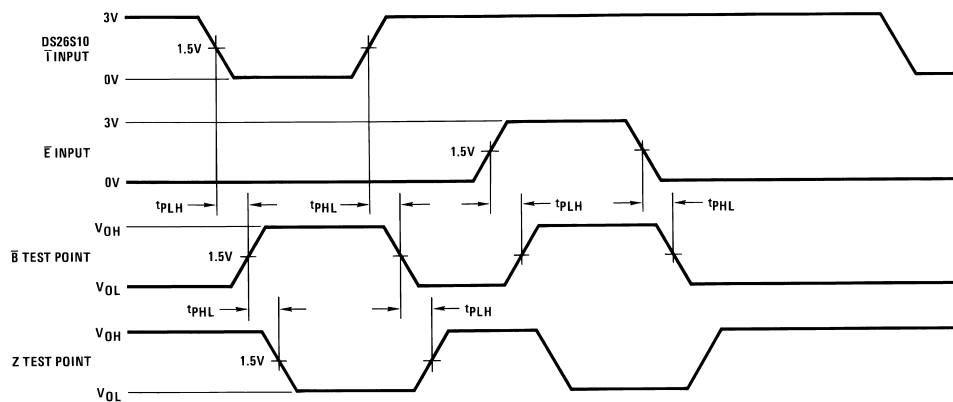

DS005802-7


Typical Performance Characteristics

Typical Bus Output Low Voltage vs Ambient Temperature




DS005802-8

Receiver Threshold Variation vs Ambient Temperature



DS005802-9


Schematic Diagram

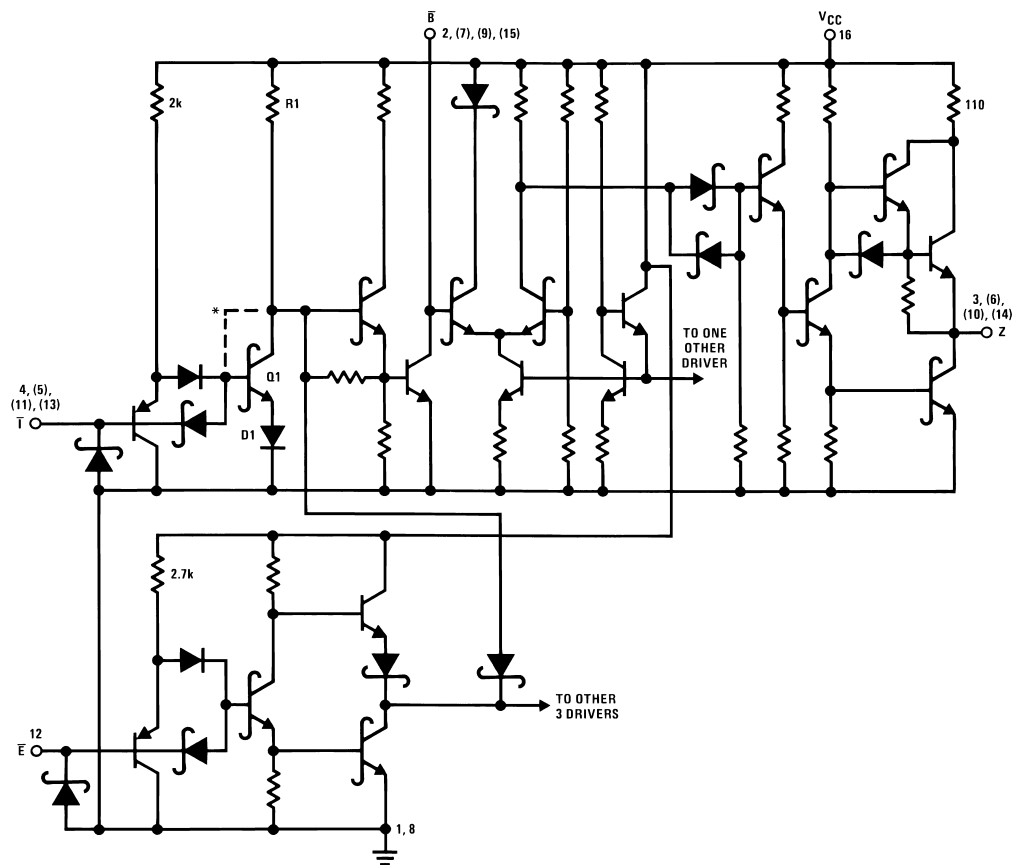

DS005802-10

V_{CC} = Pin 16
GND 1 = Pin 1
GND 2 = Pin 8
Connect for DS26S10
*Remove R1, Q1, D1 for DS26S10

Physical Dimensions inches (millimeters) unless otherwise noted

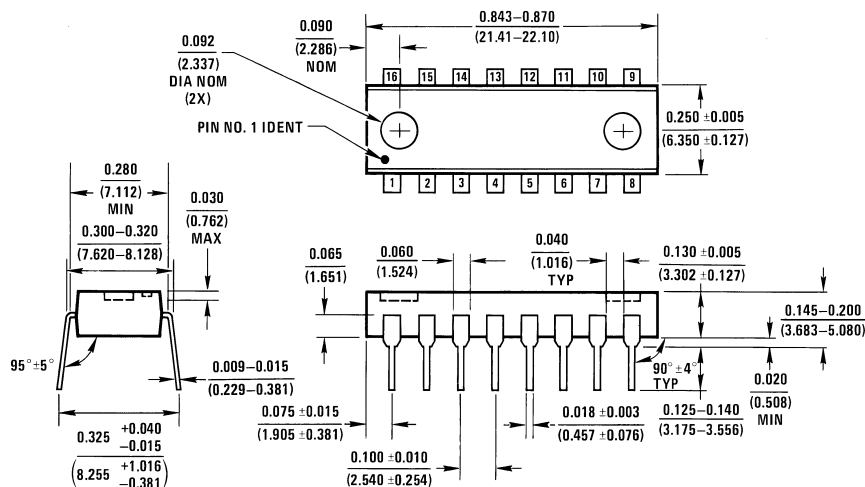

N16A (REV E)

Molded Dual-In-Line Package (N)
Order Number DS26S10N
NS Package Number N16A

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com

www.national.com

National Semiconductor Europe
Fax: +49 (0) 1 80-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 1 80-530 85 85
English Tel: +49 (0) 1 80-532 78 32
Français Tel: +49 (0) 1 80-532 93 58
Italiano Tel: +49 (0) 1 80-534 16 80

National Semiconductor Asia Pacific Customer Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: sea.support@nsc.com

National Semiconductor Japan Ltd.
Tel: 81-3-5639-7560
Fax: 81-3-5639-7507



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.