


# UT 4-HESILED 24 (5X20) BU

Order No.: 3046537

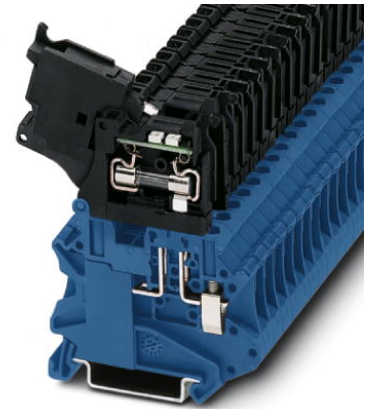

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3046537>

Fuse terminal block with LED for assembly on NS 35, for 5 x 20 cartridge fuse inserts

| Commercial data |               |
|-----------------|---------------|
| GTIN (EAN)      | 4046356134477 |
| Note            | Made-to-order |
| sales group     | A850          |
| Pack            | 50 pcs.       |
| Customs tariff  | 85369010      |
| Weight/Piece    | 0.017628 KG   |

<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Certificates / Approvals



Certification

CB, CSA, CUL, DNV, KEMA, UL

### CSA

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 24 V  |
| Nominal current $I_N$ | 6.3 A |
| AWG/kcmil             | 26-10 |

**CUL**

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 600 V |
| Nominal current $I_N$ | 6.3 A |
| AWG/kcmil             | 26-10 |

**UL**

|                       |       |
|-----------------------|-------|
| Nominal voltage $U_N$ | 600 V |
| Nominal current $I_N$ | 6.3 A |
| AWG/kcmil             | 26-10 |

**Accessories**

| Item | Designation | Description |
|------|-------------|-------------|
|------|-------------|-------------|

**Assembly**

|         |                             |  |
|---------|-----------------------------|--|
| 3022276 | CLIPFIX 35-5                | Snap-on end bracket, for NS 35/7.5 or NS 35/15 DIN rail, can be fitted with Zack strip ZB 5 and ZBF 5, terminal strip marker KLM 2 and KLM, parking facility for FBS...5, FBS...6, KSS 5, KSS 6, width: 5,15 mm, color: gray |
| 0801762 | NS 35/ 7,5 CU UNPERF 2000MM | DIN rail, material: Copper, unperforated, height 7.5 mm, width 35 mm, length: 2 m  |
| 1207640 | NS 35/ 7,5 PERF 755MM       | NS 35 DIN rail, height 7.5 mm, length 755 mm   |
| 1207653 | NS 35/ 7,5 PERF 955MM       | NS35 DIN rail, height 7.5 mm, length 955 mm  |
| 1207666 | NS 35/ 7,5 PERF 1155MM      | NS 35 DIN rail, height 7.5 mm, length 1155 mm  |
| 0801733 | NS 35/ 7,5 PERF 2000MM      | DIN rail, material: Steel, galvanized and passivated with a thick layer, perforated, height 7.5 mm, width 35 mm, length: 2 m   |
| 0801681 | NS 35/ 7,5 UNPERF 2000MM    | DIN rail, material: Steel, unperforated, height 7.5 mm, width 35 mm, length: 2 m   |
| 1201756 | NS 35/15 AL UNPERF 2000MM   | DIN rail, deep-drawn, high profile, unperforated, 1.5 mm thick, material: Aluminum, height 15 mm, width 35 mm, length 2 m  |
| 1201895 | NS 35/15 CU UNPERF 2000MM   | DIN rail, material: Copper, unperforated, 1.5 mm thick, height 15 mm, width 35 mm, length: 2 m   |
| 1207679 | NS 35/15 PERF 755MM         | NS 35 DIN rail, perforated, height 15 mm, length 755 mm  |
| 1207682 | NS 35/15 PERF 955MM         | NS 35 DIN rail, perforated, height 15 mm, length 955 mm  |
| 1207695 | NS 35/15 PERF 1155MM        | NS 35 DIN rail, perforated, height 15 mm, length 1155 mm   |
| 1201730 | NS 35/15 PERF 2000MM        | DIN rail, material: Steel, perforated, height 15 mm, width 35 mm, length: 2 m  |
| 1201714 | NS 35/15 UNPERF 2000MM      | DIN rail, material: Steel, unperforated, height 15 mm, width 35 mm, length: 2 m  |
| 1201798 | NS 35/15-2,3 UNPERF 2000MM  | DIN rail, material: Steel, unperforated, 2.3 mm thick, height 15 mm, width 35 mm, length: 2 m  |
| 3004207 | VS                          | Connection pin, Length: 1000 mm, Color: white  |

### Bridges

|         |          |   |
|---------|----------|---|
| 3030336 | FBS 2-6  | Plug-in bridge, Number of positions: 2, Color: red  |
| 3030242 | FBS 3-6  | Plug-in bridge, Number of positions: 3, Color: red  |
| 3030255 | FBS 4-6  | Plug-in bridge, Number of positions: 4, Color: red  |
| 3030349 | FBS 5-6  | Plug-in bridge, Number of positions: 5, Color: red  |
| 3030271 | FBS 10-6 | Plug-in bridge, Number of positions: 10, Color: red |
| 3030365 | FBS 20-6 | Plug-in bridge, Number of positions: 20, Color: red |
| 3032224 | FBS 50-6 | Plug-in bridge, Number of positions: 50, Color: red |

### Marking

|         |                        |  |
|---------|------------------------|--|
| 0811228 | X-PEN 0,35             | Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm  |
| 1050004 | ZB 5 :UNBEDRUCKT       | Zack strip, unprinted, 10-section, for individual labeling with M-PEN, ZB-T or CMS system, pack is sufficient for 100 terminal blocks, for a terminal width of 5.2 mm, color: White                |
| 1050017 | ZB 5,LGS:FORTL.ZAHLEN  | Zack marker strip, 10-section, printed horizontally: with the numbers 1 - 10, 11 - 20 and so on up to 491 - 500, color: white  |
| 1050020 | ZB 5,QR:FORTL.ZAHLEN   | Zack marker strip, 10-section, printed vertically: with consecutive numbers 1 - 10, 11 - 20, and so on up to 491 - 500, color: white   |
| 5060906 | ZB 5/WH-100:UNBEDRUCKT | Zack strip, unprinted: 10-section, for individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, for a terminal width of 5.2 mm, color: White |
| 1050295 | ZB 5:SO/CMS            | Zack strip, 10-section, divisible, special printing, marking according to customer requirements  |
| 1051016 | ZB 6,LGS:FORTL.ZAHLEN  | Zack marker strip, 10-section, printed horizontally: with the numbers 1 - 10, 11 - 20 and so on up to 491 - 500, color: white  |
| 5060935 | ZB 6/WH-100:UNBEDRUCKT | Zack strip, unprinted: For individual labeling with M-PEN, ZB-T or CMS system, large batch, sufficient for labeling 1000 terminal blocks, for a terminal width of 6.2 mm, color: White             |
| 1050499 | ZB 6:SO/CMS            | Zack strip, 10-section, divisible, special printing, marking according to customer requirements  |


### Tools

|         |             |  |
|---------|-------------|--|
| 1205053 | SZS 0,6X3,5 | Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip |
|---------|-------------|--|


**Diagrams/Drawings**

Application drawing

---

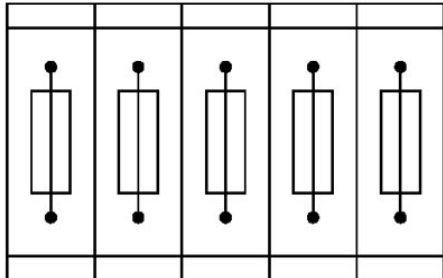

Fuse terminal blocks in interconnected arrangement, block consisting of 5 fuse terminal blocks

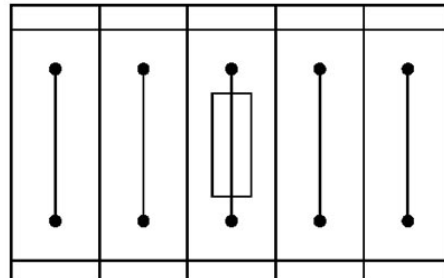

Fuse terminal block in single arrangement, block consisting of one fuse terminal block and 4 feed-through terminal blocks

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.