

Helping Customers Innovate, Improve & Grow



Description

The OX-202 is part of a series of oscillators specifically designed to support Timing Over Packet applications, in particular 1588-2008 based frequency and phase reference systems. The OX-202 is stratum 3E compliant.

Features

- Available in three standard frequencies (10MHz, 12.8MHz and 20MHz)
- Excellent temperature stability
- Superior long term stability
- Optimized to support Timing Over Packet applications
- Stratum 3E compliant according to GR1244

Applications

- SETS clock support
- Wireless Base Stations
- Edge and Core Routers

Performance Specifications


| Frequency Stability ¹ | | | | | |
|---|-----|-----|-------|------------|---|
| Parameter | Min | Typ | Max | Units | Notes |
| Over all stability (df/f ₀) | | | ±2.6 | ppm | Free run accuracy (20 years) |
| Drift | | | ±1 | ppb | Over 24 hours and ±3.0°C |
| Temperature stability (df/f) | | | 10 | ppb pk -pk | -40 to 85°C |
| Initial Tolerance (df/f ₀) | | | ±0.5 | ppm | @25°C |
| vs. supply voltage change (df/f) | | | ±2 | ppb | static; 3.3V ± 1% |
| vs. load change (df/f) | | | ±5 | ppb | static; Load ± 5% |
| vs. aging / daily (df/f) | | | ±0.75 | ppb | after 7 days; @25°C |
| vs. aging / month (df/f) | | | ±25 | ppb | after 7days; @25°C |
| vs. aging / year (df/f) | | | ±100 | ppb | after 7 days; @25°C |
| vs. aging / 20 years (df/f) | | | ±2.0 | ppm | after 7 days; @25°C |
| Phase Stability | | | | | |
| Parameter | Min | Typ | Max | Units | Notes |
| Jitter | | | 1 | ps rms | @12kHz to 20MHz |
| MTIE 1s | | 0.2 | | ns | Wander Generation per GR1244, system performance when locked through a 1mHz loop bandwidth, see typical performance data. |
| MTIE 10s | | 1.6 | | ns | |
| MTIE 100s | | 12 | | ns | |
| MTIE 1000s | | 34 | | ns | |

Performance Specifications


| Phase Stability (continued) | | | | | |
|----------------------------------|--|----------|------|---------|---|
| Parameter | Min | Typ | Max | Units | Notes |
| TDEV 1s | | 0.01 | | ns | Wander Generation per GR1244, system performance when locked through a 1mHz loop bandwidth, see typical performance data. |
| TDEV 10s | | 0.05 | | ns | |
| TDEV 100s | | 0.8 | | ns | |
| TDEV 1000s | | 3.5 | | ns | |
| Phase Noise | | | | | |
| Parameter | Min | Typ | Max | Units | Notes |
| Phase Noise at 1 Hz Offset | | | -85 | dBc/Hz | |
| Phase Noise at 10 Hz Offset | | | -115 | dBc/Hz | |
| Phase Noise at 100 Hz Offset | | | -135 | dBc/Hz | |
| Phase Noise 1 kHz Offset | | | -145 | dBc/Hz | |
| Phase Noise at 10 kHz Offset | | | -150 | dBc/Hz | |
| Phase Noise at 100kHz Offset | | | -150 | dBc/Hz | |
| RF Output | | | | | |
| Signal | | HCMOS | | | |
| Load | | 15 | | pF | ±10% |
| Rise Time | | <10 | | ns | @ 10% to 90% V _{out} |
| Fall Time | | <10 | | ns | @90% to 10% V _{out} |
| Duty Cycle | | 45/55 | | % | @ 50% V _{out} |
| V Low | | 0.4 | | V | With V _s 3.0V and 15pF load |
| V High | | 2.4 | | V | With V _s 3.0V and 15pF load |
| V Low | | 0.5 | | V | With V _s 5.0V and 15pF load |
| V High | | 3.5 | | V | With V _s 5.0V and 15pF load |
| Supply | | | | | |
| Supply Voltage (V _s) | | 3.3, 5.0 | | V | ±10% |
| Power consumption | | <1.5 | | W | Steady state, @ V _s = 3.3V, 25°C |
| Power consumption | | <3.3 | | W | During warm up, @ V _s = 3.3V, 25°C |
| Additional Parameters | | | | | |
| Warm Up Time | | 3 | | minutes | @25°C to final frequency (1 Hour) within ±0.1ppm |
| ROHS | ROHS 6 compliant | | | | |
| Washable | Washable device (hermetically sealed). | | | | |
| Absolute Maximum Ratings | | | | | |
| | | Min | Max | Units | |
| Operating temperature range | | -40 | 85 | °C | |
| Storage temperature range | | -50 | 90 | °C | |

Typical Performance

FREQUENCY STABILITY

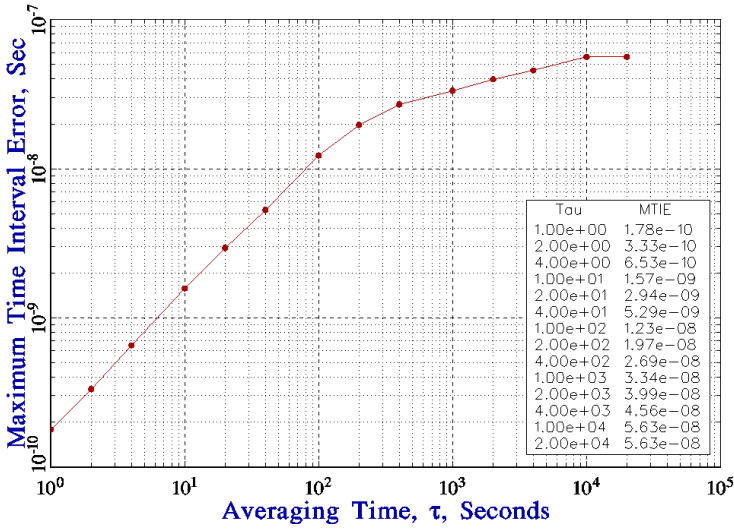


TIME STABILITY

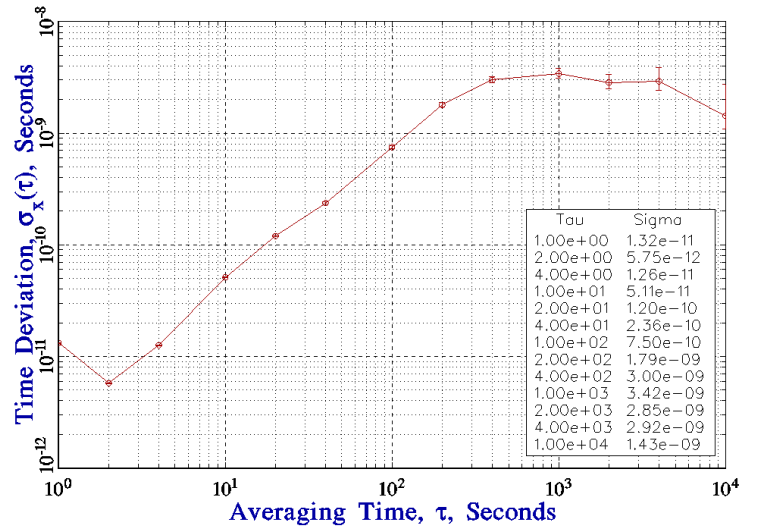

Wander Generation per GR1244, system performance when locked through a 1MHz loop bandwidth.

Outline Drawing / Enclosure

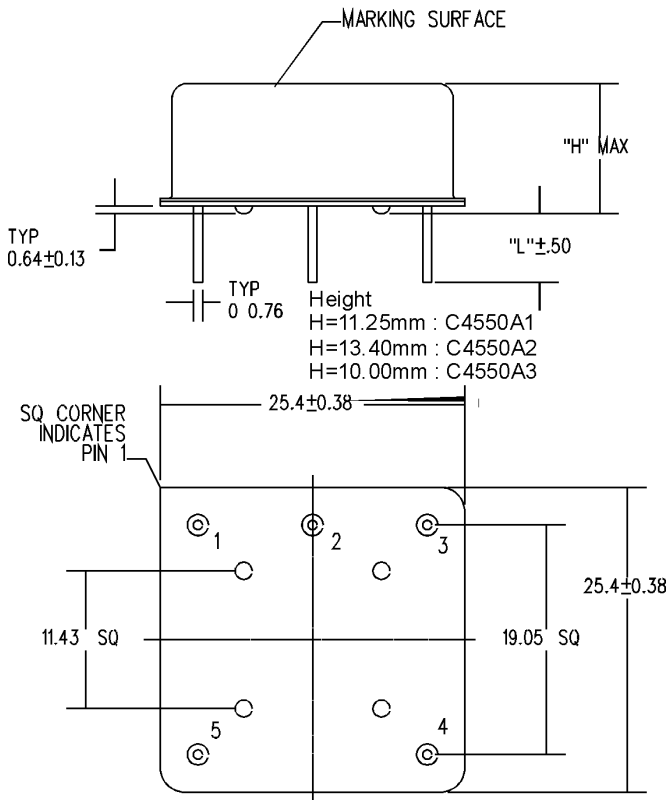


Dimensions in mm

| Height Codes | | |
|--------------|------------|----------------|
| Code | Height "H" | Pin Length "L" |
| 2 | 13.4 | 6.35 |

| Pin Assignment | |
|----------------|--------------------------------|
| Pin | Connection |
| 1 | RF Out |
| 2 | Ground (case) |
| 3 | NC |
| 4 | NC |
| 5 | Supply Voltage Input (V_s) |

Ordering Information

OX - 202 2 - E A E - 108 0 - 10M0000000

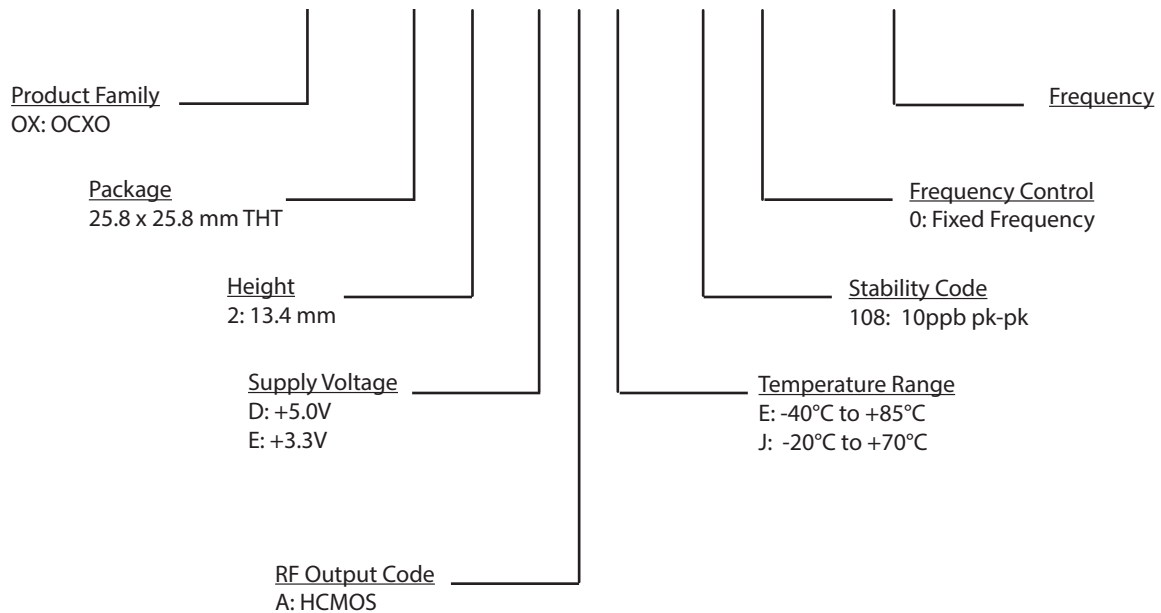

Notes:

1. Contact factory for improved stabilities or additional product options. Not all options and codes are available at all frequencies.
2. Unless other stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
3. Phase noise degrades with increasing output frequency.
4. Subject to technical modification.
5. Contact factory for availability.

For Additional Information, Please Contact

USA:

Vectron International
267 Lowell Road, Suite 102
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:

Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 3328.4784.17
Fax: +49 (0) 3328.4784.30

Asia:

Vectron International
68 Yin Cheng Road(C), 22nd Floor
One LuJiaZui
Pudong, Shanghai 200120, China
Tel: +86 21 6194 6886
Fax: +86 21 6194 6699

Disclaimer

Vectron International reserves the right to make changes to the product(s) and or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Rev: 2-18-2014 jar



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.