



RGPS-R9244GP+ Series

# RGPS-R9244GP+ Series

➔ **Industrial Layer-3 28-port managed Gigabit PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x1G/10GBase-X, SFP+ socket**

## Features

- Support Layer 3 static routing, RIP and VRRP function
- Support **O-Ring** (recovery time < 30ms) and MSTP (RSTP/STP compatible) for Ethernet Redundancy
- **O-Chain** allow multiple redundant network rings
- Support standard IEC 62439-2 **MRP\*NOTE** (Media Redundancy Protocol) function
- 24 port P.S.E. fully compliant with IEEE802.3at standard, provide up to 30 Watts per port
- Support PoE on/off scheduled configuration
- Support PoE alive check and auto reboot function
- Support IPv6 new internet protocol version
- Support Modbus TCP protocol
- Support IEEE 802.3az **Energy-Efficient Ethernet** technology
- Provided HTTPS/SSH protocol to enhance network security
- Support SMTP client and SMTP server protocol
- Support application-based QoS management
- Support Device Binding security function
- Support DOS/DDOS auto prevention
- IGMP v2/v3 (IGMP snooping support) for filtering multicast traffic
- Support SNMP v1/v2c/v3 & RMON & 802.1Q VLAN Network Management
- Support ACL and 802.1x User Authentication for security
- Support 10K Bytes Jumbo Frame
- SFP socket support DDM function
- Multiple notification for warning of unexpected event
- Support **DBU-01** backup unit device to quickly backup/restore configuration
- Web-based, Telnet, Console (CLI), and Windows utility (**Open-Vision**) configuration
- Support LLDP Protocol
- 19 inches rack mountable design




## Introduction

RGPS-R9244GP+ series is Layer 3 Gigabit managed redundant ring PoE Ethernet switch with 24x10/100/1000Base-T(X) IEEE802.3at P.S.E. ports and 4x1G/10GBase-X SFP+ ports. The switch support Ethernet Redundancy protocol, **O-Ring** (recovery time < 30ms) and MSTP (RSTP/STP compatible) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. RGPS-R9244GP+ series also support Power over Ethernet, a system to transmit electrical power up to **30 watts**, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. Each RGPS-R9244GP+ series switch has 24x10/100/1000Base-T(X) P.S.E. (Power Sourcing Equipment) ports. P.S.E. is a device (switch or hub for instance) that will provide power in a PoE connection. And RGPS-R9244GP+ series support wide operating temperature from -20°C to 60°C. Besides the Web-based interface, Telnet and console (CLI) configuration, RGPS-R9244GP+ series can also be managed centralized and convenient by Open-Vision. Therefore, the switch is one of the most reliable choice for highly-managed and Fiber PoE Ethernet application.

\*NOTE: This function is available by request only


- **O-Ring** : O-Ring is ORing's proprietary redundant ring technology, with recovery time of less 30 milliseconds and up to 250 nodes. The O-Ring redundant ring technology can protect mission-critical application from network interruptions or temporary malfunction with its fast recover technology.
- **O-Chain** : O-Chain is the revolutionary network redundancy technology that provides the add-on network redundancy topology for any backbone network, O-Chain allows multiple redundant network rings of different redundancy protocols to join and function together as a larger and more robust compound network topology. O-Chain providing ease-of-use while maximizing fault-recovery swiftness, flexibility, compatibility, and cost-effectiveness in one set of network redundancy topology.
- **MRP\*NOTE** : Media Redundancy Protocol (MRP) is a data network protocol standardized by the IEC 62439-2. It allows rings of Ethernet switches to overcome any single failure with recovery time much faster than achievable with Spanning Tree Protocol.
- **Application-Based QoS** : The switch also support application-based QoS. Application-based QoS can set highest priority for data stream according to TCP/UDP port number.
- **Device Binding Function** : ORing special Device Binding function can only permit allowed IP address with MAC address to access the network. Hacker cannot access the IP surveillance network without permission. It can avoid hacker from stealing video privacy data and attacking IP camera, NVR and controllers.
- **Advanced DOS/DDOS Auto Prevention** : The switch also provided advanced DOS/DDOS auto prevention. If there is any IP flow become big in short time, the switch will lock the source IP address for certain time to prevent the attack. It's hardware based prevention so it can prevent DOS/DDOS attack immediately and completely.
- **Modbus TCP** : This is a Modbus variant used for communications over TCP/IP networks.
- **IEEE 802.3az Energy-Efficient Ethernet** : This is a set of enhancements to the twisted-pair and backplane Ethernet family of networking standards that will allow for less power consumption during periods of low data activity. The intention was to reduce power consumption by 50% or more.

\*NOTE: This function is available by request only

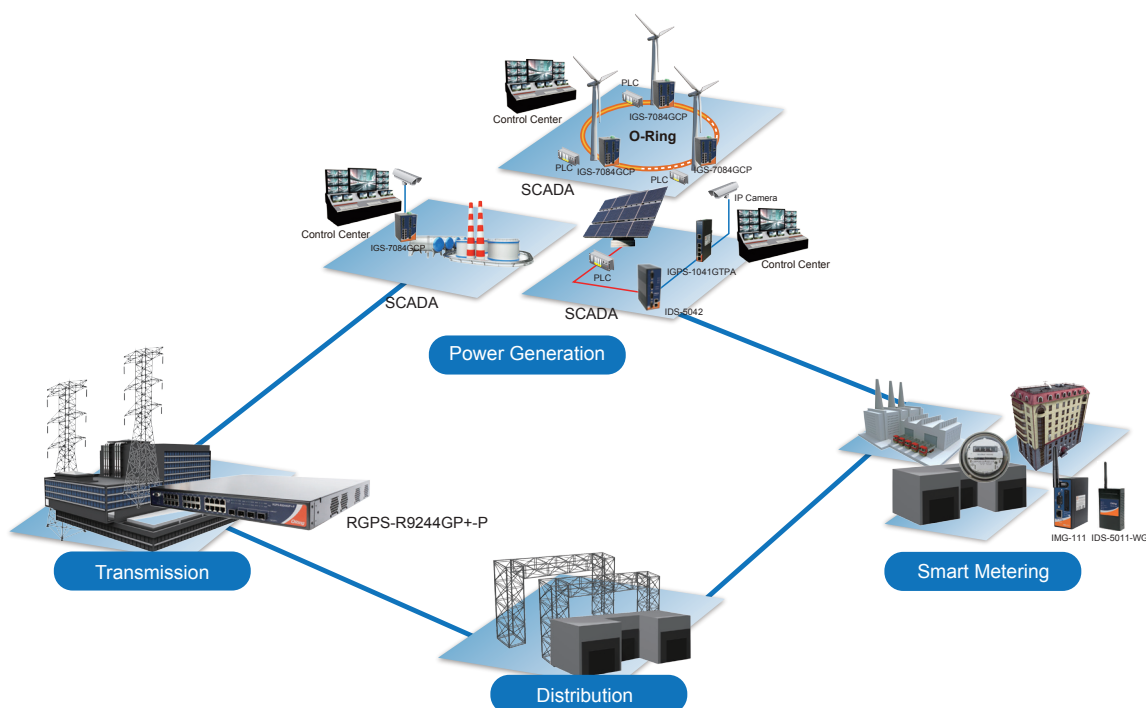


## Open-Vision


ORing's switches are intelligent switches. Different from other traditional redundant switches, ORing provides a set of Windows utility (Open-Vision) for user to manage and monitor all of industrial Ethernet switches on the industrial network.

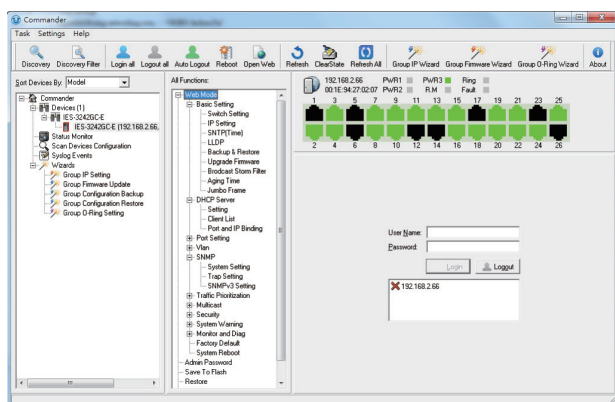

Commander

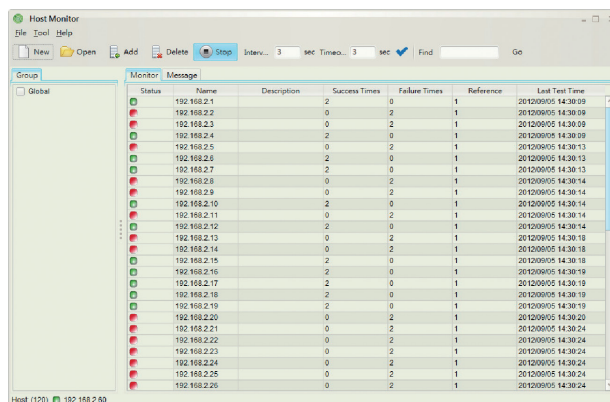

Host Monitor

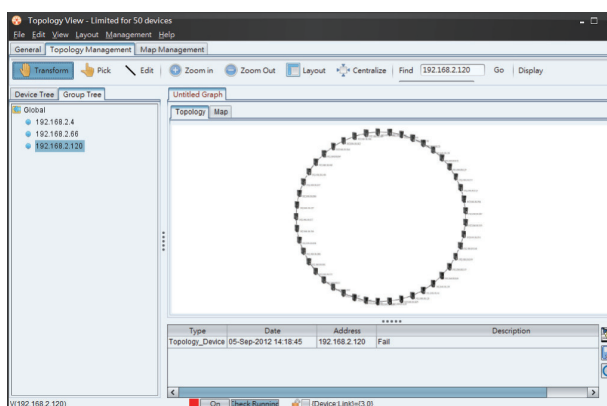

Topology View

## PoE Pin Definition

| 10/100Base-T(X) P.S.E. RJ-45 Port |                            |
|-----------------------------------|----------------------------|
| RJ-45 Pin Definition              |                            |
| Pin No.                           | Description                |
| #1                                | TD+ with PoE Power input + |
| #2                                | TD- with PoE Power input + |
| #3                                | RD+ with PoE Power input - |
| #6                                | RD- with PoE Power input - |

| 1000Base-T P.S.E. RJ-45 Port |                               |
|------------------------------|-------------------------------|
| RJ-45 Pin Definition         |                               |
| Pin No.                      | Description                   |
| #1                           | BI_DA+ with PoE Power input + |
| #2                           | BI_DA- with PoE Power input + |
| #3                           | BI_DB+ with PoE Power input - |
| #4                           | BI_DC+                        |
| #5                           | BI_DC-                        |
| #6                           | BI_DB- with PoE Power input - |
| #7                           | BI_DD+                        |
| #8                           | BI_DD-                        |

[illegible]

## Specifications

**ORing** Get Connected Anytime, Anywhere

|                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                               |                               |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|-------------------------------|
| Processing                               | Store-and-Forward                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                               |                               |
| Switch Properties                        | Switching latency: 7 us<br>Switching bandwidth: 128Gbps<br>Max. Number of Available VLANs: 4095<br>VLAN ID Range : VID 1 to 4094<br>IGMP multicast groups: 128 for each VLAN<br>Port rate limiting: User Define                                                                                                                                                                                                                                                                                                                                                  |                                               |                               |
| Security Features                        | Device Binding security feature<br>Enable/disable ports, MAC based port security<br>Port based network access control (802.1x)<br>MAC-based authentication (802.1x)<br>VLAN (802.1Q ) to segregate and secure network traffic<br>SNMPv3 encrypted authentication and access security<br>Https / SSH enhance network security<br>Web and CLI authentication and authorization<br>IP source guard                                                                                                                                                                  |                                               |                               |
| Software Features                        | IEEE 802.1D Bridge, auto MAC address learning/aging and MAC address (static)<br>Multiple Registration Protocol (MRP)<br>MSTP (RSTP/STP compatible)<br>Redundant Ring (O-Ring) with recovery time less than 30ms<br>TOS/Diffserv supported<br>Quality of Service (802.1p) for real-time traffic<br>VLAN (802.1Q) with VLAN tagging<br>IGMP v2/v3 Snooping<br>Application-based QoS management<br>DOS/DDOS auto prevention<br>Port configuration, status, statistics, monitoring, security<br>DHCP Server/Client/ Relay<br>Modbus TCP<br>NTP server<br>SMTP Client |                                               |                               |
| Network Redundancy                       | O-Ring<br>O-Chain<br>MRP* <b>NOTE</b><br>Fast Recovery<br>MSTP (RSTP/STP compatible)                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                               |                               |
| RS-232 Serial Console Port               | RS-232 in DB-9 connector with console cable. 115200bps, 8, N, 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                               |                               |
| LED indicators                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                               |                               |
| Power Indicator (PWR)                    | Green: Power indicator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                               |                               |
| Ring Master Indicator (R.M.)             | Green: Indicates that the system is operating in O-Ring Master mode                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                               |                               |
| O-Ring Indicator (Ring)                  | Green: Indicates that the system operating in O-Ring mode<br>Green Blinking: Indicates that the Ring is broken.                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                               |                               |
| Fault Indicator (Fault)                  | Amber: Indicate unexpected event occurred                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                               |                               |
| 10/100/1000Base-T(X) RJ45 Port Indicator | Dual color LED for Link/Act/Speed indicator ~ Green (1G Link/Act) / Amber (10/100M Link/Act)                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                               |                               |
| 1G/10GBase-X SFP+ Port Indicator         | Green for port Link/Act.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                               |                               |
| PoE Indicator                            | Green : PoE enabled LED x 24                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                               |                               |
| Fault contact                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                               |                               |
| Relay                                    | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | None                                          | Present                       |
| Power                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                               |                               |
| Power input                              | 100~240VAC with AC socket                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 100~240VAC with AC socket                     | 50~ 57VDC with terminal block |
| Power supply                             | 1000 Watts                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 390 Watts                                     | power supply not included     |
| Power consumption (Typ.)                 | 75 Watts (PoE output not included)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 49 Watts                                      | 40 Watts                      |
| Max PoE output                           | 720 Watts (-20°C~50°C)<br>320 Watts (50°C~60°C)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 300Watts (-20°C~50°C)<br>240Watts (50°C~60°C) | 720Watts                      |
| Overload current protection              | Present                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                               |                               |
| Reverse Polarity Protection              | Not Present                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                               |                               |
| Physical Characteristic                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                               |                               |
| Enclosure                                | 19 inches rack mountable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                               |                               |
| Dimension (W x D x H)                    | 431 (W) x 342 (D) x 44 (H)mm (16.97 x 13.46 x 1.73 inch)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                               |                               |
| Weight (g)                               | 6,270 g                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 5,580 g                                       | 4,445 g                       |
| Environmental                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                               |                               |
| Storage Temperature                      | -40 to 85°C (-40 to 185°F)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                               |                               |
| Operating Temperature                    | -20 to 60°C (-4 to 140°F)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                               |                               |
| Operating Humidity                       | 5% to 95% Non-condensing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                               |                               |

\*NOTE: This function is available by request only

| Regulatory approvals |                                                                                                                                                                                     |             |             |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|
| EMC                  | CE EMC (EN 55024, EN 55032), FCC Part 15 B                                                                                                                                          |             |             |
| EMI                  | EN 55032, CISPR32, EN 61000-3-2, EN 61000-3-3, FCC Part 15 B class A                                                                                                                |             |             |
| EMS                  | EN 55024 (IEC/EN 61000-4-2 (ESD), IEC/EN 61000-4-3 (RS), IEC/EN 61000-4-4 (EFT), IEC/EN 61000-4-5 (Surge), IEC/EN 61000-4-6 (CS), IEC/EN 61000-4-8 (PFMF), IEC/EN 61000-4-11 (DIP)) |             |             |
| Shock                | IEC 60068-2-27                                                                                                                                                                      |             |             |
| Free Fall            | IEC 60068-2-31                                                                                                                                                                      |             |             |
| Vibration            | IEC 60068-2-6                                                                                                                                                                       |             |             |
| Safety               | EN 60950-1                                                                                                                                                                          |             |             |
| MTBF                 | 249,143 hrs                                                                                                                                                                         | 214,432 hrs | 296,701 hrs |
| Warranty             | 5 years                                                                                                                                                                             |             |             |

## Ordering Information

RGPS-R9 **AA** **B** **CCC** - **DD**

| Code Definition | 10/100/1000Base-T(X) P.S.E. Port Number | Additional Port Number | Additional Port Type                       | Power Supply Type                                                                                      |
|-----------------|-----------------------------------------|------------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------|
| Option          | - <b>24</b> : 24 ports                  | - <b>4</b> : 4 ports   | - <b>GP+</b> : 1G / 10GBase-X, SFP+ socket | : without power supply<br>- <b>P</b> : 1000 Watts power supply<br>- <b>LP</b> : 390 Watts power supply |

| Available Model                                                                                                                                                                                                                                 | Model Name          | Description                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                 | RGPS-R9244GP+-P_US  | Industrial Layer-3 28-port managed Gigabit PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x1G/10GBase-X, SFP+ socket, high watts power supply included, US power cord                                                                                                                                                                  |
|                                                                                                                                                                                                                                                 | RGPS-R9244GP+-P_EU  | Industrial Layer-3 28-port managed Gigabit PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x1G/10GBase-X, SFP+ socket, high watts power supply included, EU power cord                                                                                                                                                                  |
|                                                                                                                                                                                                                                                 | RGPS-R9244GP+-P_UK  | Industrial Layer-3 28-port managed Gigabit PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x1G/10GBase-X, SFP+ socket, high watts power supply included, UK power cord                                                                                                                                                                  |
|                                                                                                                                                                                                                                                 | RGPS-R9244GP+-P_JP  | Industrial Layer-3 28-port managed Gigabit PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x1G/10GBase-X, SFP+ socket, high watts power supply included, JP power cord                                                                                                                                                                  |
|                                                                                                                                                                                                                                                 | RGPS-R9244GP+-P_AU  | Industrial Layer-3 28-port managed Gigabit PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x1G/10GBase-X, SFP+ socket, high watts power supply included, AU power cord                                                                                                                                                                  |
|                                                                                                                                                                                                                                                 | RGPS-R9244GP+-LP_US | Industrial Layer-3 28-port managed Gigabit PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x1G/10GBase-X, SFP+ socket, low watts power supply included, US power cord                                                                                                                                                                   |
|                                                                                                                                                                                                                                                 | RGPS-R9244GP+-LP_EU | Industrial Layer-3 28-port managed Gigabit PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x1G/10GBase-X, SFP+ socket, low watts power supply included, EU power cord                                                                                                                                                                   |
|                                                                                                                                                                                                                                                 | RGPS-R9244GP+-LP_UK | Industrial Layer-3 28-port managed Gigabit PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x1G/10GBase-X, SFP+ socket, low watts power supply included, UK power cord                                                                                                                                                                   |
|                                                                                                                                                                                                                                                 | RGPS-R9244GP+-LP_JP | Industrial Layer-3 28-port managed Gigabit PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x1G/10GBase-X, SFP+ socket, low watts power supply included, JP power cord                                                                                                                                                                   |
|                                                                                                                                                                                                                                                 | RGPS-R9244GP+-LP_AU | Industrial Layer-3 28-port managed Gigabit PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x1G/10GBase-X, SFP+ socket, low watts power supply included, AU power cord                                                                                                                                                                   |
|                                                                                                                                                                                                                                                 | RGPS-R9244GP+       | Industrial Layer-3 28-port managed Gigabit PoE Ethernet switch with 24x10/100/1000Base-T(X) P.S.E. and 4x1G/10GBase-X, SFP+ socket                                                                                                                                                                                                                   |
| <b>Packing List</b> <ul style="list-style-type: none"> <li>RGPS-R9244GP+/-P/-LP x 1</li> <li>Rack-mount Kit x 1</li> <li>ORing Tool CD x 1</li> <li>Power Cable x 1</li> <li>Quick Installation Guide x 1</li> <li>Console Cable x 1</li> </ul> |                     | <b>Optional Accessories (Can be purchased separately)</b> <ul style="list-style-type: none"> <li>Open-Vision M500 : Powerful Network Management Windows Utility Suit, 500 IP devices</li> <li>DBU-01 : backup unit device</li> <li>SFP1G series : 1GMbps SFP optical transceiver</li> <li>SFP10G series : 10GMbps SFP optical transceiver</li> </ul> |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.