



## "Application-specific" analogue extensions XA04W Part number 88972805



- XA04W : Mix of inputs in the same casing : Pt 100, pH, ORP (Redox), Current (4 - 20 mA)
- XA03 : 3 Pt 100 temperature inputs in the same casing
- "Application-specific" examples :
  - Regulation and measurement of (XA03)
  - pH and Redox sensors for treating water in swimming pools and fountains (XA04W)
- For Pt100 probes, see page 54.
- For pH and ORP probes, see page 78. The probes are directly connected to the XA04W exten

### General environment characteristics for CB, CD, XD, XB, XR and XE product types

|                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Certifications                                                             | CE, UL, CSA except for 88 974 441 and 88 974 561 (Removable Block Terminal versions)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Conformity to standards (with the low voltage directive and EMC directive) | IEC/EN 61131-2 (Open equipment)<br>IEC/EN 61131-2 (Zone B)<br>IEC/EN 61000-6-2,<br>IEC/EN 61000-6-3 (*)<br>IEC/EN 61000-6-4<br>(*) Except configuration (88 970 1.1 or 88 970 1.2) + (88 970 250 or 88 970 270) + 88 970 241 class A (class B in a metal enclosure)                                                                                                                                                                                                                                                                                                        |
| Earthing                                                                   | Not included                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Protection rating                                                          | In accordance with IEC/EN 60529 :<br>IP40 on front panel<br>IP20 on terminal block                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Overvoltage category                                                       | 3 in accordance with IEC/EN 60664-1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Pollution                                                                  | Degree : 2 in accordance with IEC/EN 61131-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Max operating Altitude                                                     | Operation : 2000 m<br>Transport : 3048 m                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Mechanical resistance                                                      | Immunity to vibrations IEC/EN 60068-2-6, test Fc<br>Immunity to shock IEC/EN 60068-2-27, test Ea                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Resistance to electrostatic discharge                                      | Immunity to ESD<br>IEC/EN 61000-4-2, level 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Resistance to HF interference                                              | Immunity to radiated electrostatic fields<br>IEC/EN 61000-4-3<br>Immunity to fast transients (burst immunity)<br>IEC/EN 61000-4-4, level 3<br>Immunity to shock waves<br>IEC/EN 61000-4-5<br>Radio frequency in common mode<br>IEC/EN 61000-4-6, level 3<br>Voltage dips and breaks (AC)<br>IEC/EN 61000-4-11<br>Immunity to damped oscillatory waves<br>IEC/EN 61000-4-12                                                                                                                                                                                                 |
| Conducted and radiated emissions                                           | Class B (*) in accordance with EN 55022, EN55011 (CISPR22, CISPR 11) group 1<br>(*) Except configuration (88 970 1.1 or 88 970 1.2) + (88 970 250 or 88 970 270) + 88 970 241 class A (class B in a metal enclosure)                                                                                                                                                                                                                                                                                                                                                       |
| Operating temperature                                                      | -20 → +70 °C<br>except CB and XB versions in VDC : -30 → +70 °C in accordance with IEC/EN 60068-2-1 and IEC/EN 60068-2-2                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Storage temperature                                                        | -40 → +70 °C in accordance with IEC/EN 60068-2-1 and IEC/EN 60068-2-2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Relative humidity                                                          | 95 % max. (no condensation or dripping water) in accordance with IEC/EN 60068-2-30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Mounting                                                                   | On symmetrical DIN rail, 35 x 7.5 mm and 35 x 15 mm, or on panel (2 x Ø 4 mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Screw terminals connection capacity                                        | Flexible wire with ferrule =<br>1 conductor : 0.25 to 2.5 mm <sup>2</sup> (AWG 24...AWG 14)<br>2 conductors 0.25 to 0.75 mm <sup>2</sup> (AWG 24...AWG 18)<br>Semi-rigid wire =<br>1 conductor : 0.2 to 2.5 mm <sup>2</sup> (AWG 25...AWG 14)<br>Rigid wire =<br>1 conductor : 0.2 to 2.5 mm <sup>2</sup> (AWG 25...AWG 14)<br>2 conductors 0.2 to 1.5 mm <sup>2</sup> (AWG 25...AWG 16)<br>Tightening torque =<br>0.5 N.m (4.5 lb-in) (tighten using screwdriver diam. 3.5 mm)<br>Also valid for spring cage connectors (ref 88 970 313 and 88 970 317 for the RBT range) |

### General characteristics

| 88970800                                                                                                               | 88972805                        | 88972805                        | 88972805                        | 88972805                        |                                 |
|------------------------------------------------------------------------------------------------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| See General characteristics for the XA04 analogue extension on page 36, except for the adapted characteristics below : | *** TRADUCTION<br>MANQUANTE *** | *** TRADUCTION<br>MANQUANTE *** | *** TRADUCTION<br>MANQUANTE *** | *** TRADUCTION<br>MANQUANTE *** |                                 |
| Inputs                                                                                                                 | Pt 100 (IP, IQ, IR)             | Pt 100 (IP)                     | pH (IQ)                         | ORP (IR)                        | 4-20 mA (IS)                    |
| Certifications                                                                                                         | UL, CSA,                        | UL & CSA                        | *** TRADUCTION<br>MANQUANTE *** | *** TRADUCTION<br>MANQUANTE *** | *** TRADUCTION<br>MANQUANTE *** |

|                                                      |                                                                                                                                  |                                                                             |                                                                             |                                 |                                 |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------|---------------------------------|
| Conformity with the EMC directive                    | In accordance with 89/336/EEC :<br>EN (IEC) 61131-2 (Zone B)<br>EN (IEC) 61000-6-2,<br>EN (IEC) 61000-6-3,<br>EN (IEC) 61000-6-4 | In accordance with 89/336/EEC :<br>EN (IEC) 61000-6-1<br>EN (IEC) 61000-6-3 | *** TRADUCTION<br>MANQUANTE ***                                             | *** TRADUCTION<br>MANQUANTE *** | *** TRADUCTION<br>MANQUANTE *** |
| Operating range                                      | -25 °C, + 125 °C                                                                                                                 | 0-50 °C                                                                     | 0 - 14                                                                      | 0 - 1000 mV                     | 0 - 20 mA                       |
| Input impedance                                      | -                                                                                                                                | -                                                                           | > 10 <sup>12</sup> &ohm;                                                    | > 10 <sup>12</sup> &ohm;        | 10 Ω                            |
| Maximum non destructive current/voltage              | -                                                                                                                                | -                                                                           | -                                                                           | -                               | 30 mA                           |
| Resolution                                           | 10 bits                                                                                                                          | 12 bits                                                                     | 12 bits                                                                     | 12 bits                         | 12 bits                         |
| Value of LSB                                         | 0,15 °C                                                                                                                          | 0,012 °C                                                                    | 0,0034 pH                                                                   | 0,24 mV                         | 4,9 µA                          |
| Input type                                           | Pt 100 probe<br>IEC 751<br>3-wire                                                                                                | Pt 100 probe<br>IEC 751<br>3-wire                                           | pH probe                                                                    | ORP probe                       | Common mode                     |
| Conversion time                                      | Module cycle time                                                                                                                | Module cycle time                                                           | Module cycle time                                                           | Module cycle time               | Module cycle time               |
| Sampling time                                        | <1s                                                                                                                              | 4s                                                                          | 4s                                                                          | 4s                              | 4s                              |
| Accuracy at 25 °C ambient temperature                | ± 1 °C                                                                                                                           | ± 0,8 °C                                                                    | ± 0,05 pH                                                                   | ± 5 mV                          | ± 0,1 mA                        |
| Accuracy at 55 °C ambient temperature                | ± 1 °C                                                                                                                           | ± 0,8 °C                                                                    | ± 0,05 pH                                                                   | ± 5 mV                          | ± 0,1 mA                        |
| Temperature compensation                             | -                                                                                                                                | -                                                                           | No<br>Drift of 0.03 pH from 15 to 25 °C<br>Drift of 0.15 pH from 0 to 50 °C | -                               | -                               |
| Isolation between analogue channel and power supply  | None                                                                                                                             | None                                                                        | Isolated                                                                    | Isolated                        | Isolated                        |
| Dedicated isolated 24 V DC output for 4-20 mA sensor | -                                                                                                                                | -                                                                           | -                                                                           | -                               | 24 V DC                         |
| Cable length                                         | 10 m max. with shielded cable                                                                                                    | 3 m max. with shielded cable                                                | 3 m max. with shielded cable                                                | 3 m max. with shielded cable    | 3 m max. with shielded cable    |
| Protection against polarity inversions               | -                                                                                                                                | -                                                                           | -                                                                           | -                               | Yes                             |

#### Processing characteristics of CB, CD, XD & XB product types

|                                            |                                                                                                                                      |
|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| LCD display                                | CD, XD : Display with 4 lines of 18 characters                                                                                       |
| Programming method                         | Ladder or FBD/SFC (Grafcet)                                                                                                          |
| Program size                               | Ladder : 120 lines<br>FBD :<br>CB, CD : 350 typical blocks<br>XB, XD : 700 typical blocks                                            |
| Program memory                             | Flash EEPROM                                                                                                                         |
| Removable memory                           | EEPROM                                                                                                                               |
| Data memory                                | 368 bits/200 words                                                                                                                   |
| Back-up time in the event of power failure | Program and settings in the controller : 10 years<br>Program and settings in the plug-in memory : 10 years<br>Data memory : 10 years |
| Cycle time                                 | Ladder : typically 20 ms<br>FBD : 6 →90 ms                                                                                           |
| Response time                              | Input acquisition time + 1 to 2 cycle times                                                                                          |
| Clock data retention                       | 10 years (lithium battery) at 25 °C                                                                                                  |
| Clock drift                                | Drift < 12 min/year (at 25 °C)<br>6 s/month (at 25 °C with user-definable correction of drift)                                       |
| Timer block accuracy                       | 1 % ± 2 cycle times                                                                                                                  |
| Start up time on power up                  | < 1,2 s                                                                                                                              |

#### Characteristics of products with AC power supplied

|                                |                                                                                                                                     |                                                                                                                                     |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <b>Supply</b>                  |                                                                                                                                     |                                                                                                                                     |
| Nominal voltage                | 24 V AC                                                                                                                             | 100 →240 V AC                                                                                                                       |
| Operating limits               | -15 % / +20 %<br>or 20.4 V AC→28.8 V AC                                                                                             | -15 % / +10 %<br>or 85 V AC→264 V AC                                                                                                |
| Supply frequency range         | 50/60 Hz (+4 % / -6 %)<br>or 47 →53 Hz/57 →63 Hz                                                                                    | 50/60 Hz (+ 4 % / - 6 %) or 47 →53 Hz/57 →63 Hz                                                                                     |
| Immunity from micro power cuts | 10 ms (repetition 20 times)                                                                                                         | 10 ms (repetition 20 times)                                                                                                         |
| Max. absorbed power            | CB12-CD12-XD10-XB10 : 4 VA<br>CB20-CD20 : 6 VA<br>XD10-XB10 with extension - XD26-XB26 : 7.5 VA<br>XD26-XB26 with extension : 10 VA | CB12-CD12-XD10-XB10 : 7 VA<br>CB20-CD20 : 11 VA<br>XD10-XB10 with extension - XD26-XB26 : 12 VA<br>XD26-XB26 with extension : 17 VA |
| Isolation voltage              | 1780 V AC                                                                                                                           | 1780 V AC                                                                                                                           |

|                                                |                                                                                          |                                                                                          |
|------------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| <b>Inputs</b>                                  |                                                                                          |                                                                                          |
| Input voltage                                  | 24 V AC (-15 % / +20 %)                                                                  | 100 →240 V AC (-15 % / +10 %)                                                            |
| Input current                                  | 4.4 mA @ 20.4 V AC<br>5.2 mA @ 24.0 V AC<br>6.3 mA @ 28.8 V AC                           | 0.24 mA @ 85 V AC<br>0.75 mA @ 264 V AC                                                  |
| Input impedance                                | 4.6 kΩ                                                                                   | 350 kΩ                                                                                   |
| Logic 1 voltage threshold                      | ≥ 14 V AC                                                                                | ≥ 79 V AC                                                                                |
| Making current at logic state 1                | > 2 mA                                                                                   | > 0.17 mA                                                                                |
| Logic 0 voltage threshold                      | ≤ 5 V AC                                                                                 | ≤ 20 V AC (≤ 28 V AC : XE10, XR06, XR10, XR14)                                           |
| Release current at logic state 0               | < 0.5 mA                                                                                 | < 0.5 mA                                                                                 |
| Response time with LADDER programming          | 50 ms<br>State 0 →1 (50/60 Hz)                                                           | 50 ms<br>State 0 →1 (50/60 Hz)                                                           |
| Response time with function blocks programming | Configurable in increments of 10 ms<br>50 ms min. up to 255 ms<br>State 0 →1 (50/60 Hz)  | Configurable in increments of 10 ms<br>50 ms min. up to 255 ms<br>State 0 →1 (50/60 Hz)  |
| Maximum counting frequency                     | In accordance with cycle time (Tc) and input response time (Tr) :<br>1/ ( (2 x Tc) + Tr) | In accordance with cycle time (Tc) and input response time (Tr) :<br>1/ ( (2 x Tc) + Tr) |
| Sensor type                                    | Contact or 3-wire PNP                                                                    | Contact or 3-wire PNP                                                                    |

|                                           |                             |                             |
|-------------------------------------------|-----------------------------|-----------------------------|
| Input type                                | Resistive                   | Resistive                   |
| Isolation between power supply and inputs | None                        | None                        |
| Isolation between inputs                  | None                        | None                        |
| Protection against polarity inversions    | Yes                         | Yes                         |
| Status indicator                          | On LCD screen for CD and XD | On LCD screen for CD and XD |

#### Characteristics of relay outputs common to the entire range

|                                                    |                                                                                                                                                                                                                                                                   |
|----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Max. breaking voltage                              | 5 →30 V DC<br>24 →250 V AC                                                                                                                                                                                                                                        |
| Breaking current                                   | CB-CD-XD10-XB10-XR06-XR10 : 8 A<br>XD26-XB26 : 8 x 8 A relays, 2 x 5 A relays<br>XE10 : 4 x 5 A relays<br>XR14 : 4 x 8 A relays, 2 x 5 A relays<br>RBT (Removable Terminal Blocks) versions : verify the maximum current according to the type of connection used |
| Electrical durability for 500 000 operating cycles | Utilization category DC-12 : 24 V, 1.5 A<br>Utilization category DC-13 : 24 V (L/R = 10 ms), 0.6 A<br>Utilization category AC-12 : 230 V, 1.5 A<br>Utilization category AC-15 : 230 V, 0.9 A                                                                      |
| Max. Output Common Current                         | 12 A for O8, O9, OA                                                                                                                                                                                                                                               |
| Minimum switching capacity                         | 10 mA (at minimum voltage of 12 V)                                                                                                                                                                                                                                |
| Minimum load                                       | 12 V, 10 mA                                                                                                                                                                                                                                                       |
| Maximum rate                                       | Off load : 10 Hz<br>At operating current : 0.1 Hz                                                                                                                                                                                                                 |
| Mechanical life                                    | 10,000,000 (operations)                                                                                                                                                                                                                                           |
| Voltage for withstanding shocks                    | In accordance with IEC/EN 60947-1 and IEC/EN 60664-1 : 4 kV                                                                                                                                                                                                       |
| Response time                                      | Make 10 ms<br>Release 5 ms                                                                                                                                                                                                                                        |
| Built-in protections                               | Against short-circuits : None<br>Against overvoltages and overloads : None                                                                                                                                                                                        |
| Status indicator                                   | On LCD screen for CD and XD                                                                                                                                                                                                                                       |

#### Characteristics of product with DC power supplied

|                                        |                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                           |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Supply</b>                          |                                                                                                                                                                     |                                                                                                                                                                                                                                                                                                           |
| Nominal voltage                        | 12 V DC                                                                                                                                                             | 24 V DC                                                                                                                                                                                                                                                                                                   |
| Operating limits                       | -13 % / +20 %<br>or 10.4 V DC→14.4 V DC (including ripple)                                                                                                          | -20 % / +25 %<br>or 19.2 V DC→30 V DC (including ripple)                                                                                                                                                                                                                                                  |
| Immunity from micro power cuts         | ≤ 1 ms (repetition 20 times)                                                                                                                                        | ≤ 1 ms (repetition 20 times)                                                                                                                                                                                                                                                                              |
| Max. absorbed power                    | CB12 with solid state outputs : 1.5 W<br>CD12 : 1.5 W<br>CD20 : 2.5 W<br>XD26-XB26 : 3 W<br>XD26-XB26 with extension : 5 W<br>XD26 with solid state outputs : 2.5 W | CB12-CD12-CD20 with solid state outputs - XD10-XB10 with solid state outputs : 3 W<br>XD10-XB10 with relay outputs : 4 W<br>XD26-XB26 with solid state outputs : 5 W<br>CB20-CD20 with relay outputs - XD26 with relay outputs : 6 W<br>XD10-XB10 with extension : 8 W<br>XD26-XB26 with extension : 10 W |
| Protection against polarity inversions | Yes                                                                                                                                                                 | Yes                                                                                                                                                                                                                                                                                                       |

#### Digital inputs (I1 to IA and IH to IY)

|                                           |                                                                                                                                                                             |                                                                                                                                                                             |
|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input voltage                             | 12 V DC (-13 % / +20 %)                                                                                                                                                     | 24 V DC (-20 % / +25 %)                                                                                                                                                     |
| Input current                             | 3.9 mA @ 10.44 V DC<br>4.4 mA @ 12.0 V DC<br>5.3 mA @ 14.4 VDC                                                                                                              | 2.6 mA @ 19.2 V DC<br>3.2 mA @ 24 V DC<br>4.0 mA @ 30.0 VDC                                                                                                                 |
| Input impedance                           | 2.7 kΩ                                                                                                                                                                      | 7.4 kΩ                                                                                                                                                                      |
| Logic 1 voltage threshold                 | ≥ 7 V DC                                                                                                                                                                    | ≥ 15 V DC                                                                                                                                                                   |
| Making current at logic state 1           | ≥ 2 mA                                                                                                                                                                      | ≥ 2.2 mA                                                                                                                                                                    |
| Logic 0 voltage threshold                 | ≤ 3 V DC                                                                                                                                                                    | ≤ 5 V DC                                                                                                                                                                    |
| Release current at logic state 0          | < 0.9 mA                                                                                                                                                                    | < 0.75 mA                                                                                                                                                                   |
| Response time                             | 1 →2 cycle times                                                                                                                                                            | 1 →2 cycle times                                                                                                                                                            |
| Maximum counting frequency                | Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up to 6 k Hz)<br>Inputs I3 to IA & IH to IY : In accordance with cycle time (Tc) and input response time (Tr) : 1/ ( (2 x Tc) + Tr) | Inputs I1 & I2 : Ladder (1 k Hz) & FBD (up to 6 k Hz)<br>Inputs I3 to IA & IH to IY : In accordance with cycle time (Tc) and input response time (Tr) : 1/ ( (2 x Tc) + Tr) |
| Sensor type                               | Contact or 3-wire PNP                                                                                                                                                       | Contact or 3-wire PNP                                                                                                                                                       |
| Conforming to IEC/EN 61131-2              | Type 1                                                                                                                                                                      | Type 1                                                                                                                                                                      |
| Input type                                | Resistive                                                                                                                                                                   | Resistive                                                                                                                                                                   |
| Isolation between power supply and inputs | None                                                                                                                                                                        | None                                                                                                                                                                        |
| Isolation between inputs                  | None                                                                                                                                                                        | None                                                                                                                                                                        |
| Protection against polarity inversions    | Yes                                                                                                                                                                         | Yes                                                                                                                                                                         |
| Status indicator                          | On LCD screen for CD and XD                                                                                                                                                 | On LCD screen for CD and XD                                                                                                                                                 |

#### Analogue or digital inputs (IB to IG)

|                     |                 |                 |
|---------------------|-----------------|-----------------|
| CB12-CD12-XD10-XB10 | 4 inputs IB →IE | 4 inputs IB →IE |
| CB20-CD20-XB26-XD26 | 6 inputs IB →IG | 6 inputs IB →IG |

#### Inputs used as analogue inputs

|                                                     |                                                         |                                                         |
|-----------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------|
| Measurement range                                   | (0 →10 V) or (0 →V power supply)                        | (0 →10 V) or (0 →V power supply)                        |
| Input impedance                                     | 14 kΩ                                                   | 12 kΩ                                                   |
| Input voltage                                       | 14.4 V DC max.                                          | 30 V DC max.                                            |
| Value of LSB                                        | 14 mV, 4 mA                                             | 29 mV, 4 mA                                             |
| Input type                                          | Common mode                                             | Common mode                                             |
| Resolution                                          | 10 bits at max. input voltage                           | 10 bits at max. input voltage                           |
| Conversion time                                     | Controller cycle time                                   | Controller cycle time                                   |
| Accuracy at 25 °C                                   | ± 5 %                                                   | ± 5 %                                                   |
| Accuracy at 55 °C                                   | ± 6.2 %                                                 | ± 6.2 %                                                 |
| Repeat accuracy at 55 °C                            | ± 2 %                                                   | ± 2 %                                                   |
| Isolation between analogue channel and power supply | None                                                    | None                                                    |
| Cable length                                        | 10 m maximum, with shielded cable (sensor not isolated) | 10 m maximum, with shielded cable (sensor not isolated) |

|                                        |                                          |                                          |
|----------------------------------------|------------------------------------------|------------------------------------------|
| Protection against polarity inversions | Yes                                      | Yes                                      |
| Potentiometer control                  | 2.2 kΩ/0.5 W (recommended)<br>10 kΩ max. | 2.2 kΩ/0.5 W (recommended)<br>10 kΩ max. |

#### Inputs used as digital inputs

|                                           |                                                                                          |                                                                                          |
|-------------------------------------------|------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| Input voltage                             | 12 V DC (-13 % / +20 %)                                                                  | 24 V DC (-20 % / +25 %)                                                                  |
| Input current                             | 0.7 mA @ 10.44 VDC<br>0.9 mA @ 12.0 VDC<br>1.0 mA @ 14.4VDC                              | 1.6 mA @ 19.2 VDC<br>2.0 mA @ 24.0 V DC<br>2.5 mA @ 30.0 VDC                             |
| Input impedance                           | 14 kΩ                                                                                    | 12 kΩ                                                                                    |
| Logic 1 voltage threshold                 | ≥ 7 V DC                                                                                 | ≥ 15 VDC                                                                                 |
| Making current at logic state 1           | ≥ 0.5 mA                                                                                 | ≥ 1.2 mA                                                                                 |
| Logic 0 voltage threshold                 | ≤ 3 V DC                                                                                 | ≤ 5 V DC                                                                                 |
| Release current at logic state 0          | ≤ 0.2 mA                                                                                 | ≤ 0.5 mA                                                                                 |
| Response time                             | 1 →2 cycle times                                                                         | 1 →2 cycle times                                                                         |
| Maximum counting frequency                | In accordance with cycle time (Tc) and input response time (Tr) :<br>1/ ( (2 x Tc) + Tr) | In accordance with cycle time (Tc) and input response time (Tr) :<br>1/ ( (2 x Tc) + Tr) |
| Sensor type                               | Contact or 3-wire PNP                                                                    | Contact or 3-wire PNP                                                                    |
| Conforming to IEC/EN 61131-2              | Type 1                                                                                   | Type 1                                                                                   |
| Input type                                | Resistive                                                                                | Resistive                                                                                |
| Isolation between power supply and inputs | None                                                                                     | None                                                                                     |
| Isolation between inputs                  | None                                                                                     | None                                                                                     |
| Protection against polarity inversions    | Yes                                                                                      | Yes                                                                                      |
| Status indicator                          | On LCD screen for CD and XD                                                              | On LCD screen for CD and XD                                                              |

#### Characteristics of relay outputs common to the entire range


|                                                    |                                                                                                                                                                                              |  |
|----------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Max. breaking voltage                              | 5 →30 V DC<br>24 →250 V AC                                                                                                                                                                   |  |
| Max. Output Common Current                         | 12A (10A UL) for O8, O9, OA                                                                                                                                                                  |  |
| Breaking current                                   | CB-CD-XD10-XB10-XR06-XR10 : 8 A<br>XD26-XB26 : 8 x 8 A relays, 2 x 5 A relays<br>XE10 : 4 x 5 A relays<br>XR14 : 4 x 8 A relays, 2 x 5 A relays                                              |  |
| Electrical durability for 500 000 operating cycles | Utilization category DC-12 : 24 V, 1.5 A<br>Utilization category DC-13 : 24 V (L/R = 10 ms), 0.6 A<br>Utilization category AC-12 : 230 V, 1.5 A<br>Utilization category AC-15 : 230 V, 0.9 A |  |
| Minimum switching capacity                         | 10 mA (at minimum voltage of 12 V)                                                                                                                                                           |  |
| Minimum load                                       | 12 V, 10 mA                                                                                                                                                                                  |  |
| Maximum rate                                       | Off load : 10 Hz<br>At operating current : 0.1 Hz                                                                                                                                            |  |
| Mechanical life                                    | 10,000,000 (operations)                                                                                                                                                                      |  |
| Voltage for withstanding shocks                    | In accordance with IEC/EN 60947-1 and IEC/EN 60664-1 : 4 kV                                                                                                                                  |  |
| Response time                                      | Make 10 ms<br>Release 5 ms                                                                                                                                                                   |  |
| Built-in protections                               | Against short-circuits : None<br>Against overvoltages and overloads : None                                                                                                                   |  |
| Status indicator                                   | On LCD screen for CD and XD                                                                                                                                                                  |  |

#### Digital / PWM solid state output

|                                                  |                                                                                                                                                                                                                        |                                                                                                                                                                                                                        |
|--------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PWM solid state output*                          | CB12 : O4<br>XD26 : O4 →O7                                                                                                                                                                                             | CD12-XD10-XB10 : O4<br>CD20-XD26-XB26 : O4 →O7                                                                                                                                                                         |
| * Only available with "FBD" programming language | * Only available with "FBD" programming language                                                                                                                                                                       |                                                                                                                                                                                                                        |
| Breaking voltage                                 | 10.4 →30 V DC                                                                                                                                                                                                          | 19.2 →30 V DC                                                                                                                                                                                                          |
| Nominal voltage                                  | 12-24 VDC                                                                                                                                                                                                              | 24 V DC                                                                                                                                                                                                                |
| Nominal current                                  | 0.5 A                                                                                                                                                                                                                  | 0.5 A                                                                                                                                                                                                                  |
| Max. breaking current                            | 0,625 A                                                                                                                                                                                                                | 0,625 A                                                                                                                                                                                                                |
| Voltage drop                                     | ≤ 2 V for I = 0.5 A (at state 1)                                                                                                                                                                                       | ≤ 2 V for I = 0.5 A (at state 1)                                                                                                                                                                                       |
| Response time                                    | Make ≤ 1 ms<br>Release ≤ 1 ms                                                                                                                                                                                          | Make ≤ 1 ms<br>Release ≤ 1 ms                                                                                                                                                                                          |
| Built-in protections                             | Against overloads and short-circuits : Yes<br>Against overvoltages (*) : Yes<br>Against inversions of power supply : Yes<br>(*) In the absence of a volt-free contact between the logic controller output and the load | Against overloads and short-circuits : Yes<br>Against overvoltages (*) : Yes<br>Against inversions of power supply : Yes<br>(*) In the absence of a volt-free contact between the logic controller output and the load |
| Min. load                                        | 1 mA                                                                                                                                                                                                                   | 1 mA                                                                                                                                                                                                                   |
| Maximum incandescent load                        | 0,2 A / 12 V DC<br>0,1 A / 24 V DC                                                                                                                                                                                     | 0,1 A / 24 V DC                                                                                                                                                                                                        |
| Galvanic isolation                               | No                                                                                                                                                                                                                     | No                                                                                                                                                                                                                     |
| PWM frequency                                    | 14.11 Hz<br>56.45 Hz<br>112.90 Hz<br>225.80 Hz<br>451.59 Hz<br>1806.37 Hz                                                                                                                                              | 14.11 Hz<br>56.45 Hz<br>112.90 Hz<br>225.80 Hz<br>451.59 Hz<br>1806.37 Hz                                                                                                                                              |
| PWM cyclic ratio                                 | 0 →100 % (256 steps for CD, XD and 1024 steps for XA)                                                                                                                                                                  | 0 →100 % (256 steps for CD, XD and 1024 steps for XA)                                                                                                                                                                  |
| PWM accuracy at 120 Hz                           | < 5 % (20 % →80 %) load at 10 mA                                                                                                                                                                                       | < 5 % (20 % →80 %) load at 10 mA                                                                                                                                                                                       |
| PWM accuracy at 500 Hz                           | < 10 % (20 % →80 %) load at 10 mA                                                                                                                                                                                      | < 10 % (20 % →80 %) load at 10 mA                                                                                                                                                                                      |
| Status indicator                                 | On LCD screen for XD                                                                                                                                                                                                   | On LCD screen for CD and XD                                                                                                                                                                                            |

| Type    | Description                                                                      | Code     |
|---------|----------------------------------------------------------------------------------|----------|
| M3 SOFT | Multilingual programming software containing specific library functions (CD-ROM) | 88970111 |

## Dimension Diagram : XA04W

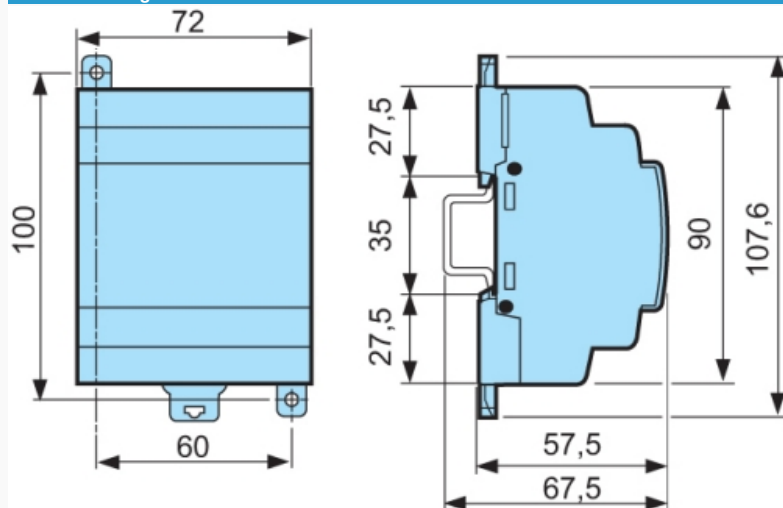

## Special adaptations

- 2 or 3-wire Pt 1000 inputs
- Adjustable temperature range
- Option to select/limit the number of temperature, Pt100 and Pt1000 inputs (up to 3)
- Option to mix and/or choose inputs (Pt100, pH, ORP, 4-20 mA, 0-10 V)
- Modified resolution (10 bits, 12 bits)
- Bare board version
- Resin casing version
- Customer labelling



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.