



# MC33171 - MC35171

## LOW POWER SINGLE BIPOLAR OPERATIONAL AMPLIFIERS

- GOOD CONSUMPTION/SPEED RATIO :  
ONLY 200 $\mu$ A FOR 2.1MHz, 2V/ $\mu$ s
- SINGLE (OR DUAL) SUPPLY OPERATION  
FROM +4V TO +44V ( $\pm$ 2V TO  $\pm$ 22V)
- WIDE INPUT COMMON MODE MODE  
VOLTAGE RANGE INCLUDING  $V_{CC}^-$
- LOW LEVEL OUTPUT VOLTAGE CLOSE TO  
 $V_{CC}^-$  : 100mV TYPICAL
- PIN TO PIN COMPATIBLE WITH  
STANDARD SINGLE OP-AMPS

### DESCRIPTION

The MC3x171 series are single bipolar operational amplifiers offering both low consumption (200 $\mu$ A) and good speed (2.1MHz, 2V/ $\mu$ s).

Moreover the Input Common Mode Range extends down to the lower supply rail, allowing single supply operation from +4V to +44V.

### ORDER CODE

| Part Number        | Temperature Range | Package |   |
|--------------------|-------------------|---------|---|
|                    |                   | N       | D |
| MC33171            | -40°C, +105°C     | •       | • |
| MC35171            | -55°C, +125°C     | •       | • |
| Example : MC33171N |                   |         |   |

N = Dual in Line Package (DIP)

D = Small Outline Package (SO) - also available in Tape & Reel (DT)




N  
DIP8  
(Plastic Package)




D  
SO8  
(Plastic Micropackage)


### PIN CONNECTIONS (top view)

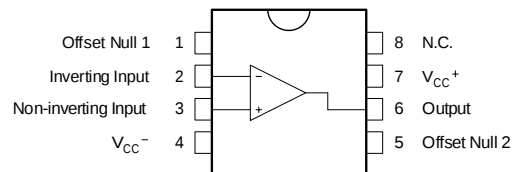

SCHEMATIC DIAGRAM

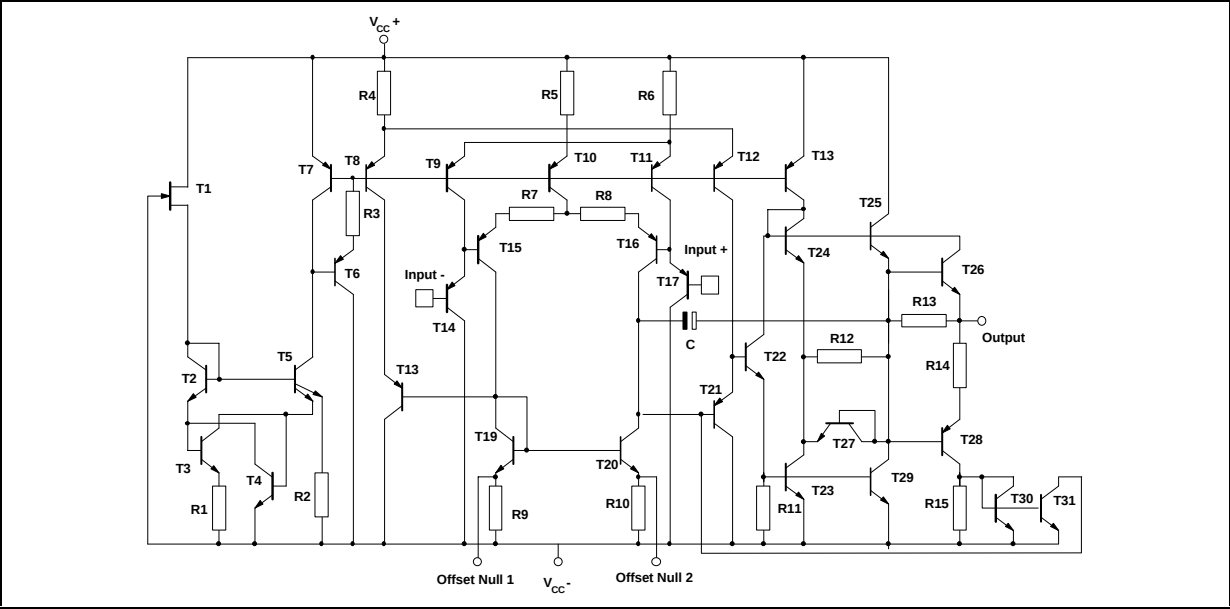

INPUT OFFSET VOLTAGE NULL CIRCUIT

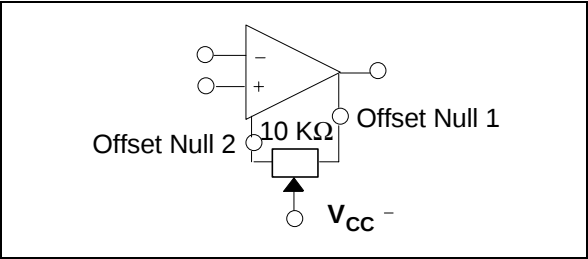

MAXIMUM RATINGS

| Symbol     | Parameter                            | Value              | Unit               |
|------------|--------------------------------------|--------------------|--------------------|
| $V_{CC}$   | Supply Voltage                       | $\pm 22$           | V                  |
| $V_{id}$   | Differential Input Voltage           | see note 1)        | V                  |
| $V_i$      | Input Voltage                        | see note 1         | V                  |
|            | Output Short Circuit Duration        | Indefinite         | s                  |
| $T_{oper}$ | Operating Free-Air Temperature range | MC33171<br>MC35171 | $^{\circ}\text{C}$ |
| $T_j$      | Junction Temperature                 | 150                | $^{\circ}\text{C}$ |
| $T_{stg}$  | Storage Temperature                  | -65 to 150         | $^{\circ}\text{C}$ |

1. Either or both input voltages must not exceed the magnitude of  $V_{CC}$ .

OPERATING CONDITIONS

| Symbol   | Parameter      | Value               | Unit |
|----------|----------------|---------------------|------|
| $V_{CC}$ | Supply Voltage | $\pm 2$ to $\pm 22$ | V    |


**ELECTRICAL CHARACTERISTICS**

$V_{CC}^{+} = +15V$ ,  $V_{CC}^{-} = -15V$ ,  $R_L$  connected to Ground,  $T_{amb} = 25^{\circ}C$  (unless otherwise specified)

| Symbol    | Parameter                                                                                                                                                                                                                                                        | Min.                                                                        | Typ.        | Max.                   | Unit                   |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-------------|------------------------|------------------------|
| $V_{io}$  | Input Offset Voltage<br>$V_{CC}^{+} = +15V$ , $V_{CC}^{-} = -15V$ , $V_{ic} = 0V$<br>$V_{CC}^{+} = 5V$ , $V_{CC}^{-} = 0V$ , $V_{ic} = 0V$ , $V_o = 1.4V$<br>$V_{CC}^{+} = +15V$ , $V_{CC}^{-} = -15V$ , $V_{ic} = 0V$ , $T_{min.} \leq T_{amb} \leq T_{max.}$   |                                                                             | 1<br>1      | 4.5<br>5<br>6.5        | mV                     |
| $DV_{io}$ | Input Offset Voltage Drift                                                                                                                                                                                                                                       |                                                                             | 10          |                        | $\mu V/^{\circ}C$      |
| $I_{io}$  | Input Offset Current ( $V_{ic} = 0V$ )<br>$T_{min.} \leq T_{amb} \leq T_{max.}$                                                                                                                                                                                  |                                                                             | 5           | 20<br>40               | nA                     |
| $I_{ib}$  | Input Bias Current ( $V_{ic} = 0V$ )<br>$T_{min.} \leq T_{amb} \leq T_{max.}$                                                                                                                                                                                    |                                                                             | 20          | 100<br>200             | nA                     |
| $A_{vd}$  | Large Signal Voltage Gain ( $R_L = 10k\Omega$ , $V_o = \pm 10V$ )<br>$T_{min.} \leq T_{amb} \leq T_{max.}$                                                                                                                                                       | 50<br>25                                                                    | 100         |                        | V/mV                   |
| $V_{OH}$  | High Level Output Voltage<br>$V_{CC}^{+} = 5V$ , $V_{CC}^{-} = 0V$ , $R_L = 10k\Omega$<br>$V_{CC}^{+} = +15V$ , $V_{CC}^{-} = -15V$ , $R_L = 10k\Omega$<br>$V_{CC}^{+} = +15V$ , $V_{CC}^{-} = -15V$ , $R_L = 10k\Omega$ , $T_{min.} \leq T_{amb} \leq T_{max.}$ | 3.5<br>13.6<br>13.3                                                         | 4.2<br>14.2 |                        | V                      |
| $V_{OL}$  | Low Level Output Voltage<br>$V_{CC}^{+} = 5V$ , $V_{CC}^{-} = 0V$ , $R_L = 10k\Omega$<br>$V_{CC}^{+} = +15V$ , $V_{CC}^{-} = -15V$ , $R_L = 10k\Omega$<br>$V_{CC}^{+} = +15V$ , $V_{CC}^{-} = -15V$ , $R_L = 10k\Omega$ , $T_{min.} \leq T_{amb} \leq T_{max.}$  |                                                                             | 0.1<br>-14  | 0.15<br>-13.6<br>-13.3 | V                      |
| $I_{sc}$  | Output Short Circuit Current ( $V_{id} = \pm 1V$ , $V_o = 0V$ )<br>Source<br>Sink                                                                                                                                                                                | 3<br>15                                                                     | 6<br>27     |                        | mA                     |
| $V_{icm}$ | Input Common Mode Voltage Range<br>$T_{min.} \leq T_{amb} \leq T_{max}$                                                                                                                                                                                          | $V_{CC}^{-}$ to $V_{CC}^{+} - 1.8)$<br>$V_{CC}^{-}$ to $(V_{CC}^{+} - 2.2)$ |             |                        | V                      |
| CMR       | Common-mode Rejection Ratio ( $V_{ic} = V_{icm \text{ min.}}$ )                                                                                                                                                                                                  | 80                                                                          | 100         |                        | dB                     |
| SVR       | Supply Voltage Rejection Ratio ( $V_{CC} = \pm 5$ to $\pm 15V$ )                                                                                                                                                                                                 | 80                                                                          | 100         |                        | dB                     |
| $I_{CC}$  | Supply Current<br>$V_{CC}^{+} = 5V$ , $V_{CC}^{-} = 0V$ , no load<br>$V_{CC}^{+} = +15V$ , $V_{CC}^{-} = -15V$ , no load<br>$V_{CC}^{+} = +15V$ , $V_{CC}^{-} = -15V$ no load, $T_{min.} \leq T_{amb} \leq T_{max.}$                                             |                                                                             | 200<br>220  | 250<br>250<br>300      | $\mu A$                |
| SR        | Slew Rate ( $V_i = \pm 10V$ , $R_L = 10k\Omega$ , $C_L = 100pF$ )                                                                                                                                                                                                | 1.6                                                                         | 2           |                        | V/ $\mu s$             |
| GBP       | Gain Bandwidth Product<br>$R_L = 10k\Omega$ , $C_L = 100pF$ , $f = 100kHz$                                                                                                                                                                                       | 1.4                                                                         | 2.1         |                        | MHz                    |
| $\phi_m$  | Phase Margin ( $R_L = 10k\Omega$ , $C_L = 100pF$ )                                                                                                                                                                                                               |                                                                             | 45          |                        | Degrees                |
| $e_n$     | Equivalent Input Noise Voltage ( $f = 1kHz$ )                                                                                                                                                                                                                    |                                                                             | 29          |                        | $\frac{nV}{\sqrt{Hz}}$ |
| THD       | Total Harmonic Distortion                                                                                                                                                                                                                                        |                                                                             | 0.05        |                        | %                      |


## PACKAGE MECHANICAL DATA

8 PINS - PLASTIC DIP

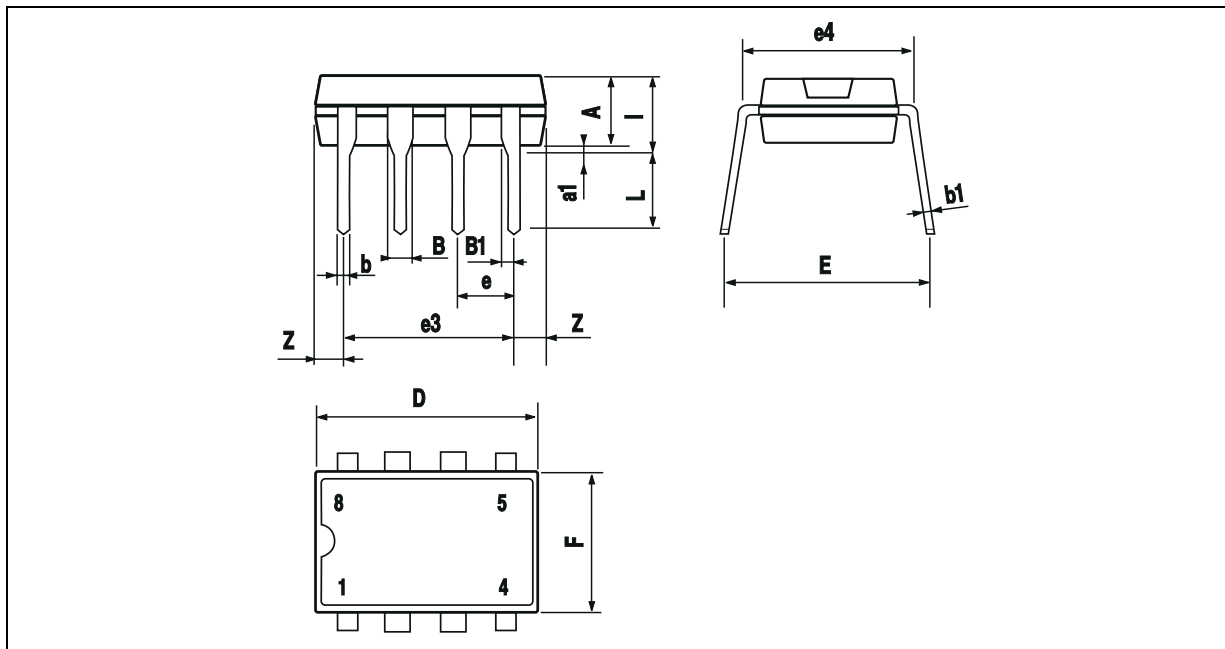

| Dimensions | Millimeters |      |       | Inches |       |       |
|------------|-------------|------|-------|--------|-------|-------|
|            | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A          |             | 3.32 |       |        | 0.131 |       |
| a1         | 0.51        |      |       | 0.020  |       |       |
| B          | 1.15        |      | 1.65  | 0.045  |       | 0.065 |
| b          | 0.356       |      | 0.55  | 0.014  |       | 0.022 |
| b1         | 0.204       |      | 0.304 | 0.008  |       | 0.012 |
| D          |             |      | 10.92 |        |       | 0.430 |
| E          | 7.95        |      | 9.75  | 0.313  |       | 0.384 |
| e          |             | 2.54 |       |        | 0.100 |       |
| e3         |             | 7.62 |       |        | 0.300 |       |
| e4         |             | 7.62 |       |        | 0.300 |       |
| F          |             |      | 6.6   |        |       | 0.260 |
| i          |             |      | 5.08  |        |       | 0.200 |
| L          | 3.18        |      | 3.81  | 0.125  |       | 0.150 |
| Z          |             |      | 1.52  |        |       | 0.060 |

PACKAGE MECHANICAL DATA  
8 PINS - PLASTIC MICROPACKAGE (SO)

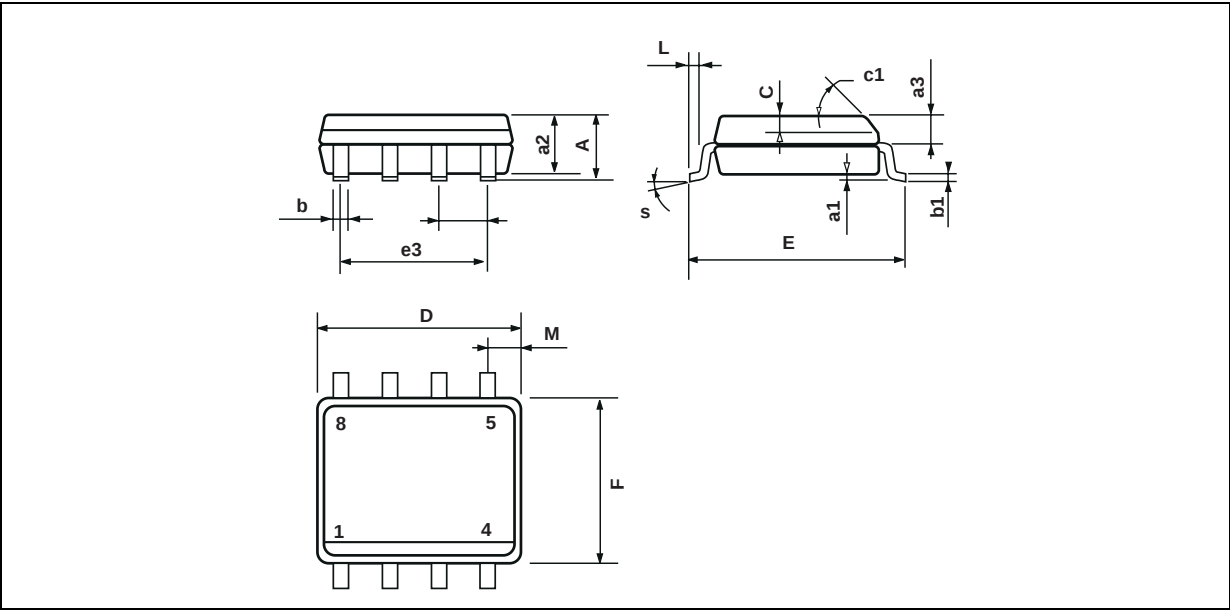

| Dimensions | Millimeters |      |      | Inches |       |       |
|------------|-------------|------|------|--------|-------|-------|
|            | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A          |             |      | 1.75 |        |       | 0.069 |
| a1         | 0.1         |      | 0.25 | 0.004  |       | 0.010 |
| a2         |             |      | 1.65 |        |       | 0.065 |
| a3         | 0.65        |      | 0.85 | 0.026  |       | 0.033 |
| b          | 0.35        |      | 0.48 | 0.014  |       | 0.019 |
| b1         | 0.19        |      | 0.25 | 0.007  |       | 0.010 |
| C          | 0.25        |      | 0.5  | 0.010  |       | 0.020 |
| c1         | 45° (typ.)  |      |      |        |       |       |
| D          | 4.8         |      | 5.0  | 0.189  |       | 0.197 |
| E          | 5.8         |      | 6.2  | 0.228  |       | 0.244 |
| e          |             | 1.27 |      |        | 0.050 |       |
| e3         |             | 3.81 |      |        | 0.150 |       |
| F          | 3.8         |      | 4.0  | 0.150  |       | 0.157 |
| L          | 0.4         |      | 1.27 | 0.016  |       | 0.050 |
| M          |             |      | 0.6  |        |       | 0.024 |
| S          | 8° (max.)   |      |      |        |       |       |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia  
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

© <http://www.st.com>





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.