

HIGH EFFICIENCY, HIGH DENSITY, DUAL-OUTPUT
(3.3V/5A and 2.5V/5A) REGULATOR

DESCRIPTION

Demonstration circuit 1586A is a high efficiency, dual-output (3.3V and 2.5V), synchronous buck converter with 4.5V to 25V input range. It can supply 5A maximum load current at 3.3V and 2.5V outputs. The demo board uses the LTC3855EUJ controller. The LTC3855 is a feature-rich dual-output dual-phase synchronous buck controller with on-chip drivers, remote output voltage sensing (V_{OUT2}) and inductor DCR temperature compensation. It is suitable for input from 4.5V to 38V and output up to 12.5V. The LTC3855 can provide high efficiency, high power density and versatile power solutions for telecom and datacom systems, industrial and medical instruments, DC power distribution systems and computer systems. The controller is available in 40-pin 6mm × 6mm QFN and 38-pin TSSOP packages.

The RUN pins (JP1 and JP4) provides enable feature. To shut down the converter, one simple way is to force the RUN pins below 1.2V (JP1: OFF; JP4: OFF). Use JP2 jumper to select burst mode, pulse skipping mode or forced continuous mode operation. The phase of CLKOUT is set by JP3. Switching frequency is pre-set at about 500kHz, and it can be easily modified from 250kHz to 770kHz. Please see LTC3855 datasheet for detailed information.

Design files for this circuit board are available. Call the LTC factory.

Table 1. Performance Summary (T_A = 25°C)

PARAMETER	CONDITION	VALUE
Input Voltage Range		4.5V to 25V
Output Voltage, V _{OUT1}	V _{IN} = 4.5-25V, I _{OUT1} = 0A to 5A	3.3V ±2%
Output Voltage, V _{OUT2}	V _{IN} = 4.5-25V, I _{OUT2} = 0A to 5A	2.5V ±2%
Maximum Output Current, I _{OUT1}	V _{IN} = 4.5-25V, V _{OUT1} = 3.3V	5A
Maximum Output Current, I _{OUT2}	V _{IN} = 4.5-25V, V _{OUT2} = 3.3V	5A
Typical Efficiency for V _{OUT1}	V _{IN} = 12V, V _{OUT1} = 3.3V, I _{OUT1} = 5A	92.1%
Typical Efficiency for V _{OUT2}	V _{IN} = 12V, V _{OUT2} = 2.5V, I _{OUT2} = 5A	90.3%
Typical Switching Frequency		500kHz

QUICK START PROCEDURE

Demonstration circuit 1586A is easy to set up to evaluate the performance of the LTC3855EUJ. Refer to Figure 1 for the proper measurement equipment setup and follow the procedure below:

1. With power off, connect the input power supply to Vin (4.5V-25V) and GND (input return).
2. Connect the 3.3V output load between Vout1 and GND (Initial load: no load).
3. Connect the 2.5V output load between Vout2 and GND (Initial load: no load).
4. Connect the DVMs to the input and outputs.
5. Turn on the input power supply and check for the proper output voltages. Vout1 should be 3.3V $\pm$ 2%. Vout2 should be 2.5V $\pm$ 2%.
6. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage and other parameters.

Note: When measuring the output or input voltage ripple, do not use the long ground lead on the oscilloscope probe. See Figure 2 for the proper scope probe technique. Short, stiff leads need to be soldered to the (+) and (-) terminals of an output capacitor. The probe's ground ring needs to touch the (-) lead and the probe tip needs to touch the (+) lead.

LTC3855EUJ

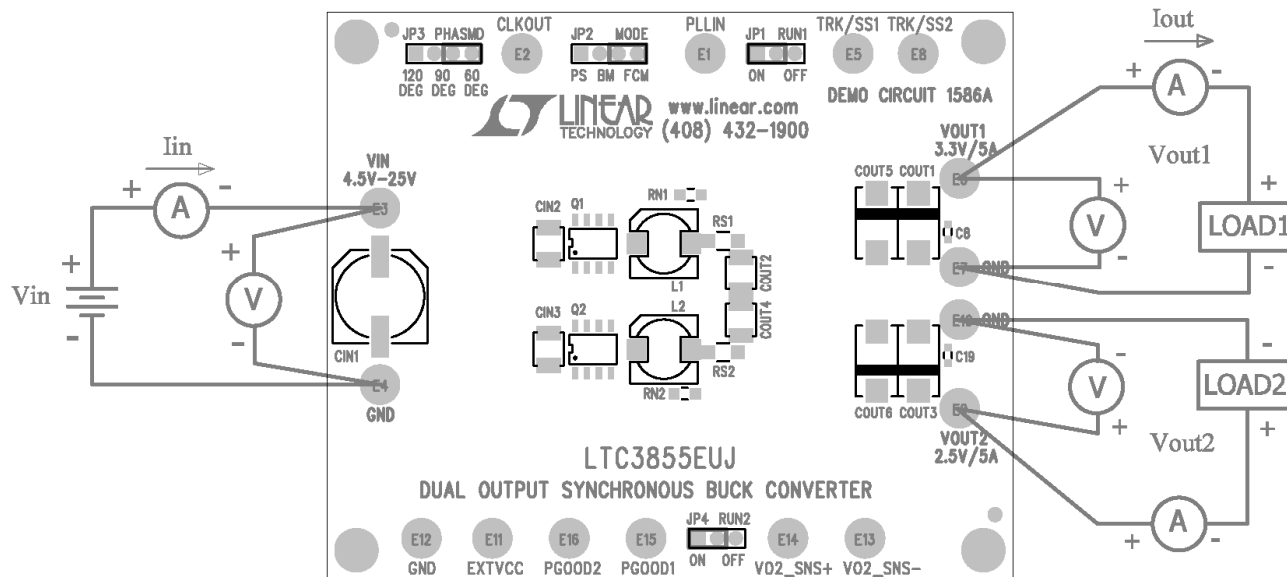


Figure 1. Proper Measurement Equipment Setup

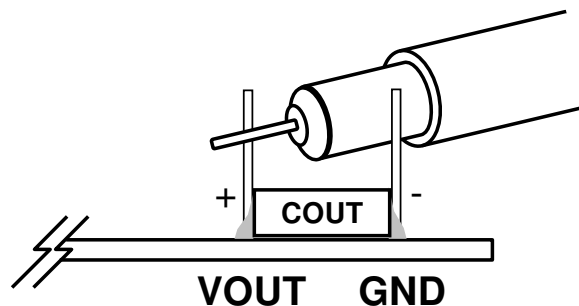


Figure 2. Measuring Output Voltage Ripple

EFFICIENCY VS. LOAD CURRENT

LTC3855_DC1586A_Rev.1

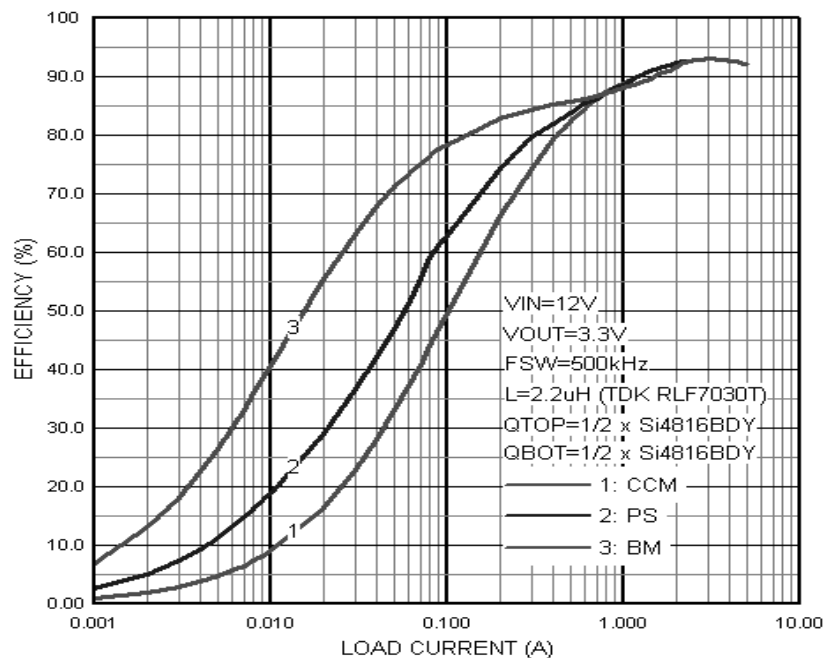


Figure 3. Efficiency vs load current For Vout1

EFFICIENCY vs. LOAD CURRENT

LTC3855_DC1586A




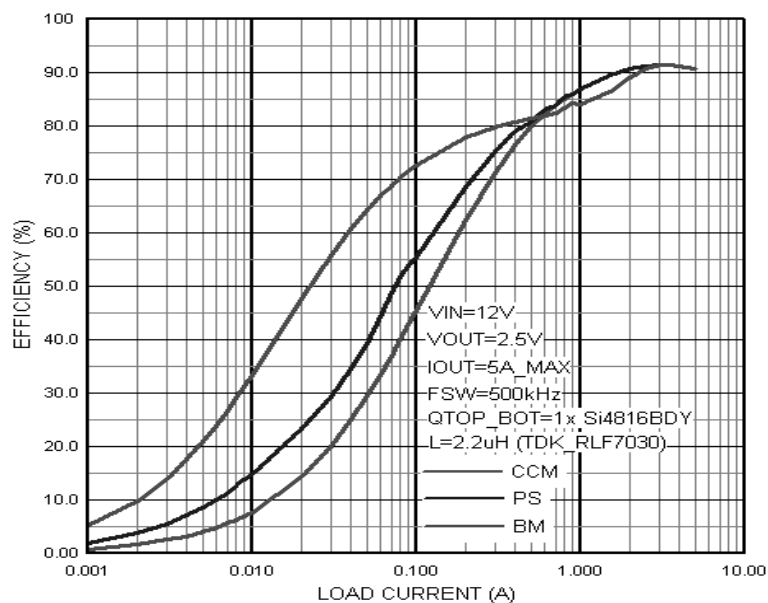


Figure 4. Efficiency vs load current For Vout2

LTC3855EUJ

REVISION HISTORY			
ECO	REV	DESCRIPTION	APPROVED DATE
	2	PRODUCTION	JAN/L 4-15-10

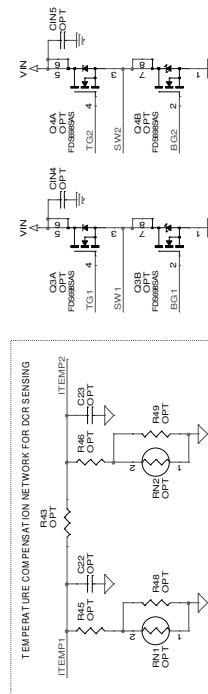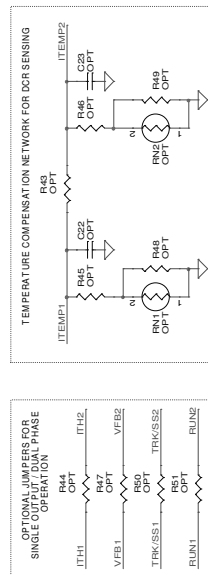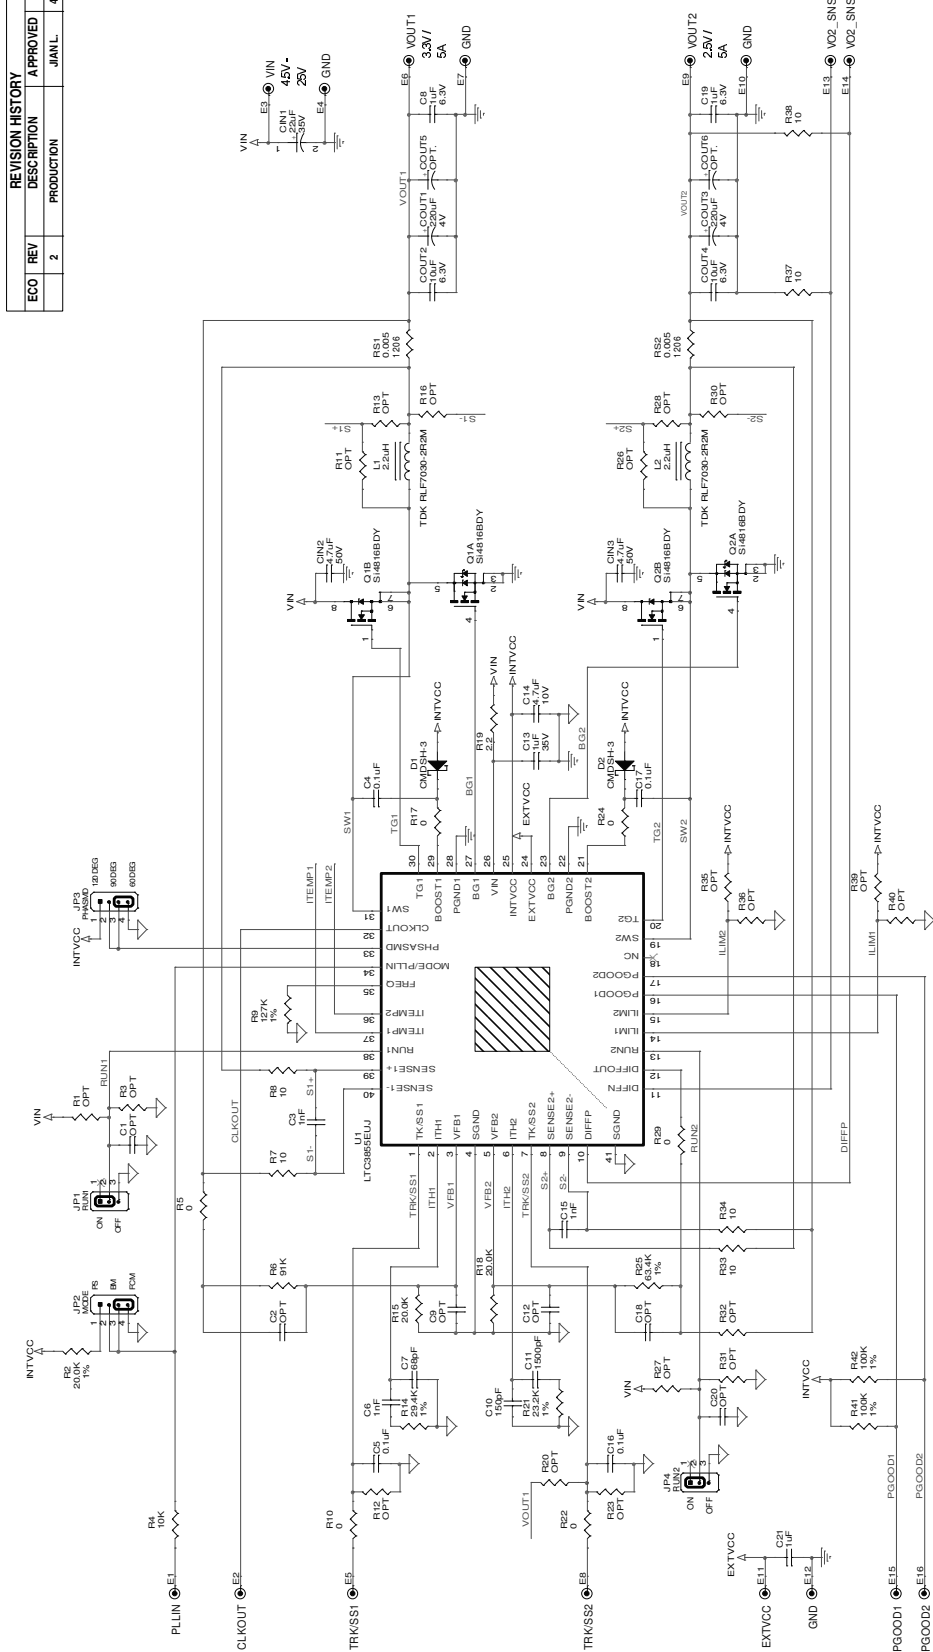

CUSTOMER NOTICE LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A CIRCUIT THAT MEETS CUSTOMER-SUPPLIED SPECIFICATIONS. HOWEVER, IT REMAINS THE CUSTOMER'S RESPONSIBILITY TO VERIFY PROPER AND RELIABLE OPERATION IN THE ACTUAL CIRCUIT. LOADS THAT MAY SIGNIFICANTLY AFFECT CIRCUIT PERFORMANCE OR RELIABILITY, CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING FOR ASSISTANCE. THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.		CONTRACT NO. APPROVALS POB DES. HZ	1891 MOCHA BLVD. MILPITAS, CA 95035 Phone: (408) 321-9900 Fax: (408) 321-0077 LTC Confidential-For Customer Use Only
TITLE: SCHEMATIC DUAL OUTPUT SYNCHRONOUS BUCK CONVERTER		DATE: Tuesday, January 17, 2012	REV 2
SIZE A		IC NO. LTC3855EUJ	SHEET 1 OF 1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.