


## Applications

- General purpose RF filter/wireless
- Wireless infrastructure
- 4G, Multi-standard
- Band 25 Uplink


## Product Features

- Usable bandwidth 65 MHz
- High Attenuation
- Low Loss
- Single-ended operation
- Matching required for operation at 50 Ω
- Small size; 3.00 x 3.00 x 1.22 mm
- Ceramic Surface Mount Package (SMP)
- Hermetically sealed
- RoHS compliant, Pb-free 

## General Description

885048 is a general purpose Uplink filter for Band 25. This filter was specifically designed in a 3x3mm hermetic package for Base Station applications and is part of our wide portfolio of RF filters in the same package.


Low insertion loss, coupled with high attenuation and excellent power handling, makes this filter a natural choice for our customers Uplink RF filtering needs and other general purpose applications

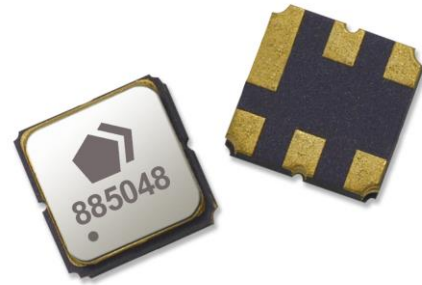

SMP-12A - 3.00 x 3.00 x 1.22 mm

## Functional Block Diagram

Top View

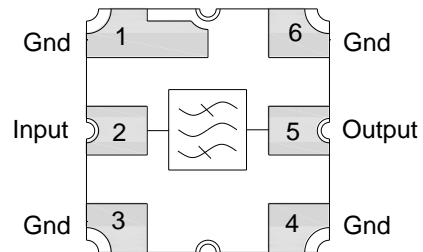

## Pin Configuration

Pin No.	Label
2	Input
5	Output
1,3,4,6	Case Ground

## Ordering Information

Part No.	Description
885048	Packaged part
885048-EVB	Evaluation board

Standard T/R size = 5,000 units/reel

## Absolute Maximum Ratings

Parameter	Rating
Storage Temperature <sup>(1)</sup>	- 40 to + 85 ° C
Operable Temperature <sup>(1)(2)(3)</sup>	- 30 to + 105 ° C
RF Input Power <sup>(1)</sup>	<sup>(2)</sup> +30 dBm
RF Input Power <sup>(1)</sup>	<sup>(3)</sup> +22 dBm

1. Operation of this device outside the parameter ranges given may cause permanent damage
2. Input Power with applied CW signal at +95°C for 1000 hours
3. Input Power with applied CW signal at +105°C for 24 hours

## Electrical Specifications <sup>(1)</sup>



Conditions unless otherwise noted: Device Temperature = - 30° C to + 85° C.

Parameter <sup>(2)</sup>	Conditions	Min	Typ <sup>(3)</sup>	Max	Units
Center Frequency		-	1882.5	-	dB
Maximum Insertion Loss	1850 – 1915 MHz	-	2.5	3.0	dB
	1850 – 1915 MHz at +105°C <sup>(7)</sup>	-	2.5	3.6	
Amplitude Variation <sup>(4)</sup>	1850 – 1915 MHz	-	1.3	2.0	dB p-p
	1850 – 1915 MHz at +105°C <sup>(7)</sup>	-	1.3	2.1	
Amplitude Variation (any 3.84 MHz in passband) <sup>(4)</sup>	1850 – 1915 MHz	-	0.7	1.0	dB p-p
	1850 – 1915 MHz at +105°C <sup>(7)</sup>	-	0.7	1.1	
Absolute Attenuation <sup>(5)</sup>	10 – 450 MHz	40	51	-	dB
	450 – 1470 MHz	30	38	-	
	1470 – 1560 MHz	36.5	42	-	
	1470 – 1560 MHz at +105°C <sup>(7)</sup>	36.5	42	-	
	1560 – 1670 MHz	39	46	-	
	1670 – 1774 MHz	30	35	-	
	1774 – 1815 MHz	25	32	-	
	1815 – 1830 MHz	29	35	-	
	1830 – 1831.4 MHz	21	27	-	
	1930 – 1931.5 MHz	15	38	-	
	1931.5 – 1970 MHz	21	42	-	
	1970 – 1995 MHz	40	52	-	
	1995 – 2300 MHz	35	41	-	
	2300 – 2410 MHz	30	38	-	
2410 – 3840 MHz	20	25	-		
3840 – 4000 MHz	20	24	-		
Input VSWR	1850 – 1915 MHz	-	2.1:1	2.5:1	-
	1850 – 1915 MHz at +105°C <sup>(7)</sup>	-	2.1:1	2.7:1	
Output VSWR	1850 – 1915 MHz	-	2.1:1	2.5:1	-
	1850 – 1915 MHz at +105°C <sup>(7)</sup>	-	2.1:1	2.6:1	
Source / Load Impedance <sup>(6)</sup>		-	50	-	Ω

### Notes:

1. All specifications are based on the TriQuint schematic shown on page 3
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Typical values are based on average measurements at room temperature
4. Describes the total variation over the defined frequency range
5. Relative zero dB
6. This is the optimum impedance in order to achieve the performance shown
7. Extended temperature operation: the filter can be operated up to +105°C with de-rated specification as noted.

## Evaluation Board

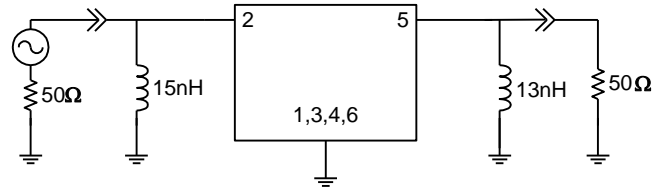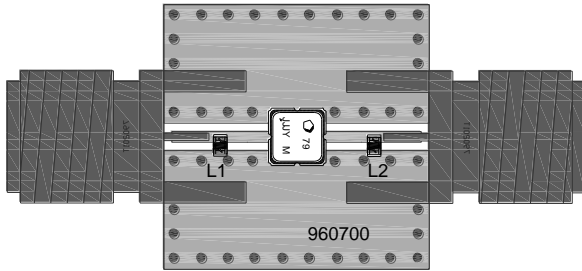


**Notes:**

1. Matching component values shown are for the specified TriQuint evaluation board. Value adjustment may be required in end user product circuits depending on component manufacturer and PCB material.
2. PCB: Construction Top, middle & bottom layers: 1 oz copper; Substrates: FR4 dielectric, .031" thick; Finish plating: Nickel: 3-8µm thick, Gold: .03-.2µm thick; Hole plating: Copper min .0008µm thick

## Bill of Material

Reference Des.	Value	Description	Manuf.	Part Number
L1	15 nH	Coil Wire-wound, 0402, 5%	Murata	LQW15AN15NJ00
L2	13 nH	Coil Wire-wound, 0402, 5%	Murata	LQW15AN13NJ00
SMA	N/A	SMA connector	Radiall USA	9602-1111-018
PCB	N/A	3-layer	Multiple	960700

## PCB Mounting Pattern







**Notes:**


1. All dimensions are in millimeters. Angles are in degrees.
2. This drawing specifies the mounting pattern used on the TriQuint evaluation board for this product. Some modification may be necessary to suit end user assembly materials and processes.

**Performance Plots**


Test conditions unless otherwise noted: Temp= +25° C

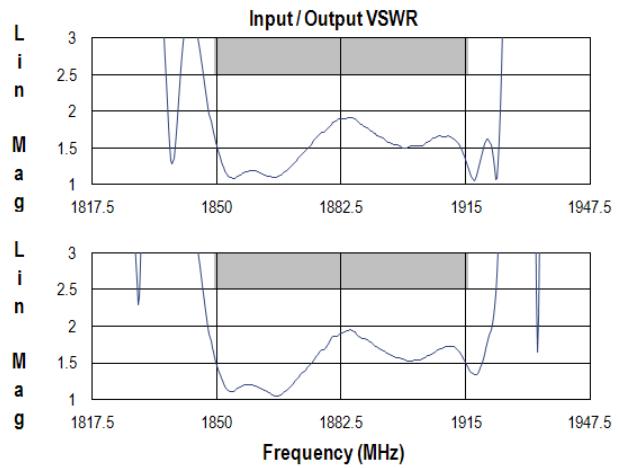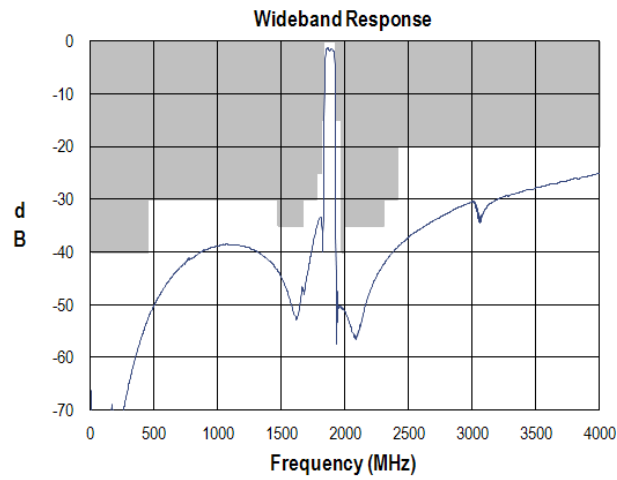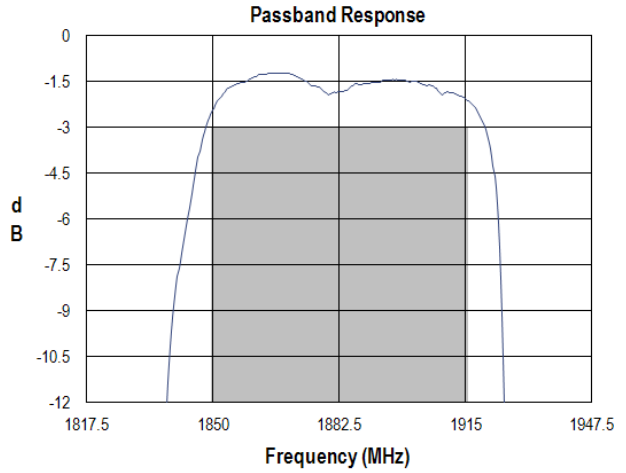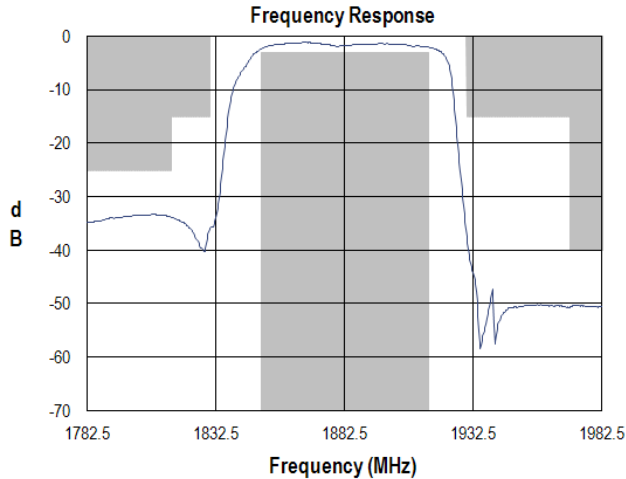


**Input Smith Chart**

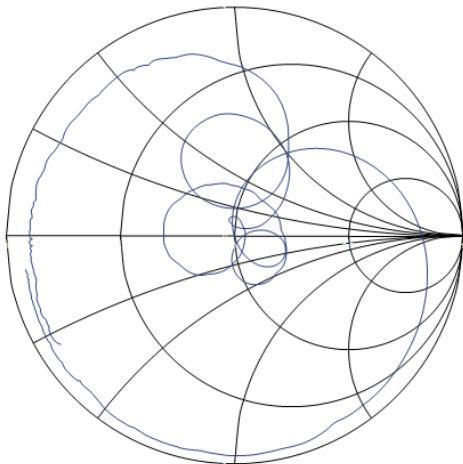

**Output Smith Chart**

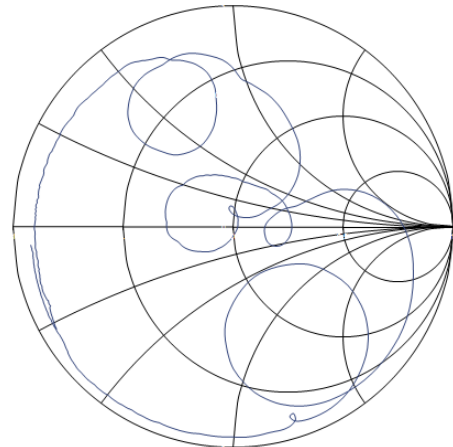

## Package Information, Marking and Dimensions

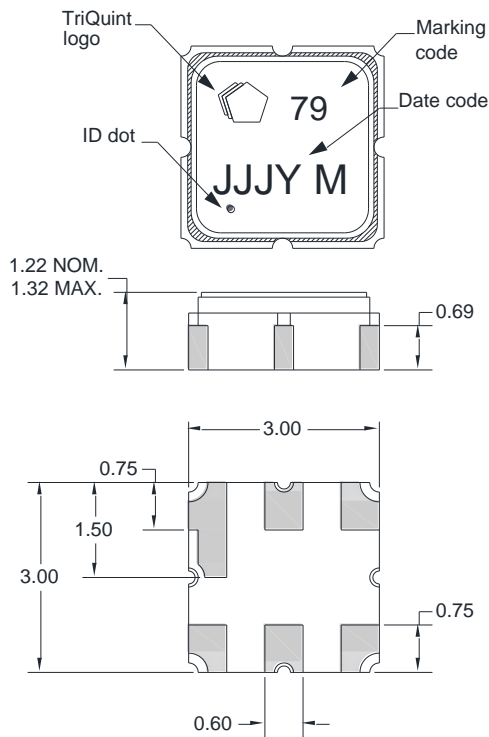

Package Style: SMP-12A  
Dimensions: 3.00 x 3.00 x 1.22 mm

Body:  $Al_2O_3$  ceramic  
Lid: Kovar, Ni plated  
Terminations: Au plating 0.5 - 1.0 $\mu$ m, over a 2-6 $\mu$ m Ni plating


All dimensions shown are nominal in millimeters  
All tolerances are  $\pm 0.15$ mm except overall length and width  $\pm 0.10$ mm

The date code consists of day of the current year (Julian, 3 digits), Y = last digit of the year, and M = manufacturing site code

Notes:

1. All dimensions shown are typical in millimeters
2. An asterisk (\*) in front of the marking code indicates prototype.

## Tape and Reel information

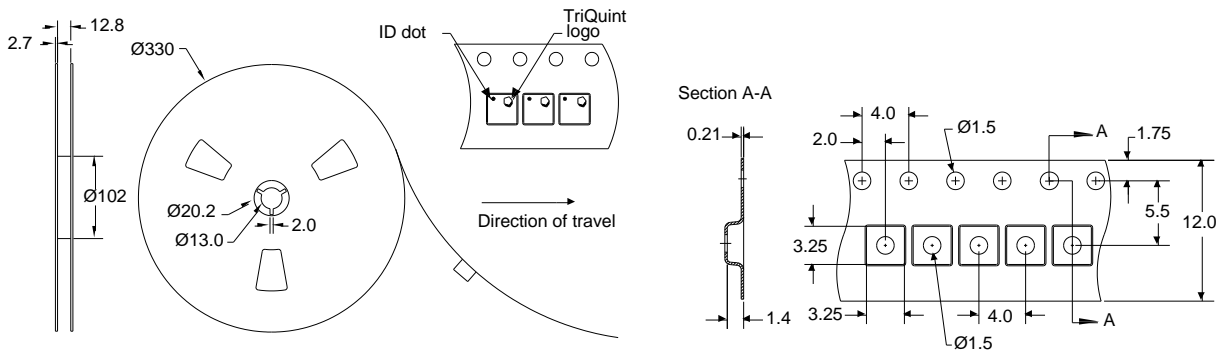

Standard T/R size = 5,000 units/reel. All dimensions are in millimeters.

## Product Compliance Information

### ESD Sensitivity Ratings



Caution! ESD-Sensitive Device

ESD Class: TBD  
Test: Human Body Model (HBM)  
Standard: JEDEC JS-001

ESD Class: TBD  
Test: Charge Device Model (CDM)  
Standard: JEDEC JES-002

### Solderability

Compatible with both lead-free (260°C maximum reflow temperature) and tin/lead (245°C maximum reflow temperature) soldering processes.

Refer to [Soldering Profile](#) for recommended guidelines.

### RoHS Compliance

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Lead

## Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

**Web:** [www.triquint.com](http://www.triquint.com) **Tel:** 877-800-8584  
**Email:** [customer.support@qorvo.com](mailto:customer.support@qorvo.com)

For information about the merger of RFMD and TriQuint as Qorvo:

**Web:** [www.qorvo.com](http://www.qorvo.com)

For technical questions and application information: **Email:** [flapplication.engineering@tqs.com](mailto:flapplication.engineering@tqs.com)

## Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.