



## FEATURES

- IEC60601 Ed 3 medical (2 X MOPP Pri-Sec)  
EN60950 ITE safety approved
- 400W compact high density
- 3" x 5" standard footprint
- High efficiency up to 94%
- Remote sense
- Remote On/Off, Power OK
- Universal AC input with active PFC
- Less than 1U high – 1.4"
- Convection cooled operation up to 250W
- Isolated 12V@1A fan output
- Isolated 5V@2A standby output
- RoHS compliant
- Active inrush protection
- Current sharing option

## DESCRIPTION

The MVAC400 series switching power supplies utilize advanced component and circuit technologies to deliver high efficiency. Designed for medical, computing, communications, telecom and other OEM applications to satisfy 1U height design considerations, the MVAC400 Series measures only 3.0" x 5.0" x 1.40". All models offer universal AC input with active power factor correction (PFC) and compliance to worldwide safety and EMC standards.



Available now at  
[www.murata-ps.com/en/3d/acdc.html](http://www.murata-ps.com/en/3d/acdc.html)



# MVAC400 Series

## 400W 3" x 5" High Density AC-DC Power Supply Converter

### ORDERING GUIDE

| Model Number   | Natural Convection Cooling                                         | Forced Air Cooling | Main Output (V1) | Fan Output (V2) | Aux Output (V3) |
|----------------|--------------------------------------------------------------------|--------------------|------------------|-----------------|-----------------|
| MVAC400-12AF   | 250W                                                               | 400W @ 250LFM      | 12V              | 12V             | 5V              |
| MVAC400-24AF   |                                                                    |                    | 24V              |                 |                 |
| MVAC400-48AF   |                                                                    |                    | 50V              |                 |                 |
| MVAC400-12AFD  |                                                                    |                    | 12V              |                 |                 |
| MVAC400-24AFD  |                                                                    |                    | 24V              |                 |                 |
| MVAC400-48AFD  |                                                                    |                    | 50V              |                 |                 |
| MVAC400-24AFT* |                                                                    |                    | 24V              |                 |                 |
| MVAC400-12AFR* |                                                                    |                    | 12V              |                 |                 |
| MVAC400-12AFT* |                                                                    |                    | 12V              |                 |                 |
| MVAC-COVER     | Optional cover kit assembly; see MVAC-COVER datasheet for details. |                    |                  |                 |                 |

Refer to page 2 for current sharing details for MVAC400-xxAFD and MVAC400-xxAFR models.

\* CCC Certification is not available for these models.

### INPUT CHARACTERISTICS

| Parameter                        | Conditions                         | Min. | Typ.    | Max. | Units |
|----------------------------------|------------------------------------|------|---------|------|-------|
| Input Voltage Operating Range    | Single phase                       | 90   | 115/230 | 264  | Vac   |
|                                  | DC                                 | 127  |         | 300  | Vdc   |
| Input Frequency                  |                                    | 47   | 50/60   | 63   | Hz    |
| Turn-on Input Voltage            | Input rising                       | 80   |         | 90   | Vac   |
| Turn-off Input Voltage           | Input falling                      | 70   |         | 80   |       |
| Input Current                    | 90Vac input, full load all outputs |      |         | 5.5  | A     |
| No Load Input Power <sup>7</sup> | (PS_ON = OFF, 5V_Aux = 0A)         | 1.5  |         | 2.0  | W     |
| Inrush Current                   | At 264Vac, at 25°C cold start      |      | 15      |      | Apk   |
| Power Factor                     | At 230Vac, full load               |      | 0.98    |      |       |

### OUTPUT CHARACTERISTICS

| Model Number  | Main Output Voltage (V1) | Load Current | Maximum Load Capacitance | Line, Load, Cross Regulation <sup>6</sup> | Typical Efficiency @230Vac |
|---------------|--------------------------|--------------|--------------------------|-------------------------------------------|----------------------------|
| MVAC400-12AFx | 12V                      | 0 to 33.3A   | 0 to 2200μF              | ± 1%                                      | 93%                        |
| MVAC400-24AFx | 24V                      | 0 to 16.7A   | 0 to 470μF               | ± 1%                                      | 93%                        |
| MVAC400-48AFx | 50V                      | 0 to 8.0A    | 0 to 150μF               | ± 1%                                      | 94%                        |

### MAIN OUTPUT CHARACTERISTICS (ALL MODELS)

| Parameter                           | Conditions                                                                                                                   | Typ. | Max. | Units |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------|------|------|-------|
| Transient Response <sup>9</sup>     | 50% load step, 1A/μsec slew rate                                                                                             |      | ± 5  | %     |
| Settling Time to 1% of Nominal      |                                                                                                                              |      | 500  | μsec  |
| Turn On Delay                       | After application of input power                                                                                             |      | 3    | sec   |
| Output Voltage Rise                 | Monotonic <sup>5</sup>                                                                                                       |      | 50   | msec  |
| Output Holdup                       | 120Vac/60Hz, full load                                                                                                       | 20   |      |       |
| Temperature Coefficient             |                                                                                                                              |      | 0.02 | %/°C  |
| Ripple Voltage & Noise <sup>1</sup> |                                                                                                                              |      | 1    | %     |
| Remote Sense                        | Compensates for up to 0.5V of lead drop with remote sense connected. Protected against short circuit and reverse connection. |      | 500  | mV    |
| Hot Swap Transients <sup>10</sup>   | All outputs remain in regulation                                                                                             |      | ± 10 | %     |

### AUXILIARY OUTPUT CHARACTERISTICS (ALL MODELS)

| Auxiliary Output | Aux Output Voltage <sup>8</sup> | Load Current | Load Capacitance | Line, Load, Cross Regulation <sup>3</sup> | Ripple Voltage & Noise <sup>1</sup> |
|------------------|---------------------------------|--------------|------------------|-------------------------------------------|-------------------------------------|
| Fan (V2)         | 12V                             | 0 to 1A      | 0 to 220μF       | ± 10%                                     | 2%                                  |
| Aux (V3)         | 5V                              | 0 to 2A      | 0 to 220μF       | ± 5%                                      | 1%                                  |

### ENVIRONMENTAL CHARACTERISTICS

| Parameter                                                  | Conditions                                                                                                                                                                                     | Min.                             | Typ. | Max. | Units |
|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|------|------|-------|
| Storage Temperature Range                                  |                                                                                                                                                                                                | -40                              |      | 85   | °C    |
| Operating Temperature Range                                | See power rating curves                                                                                                                                                                        | -10                              |      | 70   |       |
|                                                            | Start up                                                                                                                                                                                       | -20                              |      |      |       |
| Operating Humidity                                         | Non-condensing                                                                                                                                                                                 | 10                               |      | 95   | %     |
| Operating Altitude                                         |                                                                                                                                                                                                | -200                             |      | 5000 | m     |
| MTBF                                                       | Telcordia SR-332 M1C3 @25°C                                                                                                                                                                    | 474K                             |      |      | Hours |
| Shock                                                      | Operating, MIL-HBK-810E                                                                                                                                                                        | Complies                         |      |      |       |
|                                                            | Non-operating, MIL-HBK-810E                                                                                                                                                                    | Complies                         |      |      |       |
| Operational Vibration                                      | IEC-68-2-27 standard                                                                                                                                                                           | Complies to levels of IEC721-3-2 |      |      |       |
| Safety – Medical Standards<br>2 x MOPP (Primary-Secondary) | IEC60601-1 (Ed. 3) – CB Cert and Report<br>ANSI/AAMI ES60601-1 (2005+C1:09+A2:10)<br>CAN/CSA 22.2 No. 60601-1 (2008) 3rd Edition<br>EN60601-1:2006+CORR:2010                                   |                                  |      |      |       |
| Safety – ITE Standards                                     | UL60950-1, 2nd Edition, 2011-12-19<br>CSA22.2 No.60950-1-07, 2nd Edition, 2001-12.<br>EN60950-1:2006+A11:2009/A1/2010/A12:2011<br>IEC 60950 (ed.2), IEC60950 (ed.2); am1<br>CE Marking per LVD |                                  |      |      |       |
| Warranty                                                   | 2 years                                                                                                                                                                                        |                                  |      |      |       |
| Outside Dimensions                                         | 3.0" x 5.0" x 1.4" (76.2mm x 127mm x 35.6mm)                                                                                                                                                   |                                  |      |      |       |
| Weight (typ.)                                              | 0.8lbs (362.87g)                                                                                                                                                                               |                                  |      |      |       |

### RESIDUAL RISK (PER ISO 14971 & IEC60601-1) FOR USER CONSIDERATION

| Fault Condition | Residual Risk                               |
|-----------------|---------------------------------------------|
| Complies        | Contact your Murata salesperson for details |

### PROTECTION CHARACTERISTICS

| Parameter                                  | Conditions                | Min. | Typ.     | Max. | Units |
|--------------------------------------------|---------------------------|------|----------|------|-------|
| Over Voltage Protection <sup>4</sup>       | V1 (main output) latching | 110  |          | 125  | %     |
|                                            | V3 (aux output) latching  | 5.5  |          | 7.5  | V     |
| Over Current Protection <sup>4</sup>       | V1, hiccup mode           | 110  |          | 130  | %Amax |
|                                            | V3, auto-recovery         | 110  |          | 150  |       |
| Over Temperature Protection                | Auto-recovery             |      | Complies |      |       |
| Remote Sense Short Circuit Protection      |                           |      | Complies |      |       |
| Remote Sense Reverse Connection Protection |                           |      | Complies |      |       |

### ISOLATION CHARACTERISTICS

| Parameter                                            | Conditions                    | Min. | Typ. | Max. | Units |
|------------------------------------------------------|-------------------------------|------|------|------|-------|
| Isolation                                            | Primary to Chassis            | 1500 |      |      | Vac   |
|                                                      | Primary to Secondary (2xMOPP) | 4000 |      |      |       |
|                                                      | Secondary to Chassis          | 500  |      |      |       |
|                                                      | Output to Output              | 500  |      |      |       |
| Earth Leakage Current (under single fault condition) | 264Vac, 60Hz, 25°C            |      | 300  |      | µA    |
| Earth Leakage Current (under normal conditions)      | 264Vac, 60Hz, 25°C            |      | 150  |      | µA    |

### CURRENT SHARING OPTION – MVAC400-xxAFD AND MVAC400-xxAFR

| Model Number                                                     | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MVAC400-12AFD<br>MVAC400-24AFD<br>MVAC400-48AFD<br>MVAC400-12AFR | <p>Main Output: Current share is achieved using the droop method. Nominal output voltage is achieved at 50% load and output voltage increases/drops at a rate of:</p> <ul style="list-style-type: none"> <li>30mV per amp for the 12V output</li> <li>120mV per amp for the 24V output</li> <li>500mV per amp for the 50V output.</li> </ul> <p>Startup of parallel power supplies is not internally synchronized. If more than 400W combined power is needed, start-up synchronization must be provided by using a common PS_ON signal. To account for ±10% full load current sharing accuracy and the reduction in full load output voltage due to droop, available output power must be derated by 15% when units are operated in parallel. Current sharing can be achieved with or without remote sense connected to the common load.</p> <p>If ORing protection is desired, use the AFR model or if the AFD model is selected please contact Murata sales for external ORing FET board or external ORing FET reference circuit design (also see Applications Note ACAN-42).</p> <p>Aux (V3) output can be tied together for redundancy but total combined output power must not exceed 10W, external ORing devices must be used.</p> <p>Fan (V2) can be tied together for redundancy but total com load must not exceed 12W, external ORing devices must be used.</p> |

### EMISSIONS AND IMMUNITY

| Characteristic                     | Standard          | Compliance                  |
|------------------------------------|-------------------|-----------------------------|
| Input Current Harmonics            | IEC/EN 61000-3-2  | Class A                     |
| Voltage Fluctuation and Flicker    | IEC/EN 61000-3-3  | Complies                    |
| Conducted Emissions                | EN 55022          | Class B                     |
|                                    | FCC Part 15       | Class B                     |
| ESD Immunity                       | IEC/EN 61000-4-2  | Level 4, Criterion 2        |
| Radiated Field Immunity            | IEC/EN 61000-4-3  | Level 3, Criterion A        |
| Electrical Fast Transient Immunity | IEC/EN 61000-4-4  | Level 4, Criterion A        |
| Surge Immunity                     | IEC/EN 61000-4-5  | Level 3, Criterion A        |
| Radiated Field Conducted Immunity  | IEC/EN 61000-4-6  | Level 3, 10V/m, Criterion A |
| Magnetic Field Immunity            | IEC/EN 61000-4-8  | Level 3, Criterion A        |
| Voltage dips, interruptions        | IEC/EN 61000-4-11 | Level 3, Criterion B        |

### EMI CONSIDERATIONS

For optimum EMI performance, the power supply should be mounted to a metal plate grounded to all 4 mounting holes of the power supply. To comply with safety standards, this plate must be properly grounded to protective earth (see mechanical dimension notes). Pre-compliance testing has shown the stand-alone power supply to comply with EN55022 class A radiated emissions. Class B radiated emissions are achievable with a metal enclosure. Radiated emission results vary with system enclosure and cable routing paths.

### SAFETY CONSIDERATIONS




1. This power supply is a component level power supply intended for use in Class I or Class II applications. Secondary ground traces need to be suitably isolated from primary ground traces when used in Class II applications.
2. When the power supply is used in Class II equipment, all ground traces and components connected to the primary side are considered primary for spacing and insulation considerations.

### STATUS AND CONTROL SIGNALS

| Parameter | Models                                         | Conditions                                                                                                                                                                                                                                                                                                |
|-----------|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PS_ON     | MVAC400-xxAF<br>MVAC400-xxAFD<br>MVAC400-xxAFR | This pin must be pulled low (sink current >2mA) to +5V_AUX_RTN to turn on the main and Fan (V2) output. The +5V_AUX output is independent of the PS_ON signal, and comes up automatically when the input AC or input DC voltage is applied within their specified operating ranges.                       |
|           | MVAC400-xxAFT                                  | This pin is pulled high internally and so all three outputs (main, Fan output and +5V_AUX) come up automatically when the input AC or input DC voltage is applied within their specified operating ranges. Pulling this pin low (sink current >2mA) to +5V_AUX_RTN will disable the main and fan outputs. |
| PWR_OK    | All Models                                     | Open collector logic goes high 50-200ms after the main output is within regulation; it goes low at least 6msecs before loss of regulation. Internal 10K pull up to +5V_Aux is provided. Applications using the PWR_OK signal should maintain a minimum load of 5W on the main or fan output.              |


1. Noise and ripple is measured at an oscilloscope jack on the output, 20MHz bandwidth, and with 0.1μF ceramic and 10μF aluminum electrolytic capacitors across the output pins.
2. Unless otherwise specified all measurements are taken at 120Vac input and 25°C ambient temperature.
3. Fan (V2) regulation band applies from 0.1A to 1A load with a minimum of 10W load on the main (V1) output.
4. Fan (V2) has overvoltage protection (tracking V1) and short circuit protection. Overloading the Fan (V2) output can result in permanent damage to the unit.
5. 24V and 50V models may exhibit up to 5% turn on overshoot for loads less than 4% of full load.
6. Load regulation for droop version models (MVAC400-xxAFD and MVAC400-xxAFR) is based the calculated droop voltage ±1.5% (see current sharing section for droop characteristics).
7. No load Input power varies by model and by input line. Measurement is difficult to make due to burst mode operation. Please contact Murata sales if additional information is required.
8. All three output returns are isolated from each other (see isolation characteristics section); the returns may be tied together externally.
9. Load steps beginning from combined loads on the main and fan outputs of less than 5W may result in transient undershoots outside of the spec limits.
10. For MVAC400-xxAFR models only: Measured with 220μF capacitance across main output.

### PART NUMBER STRUCTURE

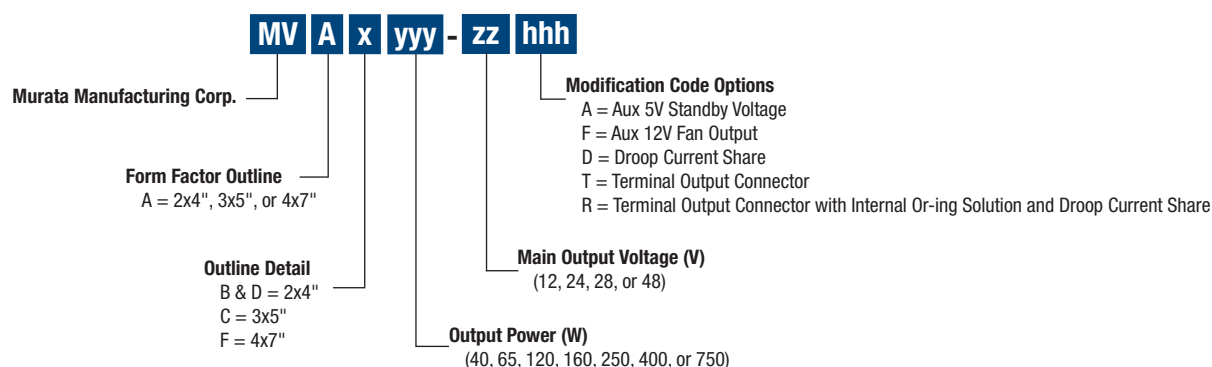


## PERFORMANCE DATA


MVAC400-12 Efficiency (including 5V Aux Output)

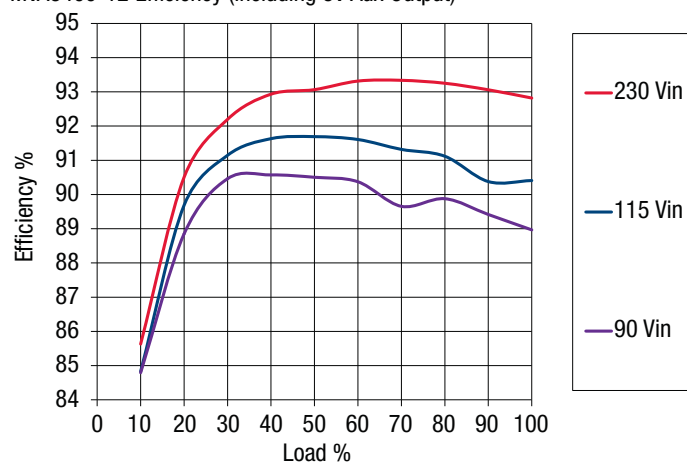

MVAC400-24 Efficiency (including 5V Aux Output)

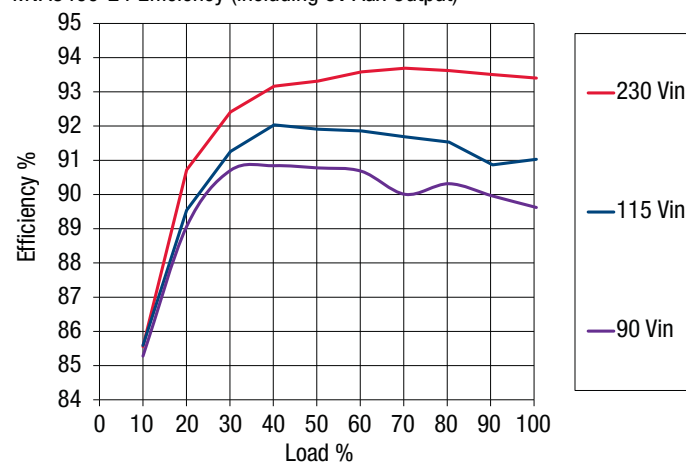

MVAC400-48 Efficiency (including 5V Aux Output)

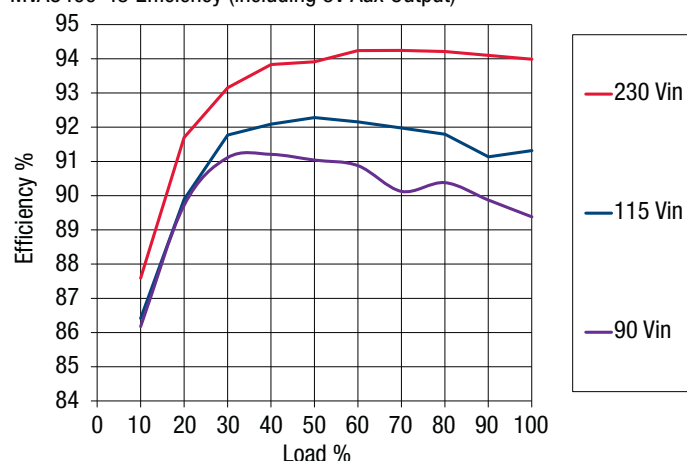

Inrush Current





Time: 100 mSec/Div, Ch1: 500 V/Div, Ch4: 20 A/Div, Vin: 264 VAC, I<sub>pk</sub> = 15.1 A  
AC applied at peak of sine wave

### THERMAL CONSIDERATIONS


System thermal management is critical to the performance and reliability of the MVAC series power supplies. Performance derating curves are provided which can be used as a guideline for what can be achieved in a system configuration with controlled airflow at various input voltage conditions.

The air flow curves are generated using an AMCA 210-99 and ASHRAE 51-1999 compliant wind tunnel with heated inlet air and a controlled CFM providing a duct test section having a calculated average LFM. A correlation between the test setup and the actual system environment is paramount to understanding what can be achieved in an actual system. In a power supply of this density, cooling air moving both through the unit as well as around the unit strongly influences local temperatures. The wind tunnel test setup was constructed to produce a flow with a slight back pressure to induce both flow conditions by providing a small gap between the power supply and duct walls of 0.5" (13mm). The optimal and characterized airflow direction is from the input connector to the output connector (see diagram below). The P-Q flow curve for this test setup is also shown below.

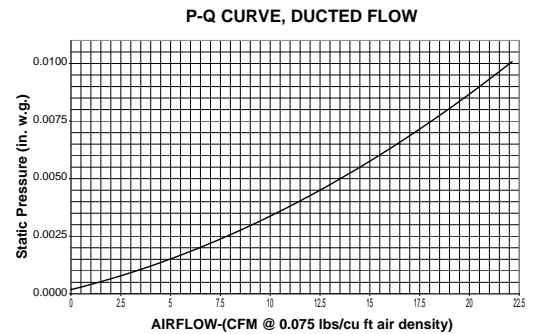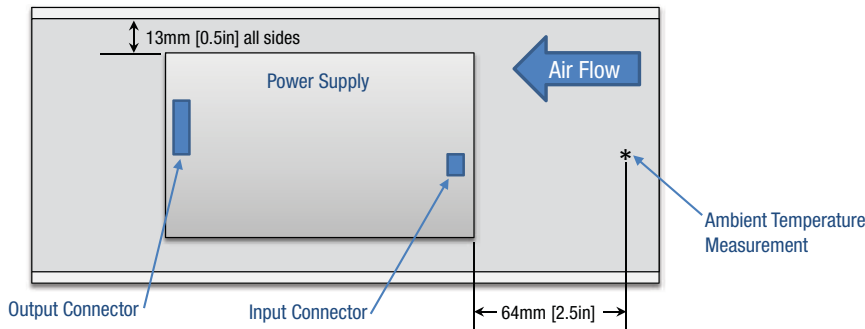


The natural convection data is obtained from a horizontally mounted power supply with un-obstructed flow at room temperature. At elevated temperature the power supply data is taken while it is surrounded by a large vented enclosure to minimize forced cross flows inherent in the elevated temperature test system.


**Power Rating at 230Vac**

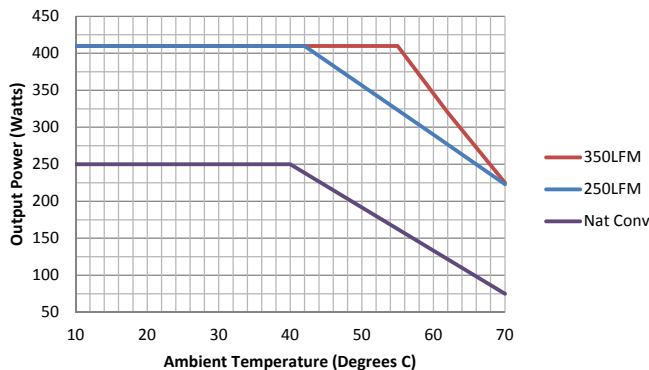


**Power Rating at 120Vac**

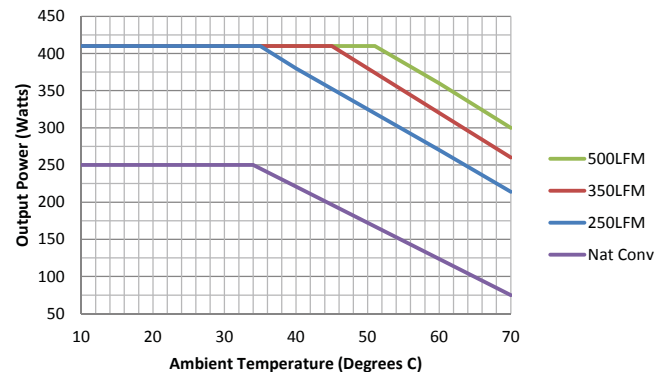


**Power Rating at 100Vac**

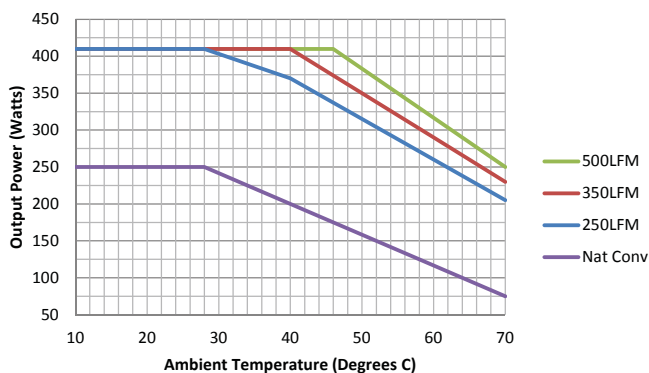

**Power Rating at 90Vac**

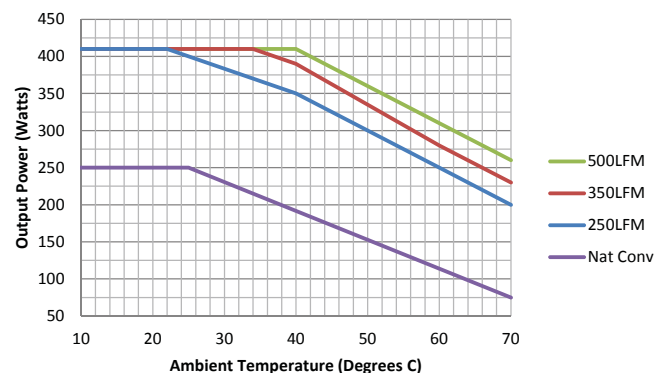

### WIRING DIAGRAM FOR OUTPUT

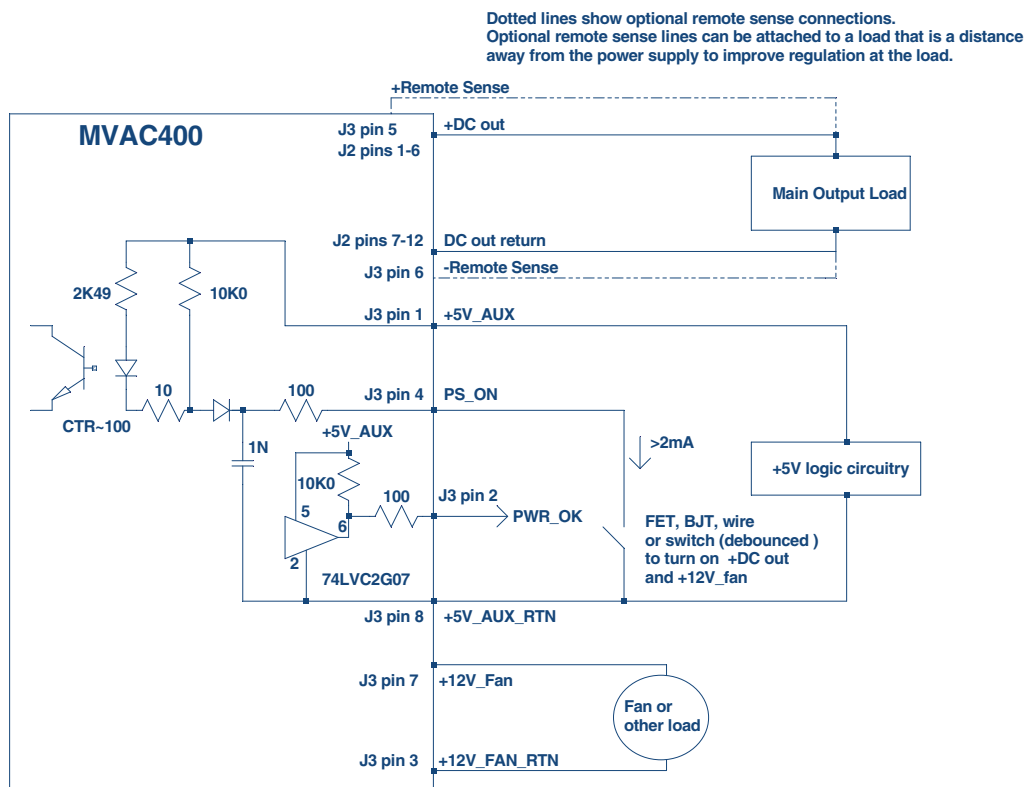


Note: For parallel (current share) operation it is required to connect the sharing power supplies in parallel (+DC out connected together and DC out Return connected together on sharing power supplies. Since each output has an identical "droop" share characteristic then each output will intrinsically share the total load current.

### APPLICATION NOTE

| Document Number     | Description                          | Link                                                                                                       |
|---------------------|--------------------------------------|------------------------------------------------------------------------------------------------------------|
| ACAN-42 MVAC Series | External ORing FET Reference Circuit | <a href="http://www.murata-ps.com/data/apnotes/acan-42.pdf">www.murata-ps.com/data/apnotes/acan-42.pdf</a> |

### MECHANICAL DIMENSIONS – MVAC400-xxAF and MVAC400-xxAFD

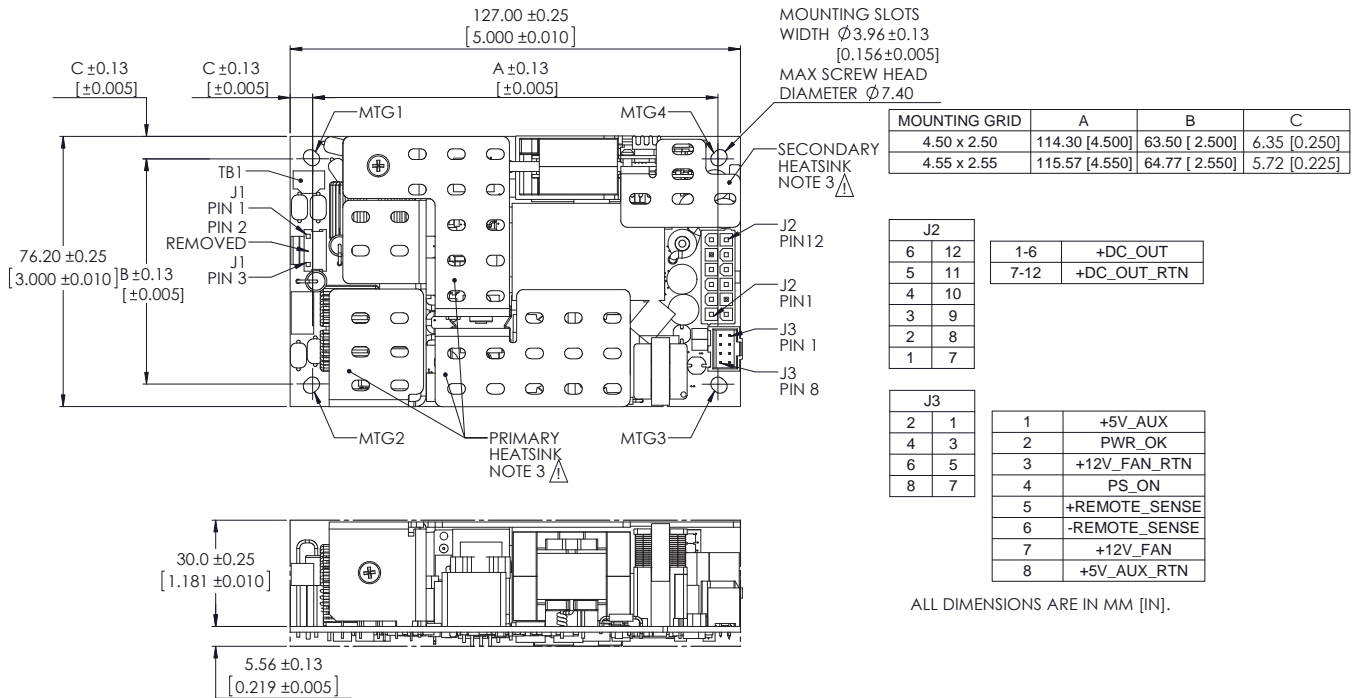

ALL DIMENSIONS ARE IN MM [IN].

#### SAFETY CONSIDERATION NOTES:

- Protective bonding conductor from the end product protective earthing terminal must be tied to TB1. For optimum EMI performance, while maintaining Class I safety isolation all 4 mounting holes must be tied to the end product protective earthing terminal. To maintain Class II safety isolation mounting holes MTG1 and MTG2 need to be isolated from protective earth and should use standoffs of non-conductive material.
- This power supply requires mounting standoffs of minimum 6mm in height. If there is risk of chassis deformation or shorter standoff height is required, an appropriate insulator must be used under the power supply with adequate extension beyond the outline of the power supply. In all cases, the applicable safety standards must be applied to ensure proper creepage and clearance requirements are met.
- The primary heatsink is considered a live primary circuit, and should not be touched. It is recommended that the primary heatsink be kept at least 3.5mm from chassis and 7mm from secondary circuits. In all cases, the applicable safety standards must be applied to ensure proper creepage and clearance requirements are met.
- This product is subject to the following operating requirements and the Life and Safety Critical Application Sales Policy: Refer to: <http://www.murata-ps.com/requirements/>
- Used only in non-tropical conditions.
- Double pole/neutral fusing.


Dimensions: 3.0" x 5.0" x 1.4" (76.2mm x 127mm x 35.6mm)

### INPUT/OUTPUT CONNECTOR AND SIGNAL SPECIFICATION AND MATING CONNECTORS – MVAC400-xxAF and MVAC400-xxAFD

| Connector                                | PIN            | Description   | Mating Housing   | Crimp terminal/pins                                          |
|------------------------------------------|----------------|---------------|------------------|--------------------------------------------------------------|
| Input Connector J1:<br>Molex 26-62-4030  | 1              | AC Neutral    | Molex 0009930300 | Molex 0008500105 (18-24 AWG)<br>Molex 0008500107 (22-26 AWG) |
|                                          | 3              | AC Line       |                  |                                                              |
| Output Connector J2:<br>Molex 39-28-1123 | 1,2,3,4,5,6    | +DC_OUT       | Molex 0039012125 | Molex 0039000038                                             |
|                                          | 7,8,9,10,11,12 | +DC_OUT_RTN   |                  |                                                              |
| Output Connector J3:<br>Molex 90130-1108 | 1              | +5V_AUX       | Molex 0901420008 | Molex 0901190109                                             |
|                                          | 2              | PWR_OK        |                  |                                                              |
|                                          | 3              | +12V_FAN_RTN  |                  |                                                              |
|                                          | 4              | PS_ON         |                  |                                                              |
|                                          | 5              | +Remote Sense |                  |                                                              |
|                                          | 6              | -Remote Sense |                  |                                                              |
|                                          | 7              | +12V_FAN      |                  |                                                              |
|                                          | 8              | +5V_AUX_RTN   |                  |                                                              |



### MECHANICAL DIMENSIONS – MVAC400-xxAFT and MVAC400-xxAFR

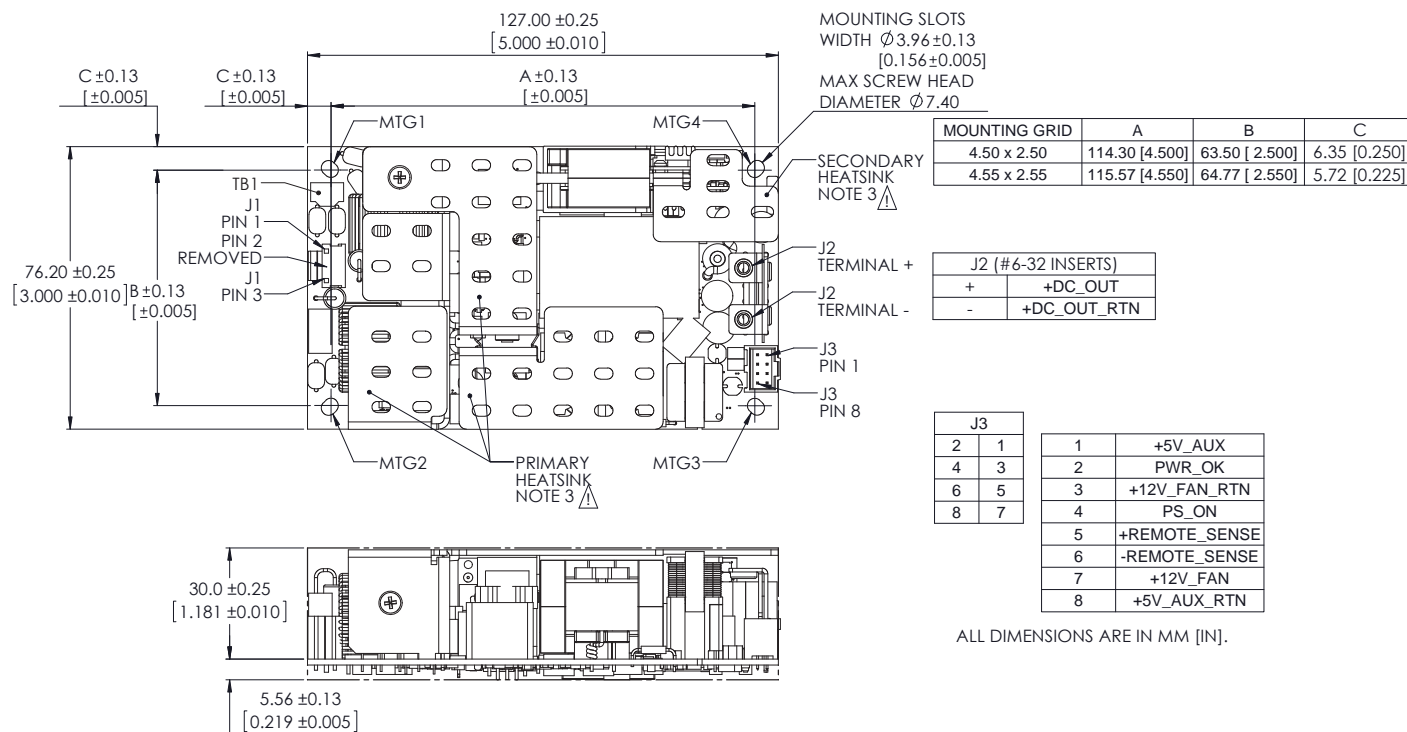

Dimensions: 3.0" x 5.0" x 1.4" (76.2mm x 127mm x 35.6mm)

### INPUT/OUTPUT CONNECTOR AND SIGNAL SPECIFICATION AND MATING CONNECTORS – MVAC400-xxAFT AND MVAC400-xxAFR

| Connector                                | PIN | Description   | Mating Housing   | Crimp terminal/pins                                          |
|------------------------------------------|-----|---------------|------------------|--------------------------------------------------------------|
| Input Connector J1:<br>Molex 26-62-4030  | 1   | AC Neutral    | Molex 0009930300 | Molex 0008500105 (18-24 AWG)<br>Molex 0008500107 (22-26 AWG) |
|                                          | 3   | AC Line       |                  |                                                              |
| Output Connector J2:                     | +   | +DC_OUT       |                  | 6-32 machine screws                                          |
|                                          | -   | +DC_OUT_RTN   |                  |                                                              |
| Output Connector J3:<br>Molex 90130-1108 | 1   | +5V_AUX       | Molex 0901420008 | Molex 0901190109                                             |
|                                          | 2   | PWR_OK        |                  |                                                              |
|                                          | 3   | +12V_FAN_RTN  |                  |                                                              |
|                                          | 4   | PS_ON         |                  |                                                              |
|                                          | 5   | +Remote Sense |                  |                                                              |
|                                          | 6   | -Remote Sense |                  |                                                              |
|                                          | 7   | +12V_FAN      |                  |                                                              |
|                                          | 8   | +5V_AUX_RTN   |                  |                                                              |

Murata Power Solutions, Inc.  
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
ISO 9001 and 14001 REGISTERED



**This product is subject to the following operating requirements and the Life and Safety Critical Application Sales Policy. Refer to: <http://www.murata-ps.com/requirements/>**

Murata Power Solutions, Inc. ("Murata") makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards that anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm, and take appropriate remedial actions. Buyer will fully indemnify Murata, its affiliated companies, and its representatives against any damages arising out of the use of any Murata products in safety-critical applications. Specifications are subject to change without notice.

© 2014 Murata Power Solutions, Inc.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.