

Measurement condition

| | | |
|-----------------------------|-------------------------|-----|
| Ambient temperature T_A : | 23 | °C |
| Input power level: | 0 | dBm |
| Terminating impedance: * | | |
| Input: | 120 Ω -2.4 pF | |
| Output: | 140 Ω -2.4 pF | |

Characteristics

Remark:

Reference level for the relative attenuation a_{rel} of the TFS868T is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_c is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The nominal frequency f_N is fixed at 868.80 MHz without tolerance. The given values for the relative attenuation a_{rel} have to be reached at the frequencies given below even if the centre frequency f_c is shifted due to the temperature coefficient of frequency TC_f in the operating temperature range and due to a production tolerance for the centre frequency f_c .

| D a t a | | typ. value | tolerance / limit |
|---|---------------------|---------------------------|--------------------------|
| Insertion loss | a_e | 2.85 dB | max. 3.6 dB |
| (reference level) | | | |
| Nominal frequency | f_N | - | 868.80 MHz |
| Centre frequency | f_c | 868.80 MHz | - |
| Passband | PB | 1.30 MHz | min. \pm 300 kHz |
| Passband ripple | p-p | 0.6 dB | max. 3 dB |
| Amplitude ripple $f_N \pm 200$kHz | p-p | 0.45 dB | max. 2 dB |
| Relative attenuation | a_{rel} | | |
| f_N | $f_N \pm 200.0$ kHz | 0.45 dB | max. 2 dB |
| $f_N \pm 200.0$ kHz | $f_N \pm 300.0$ kHz | 0.52 dB | max. 3 dB |
| $f_N - 858.3$ MHz | $f_N - 12.3$ MHz | 56 dB | min. 50 dB |
| $f_N - 12.3$ MHz | $f_N - 2.8$ MHz | 36 dB | min. 30 dB |
| $f_N + 2.7$ MHz | $f_N + 11.7$ MHz | 41 dB | min. 30 dB |
| $f_N + 11.7$ MHz | $f_N + 21.7$ MHz | 43 dB | min. 40 dB |
| $f_N + 21.7$ MHz | $f_N + 27.7$ MHz | 51 dB | min. 45 dB |
| $f_N + 27.7$ MHz | $f_N + 131.7$ MHz | 57 dB | min. 50 dB |
| Input power level | | - | max. 12 dBm |
| Operating temperature range | OTR | - | - 20 °C ... + 70 °C |
| Storage temperature range | | - | - 55 °C ... + 125 °C |
| Frequency inversion temperature | | 10 °C | - |
| Temperature coefficient of frequency | TC_f ** | -0.033 ppm/K ² | - |

*) The terminating impedances depend on parasitics and q-values of matching elements and the board used and are to be understood as reference values only. Should there be additional questions do not hesitate to ask for an application note or contact our design team.

**) $\Delta f = TC_f(T - T_0)^2 f_N$



Generated:

Checked / Approved:

Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com


Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Filter characteristic

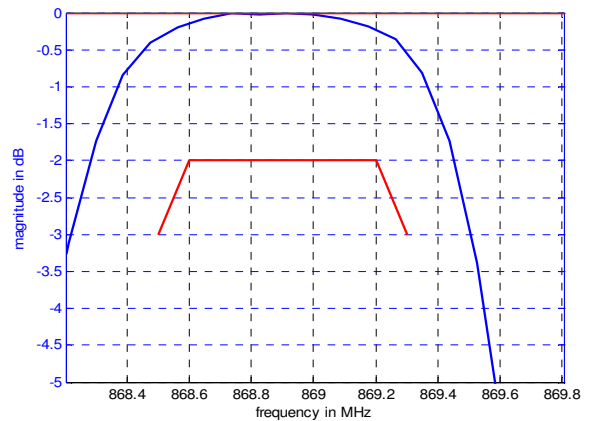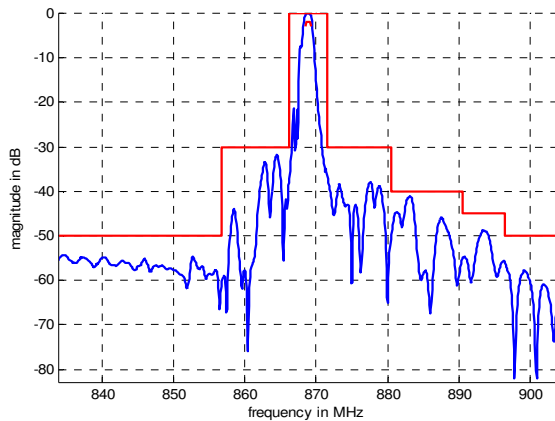

Construction and pin connection


(All dimensions in mm)

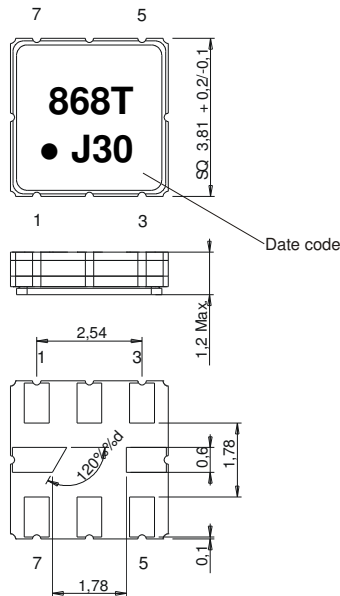

- 1 Input
- 2 Ground
- 3 Ground
- 4 Ground
- 5 Output
- 6 Ground
- 7 Ground
- 8 Ground

Date code: Year + week
 J 2017
 K 2018
 L 2019
 ..

50 Ω Test circuit

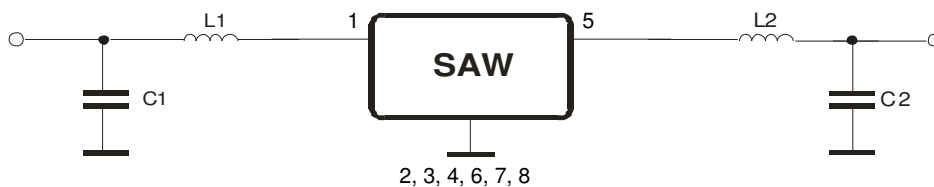

Vectron International GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Stability characteristics, reliability

After the following tests the filter shall meet the whole specification:

1. Shock: 500 g, 1 ms, half sine wave, 3 shocks each plane;
DIN IEC 60068 T2 - 27
2. Vibration: 10 Hz to 2000 Hz, 0.35 mm or 5 g respectively, 1 octave per min, 10 cycles per plane, 3 planes; DIN IEC 60068 T2 - 6
3. Change of temperature: -55 °C to 125 °C / 15 min. each / 100 cycles
DIN IEC 60068 part 2 – 14 Test N
4. Resistance to solder heat (reflow): reflow possible: three times max.;
for temperature conditions refer to the attached "Air reflow temperature conditions" on page 4;
5. SAW devices are Electrostatic Discharge (ESD) sensitive devices.

This filter is RoHS compliant (2011/65/EU)


Packing

Tape & Reel: IEC 286 – 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

| | |
|---|-------------|
| reel of empty components at start: | min. 300 mm |
| reel of empty components at start including leader: | min. 500 mm |
| trailer: | min. 300 mm |


Tape (all dimensions in mm)

- W : 12.00 ±0.3
- Po : 4.00 ±0.1
- Do : 1.50 +0.1/-0
- E : 1.75 ±0.1
- F : 5.50 ±0.05
- G(min) : 0.75
- P2 : 2.00 ±0.05
- P1 : 8.00 ±0.1
- D1(min) : 1.50
- Ao : 4.30 ±0.1
- Bo : 4.30 ±0.1
- Ct : 9.2 ±0.1
- Ko : 1.80 ±0.1
- t : 0.30 ±0.05

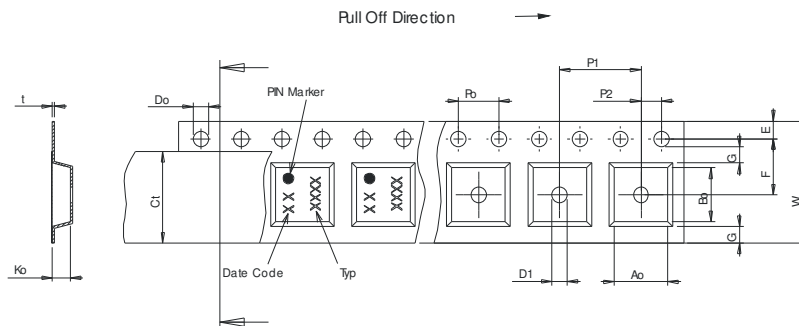

Reel (all dimensions in mm)

- A : 330 or 180
- W1 : 12.4 +2/-0
- W2(max) : 18.40
- N(min) : 50.00
- C : 13.0 +0.5/-0.2

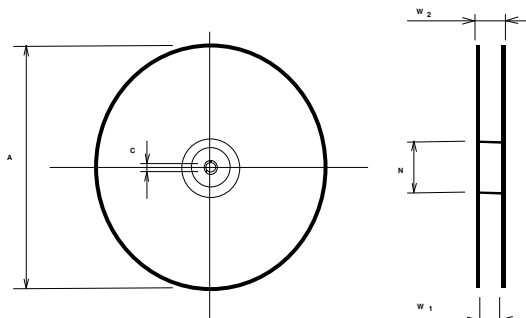

The minimum bending radius is 45 mm.


Vectron International GmbH
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Air reflow temperature conditions

| Conditions | Exposure |
|---|-----------------------------|
| Average ramp-up rate (30 °C to 217 °C) | less than 3 °C / second |
| > 100 °C | between 300 and 600 seconds |
| > 150 °C | between 240 and 500 seconds |
| > 217 °C | between 30 and 150 seconds |
| Peak temperature | max. 260 °C |
| Time within 5 °C of actual peak temperature | between 10 and 30 seconds |
| Cool-down rate (Peak to 50 °C) | less than 6 °C / second |
| Time from 30 °C to Peak temperature | no greater than 300 seconds |

Chip-mount air reflow profile

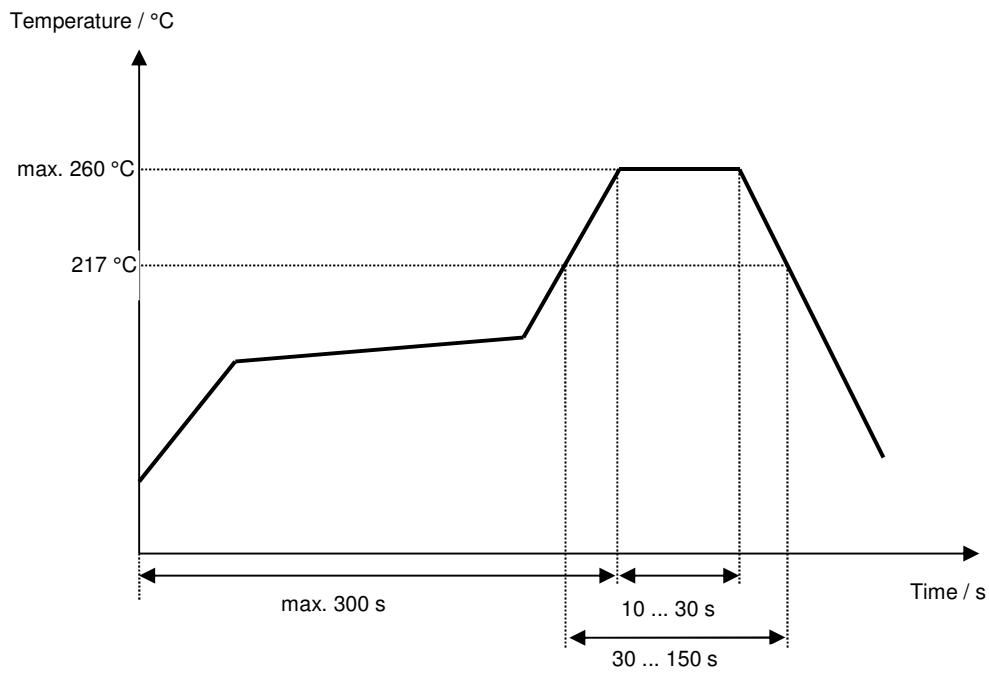

Vectron International GmbH
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-0 / Fax: (+49) 3328 4784-30
 E-Mail: tft@vectron.com

Vectron International GmbH reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

History

| Version | Reason of Changes | Name | Date |
|----------------|--|-------------|-------------|
| 1.0 | - generation of filter specification | Abutaimah | 09.03.2017 |
| 2.0 | - correct passband ripple conditions - update storage temperature range - update tape & reel dimensions - update tape & reel pull off direction - correct typo in remark section | Bonnen | 25.07.2017 |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.