

REV.	ECN NO.	REVISIONS	DRN.	CKD.	APP.	DATE
A		NEW RELEASE	AV			


LED COLOR = YELLOW DIFFUSED					
OPERATING CHARACTERISTICS AT 25°C AMBIENT					
CHARACTERISTICS	MIN	TYP	MAX	UNITS	TEST CONDITIONS
LUMINOUS INTENSITY	2.2	6.3		mcd	$I_f = 10 \text{ mA}$
FORWARD VOLTAGE		2.1	3.0	V	$I_f = 10 \text{ mA}$
REVERSE VOLTAGE	3			V	$I_R = 10 \text{ }\mu\text{A}$
PEAK WAVELENGTH		585		nm	
VIEWING ANGLE		45		Degree	
CAPACITANCE		5.0		pf	$V_R = 0 \text{ V}, f = 1 \text{ MHz}$

POS. 1	POS. 2	POS. 3	POS. 4
RED	**BLANK**	**BLANK**	YELLOW


NOTES:

- LEADS TO FIT INTO HOLES SPACED AS PER HOLE PATTERN
- LEADS TO BE FREE OF DEFORMATION AFTER BENDING AND CUTTING
- LED LEAD DIMENSIONS SHOWN ARE MEASURED AT HOUSING EXIT
- DIALIGHT PART NUMBER = 551-0004-832

LED COLOR = YELLOW DIFFUSED		
ABSOLUTE MAXIMUM RATING AT 25°C AMBIENT		UNITS
POWER DISSIPATION		mW
DERATE LINEARLY FROM 50°C		$\text{mA}/^\circ\text{C}$
CONTINUOUS FORWARD CURRENT		mA
PEAK FORWARD CURRENT (1/10 DUTY CYCLE, 0.1 ms PULSE WIDTH)		mA
LEAD SOLDERING TEMPERATURE, 5 SEC., 1/16" FROM BODY		$^\circ\text{C}$
OPERATING TEMPERATURE		$^\circ\text{C}$
STORAGE TEMPERATURE		$^\circ\text{C}$

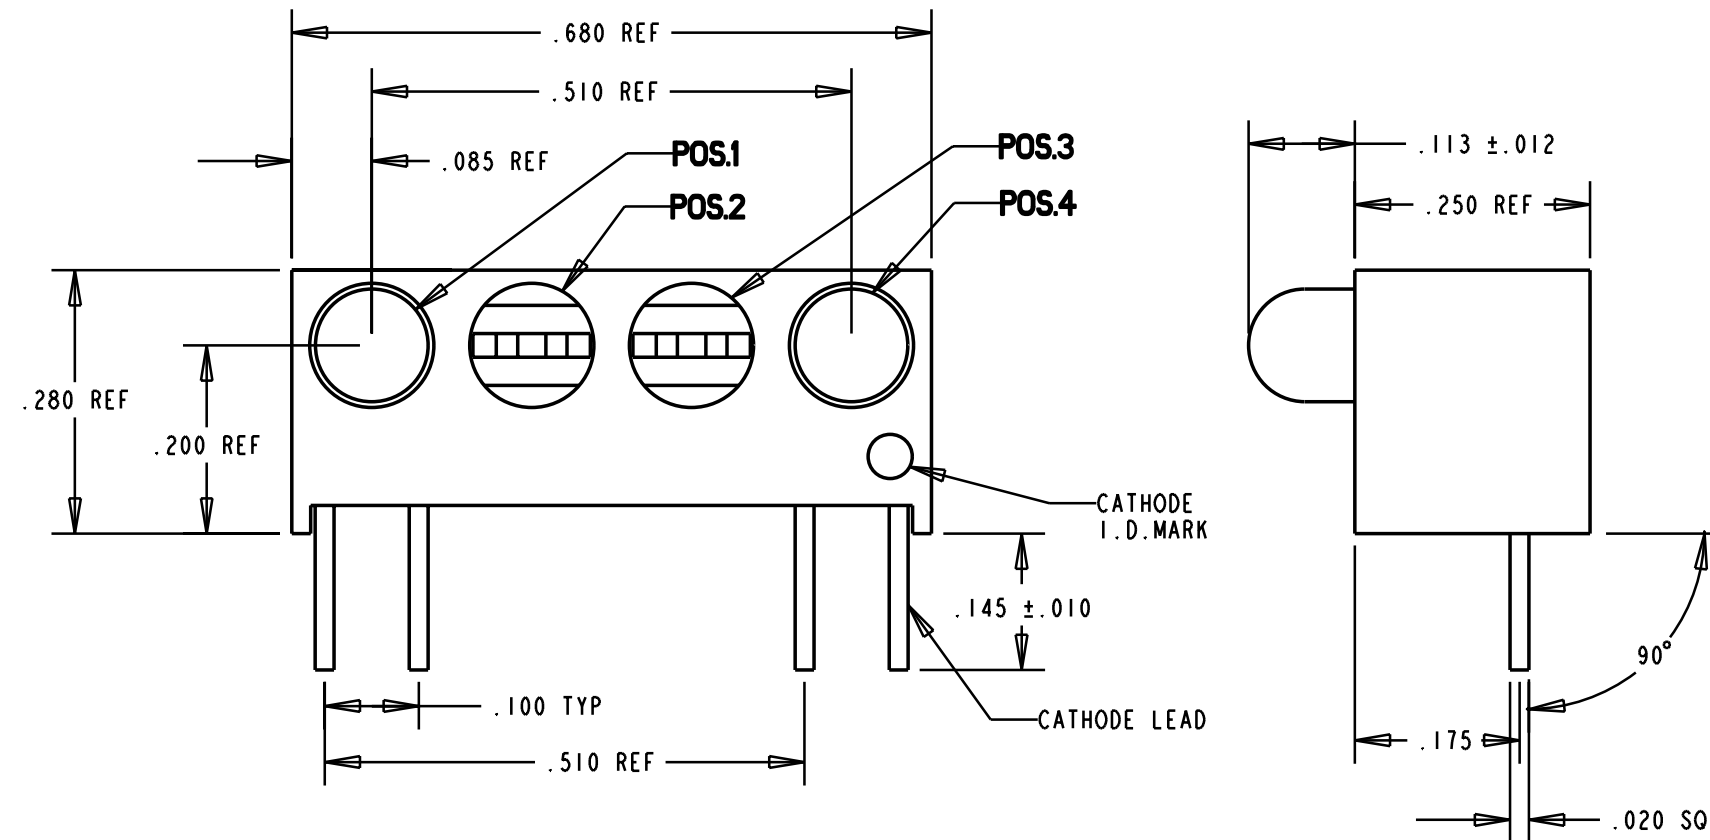

LED COLOR = RED DIFFUSED					
OPERATING CHARACTERISTICS AT 25°C AMBIENT					
CHARACTERISTICS	MIN	TYP	MAX	UNITS	TEST CONDITIONS
LUMINOUS INTENSITY	3.6	10		mcd	$I_f = 10 \text{ mA}$
FORWARD VOLTAGE		2.0	3.0	V	$I_f = 10 \text{ mA}$
REVERSE VOLTAGE	3.0			V	$I_R = 10 \text{ }\mu\text{A}$
PEAK WAVELENGTH		650		nm	
VIEWING ANGLE		45		Degree	
CAPACITANCE		9.2		pf	$V_R = 0 \text{ V}, f = 1 \text{ MHz}$

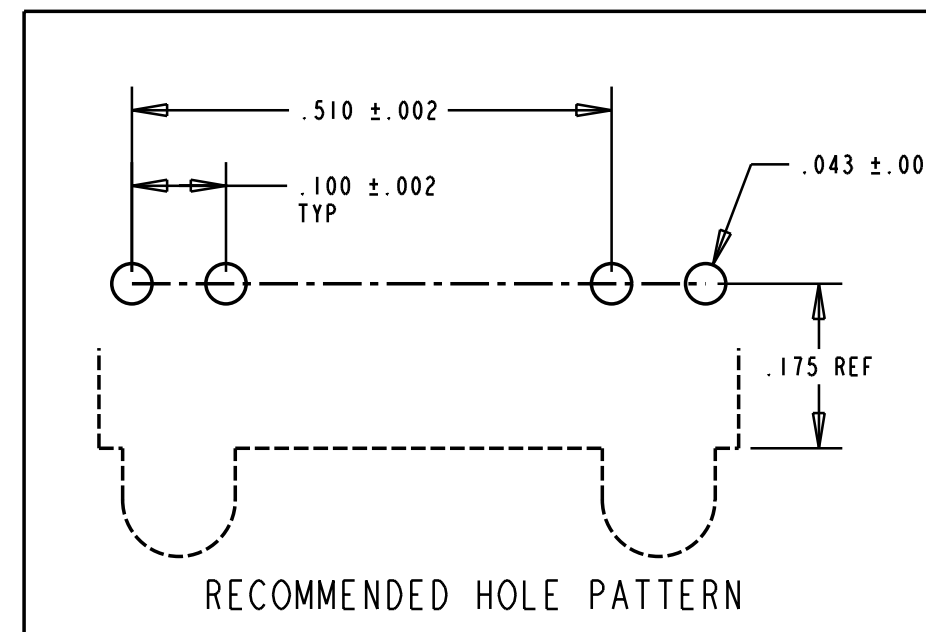

LED COLOR = RED DIFFUSED		
ABSOLUTE MAXIMUM RATING AT 25°C AMBIENT		UNITS
POWER DISSIPATION		mW
DERATE LINEARLY FROM 50°C		$\text{mA}/^\circ\text{C}$
CONTINUOUS FORWARD CURRENT		mA
PEAK FORWARD CURRENT (1/10 DUTY CYCLE, 0.1 ms PULSE WIDTH)		mA
LEAD SOLDERING TEMPERATURE, 5 SEC., 1/16" FROM BODY		$^\circ\text{C}$
OPERATING TEMPERATURE		$^\circ\text{C}$
STORAGE TEMPERATURE		$^\circ\text{C}$

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.

SCALE 5:1	DRAWING NUMBER	REV
ALL DIM'S IN: INCHES	C-16573	A
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE	
FRACTIONS: ±1/64	1x4 CBI BLOCK	
DECIMALS (.XX): ±.020	MATERIAL	
DECIMALS (.XXX): ±.015		
DECIMALS (.XXXX): ±.010		
ANGLES: ±1°		
FINISH:	<b>Dialight</b>	1913 ATLANTIC AVE. MANASQUAN, N.J. 08736
FSCM 83330	SHEET OF	FAMILY TABLE:



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.