


# SPECIFICATION CONTROL DRAWING

**55A6160**

TITLE TWO CONDUCTOR CABLE, DOUBLE SHIELDED, DOUBLE JACKETED, GENERAL PURPOSE, 600 VOLT	Date 6-10-13	Revision D
This specification sheet forms a part of the latest issue of Raychem Specification 55A.		

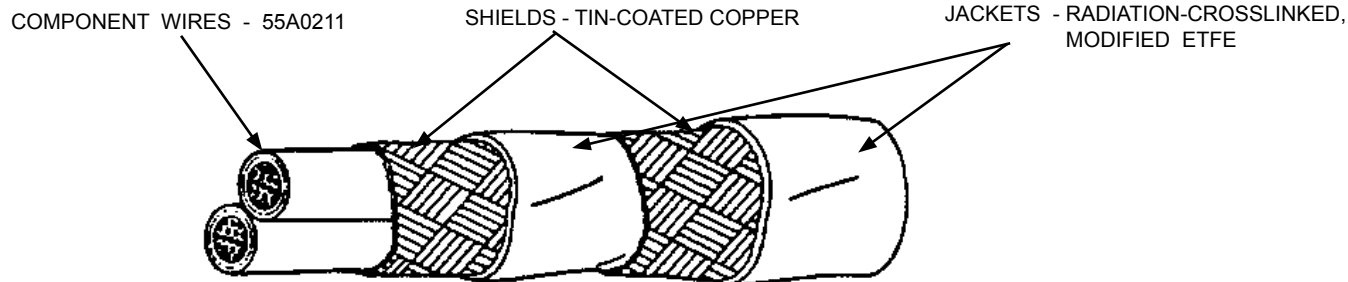

### CABLE CONSTRUCTION DETAILS

PART NUMBER <i>1/</i>	CONDUCTOR SIZE (AWG)	INNER SHIELD SIZE (AWG)	INNER JACKET THICKNESS (inches)		OUTER SHIELD SIZE (AWG)	OUTER JACKET THICKNESS (inches)		OUTSIDE DIAMETER (inches)		MAXIMUM WEIGHT (lb/1000 ft)
			MINIMUM	NOMINAL		MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
			55A6160-22-*	22		38	.006	.008	38	
55A6160-20-*	20	38	.006	.008	38	.006	.008	.172	.183	28.6
55A6160-18-*	18	38	.006	.008	38	.006	.008	.192	.205	36.3

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

<p>TEMPERATURE RATING: 150°C          Maximum continuous conductor temperature</p> <p>VOLTAGE RATING: 600 volts (rms) at sea level</p> <p>ACCELERATED AGING: 300 ± 3°C for 7 hours</p> <p>BLOCKING: 200 ± 3°C for 6 hours</p> <p>DIELECTRIC WITHSTAND:          1500 volts (rms), 60 Hz, conductor to conductor and shield          500 volts (rms), 60 Hz, shield to shield</p> <p>FLAMMABILITY (Procedure 1): 3 seconds (maximum);          3 in. (maximum); no flaming of facial tissue</p> <p>JACKET COLOR: White preferred</p> <p>JACKET ELONGATION AND TENSILE STRENGTH:          Elongation, 50% (minimum)          Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)</p> <p>JACKET FLAWS:          Spark Test, 1000 volts (rms)          Impulse Dielectric Test, 6.0 kV (peak)</p> <p>NOTE: Nominal values are for information only.          Nominal values are not requirements.</p>	<p>LIFE CYCLE: 200 ± 3°C for 168 hours</p> <p>LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours</p> <p>SHIELD COVERAGE: 85% (minimum) (each)</p> <p>VOLTAGE WITHSTAND TEST (Post Environmental):          1000 volts (rms), 60 Hz, 1 minute</p> <p>CABLE IDENTIFICATION: Mark outer jacket surface in green ink at 6 inch (nominal) intervals between marks as follows: " 55A6160-AWG- ** "          ** = Applicable Manufacturer CAGE code as follows:          06090 = Menlo Park, CA          SU473 = Tijuana, MX</p> <p>PART NUMBER:          The "*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the inner jacket color and a dash separating the inner jacket color from the outer jacket color.</p> <p><i>1/</i> Example: AWG 20, red and blue component wires;          white inner jacket and white outer jacket:          55A6160-20-2/6-9-9</p>
---	--

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice. Tyco Electronics Corporation also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.		
<b>1/</b> COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902.." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.		
Page 1 of 1	Raychem, TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks. DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL. THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.	 Raychem Wire & Cable 501 Oakside Avenue Redwood City, CA 94063-3800 Phone: 1-800-227-8816 Fax: 1-650-361-6297



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.