

SM5817PL THRU SM5819PL

Schottky Barrier Diodes 20 to 40 Volts

Features

- Halogen free available upon request by adding suffix "-HF"
- High Surge Capability
- Low Forward Voltage
- Low Profile Package
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)


Mechanical Data

- Packaging: SOD-123FL
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Marking Code: SM5817PL---K2; SM5818PL---K3 ; SM5819PL---K4

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{RMS}	Maximum RMS Voltage	SM5817PL	14
		SM5818PL	21
		SM5819PL	28
V_{RRM}	Repetitive Reverse Voltage	SM5817PL	20
		SM5818PL	30
		SM5819PL	40
V_{DC}	DC Blocking Voltage	SM5817PL	20
		SM5818PL	30
		SM5819PL	40
$I_{F(AV)}$	Rectified Current (Average) Half Wave Rectification with Resist. Load at $T_L=90^{\circ}C$	1.0	A
I_{FRM}	Repetitive Peak Forward Current	1.2(Min) 1.5(Max)	A
I_{FSM}	Surge Forward Current at $t=8.3ms$	30	A
$R_{\theta JA}$	Typical Thermal Resistance(Note2)	88	$^{\circ}C/W$
$R_{\theta JC}$		43	$^{\circ}C/W$
$R_{\theta JL}$		30	$^{\circ}C/W$
P_D	Power Dissipation	1.14	W
T_J	Junction Temperature	-65 to +125	$^{\circ}C$
T_{STG}	Storage Temperature	-65 to +125	$^{\circ}C$

SOD-123FL

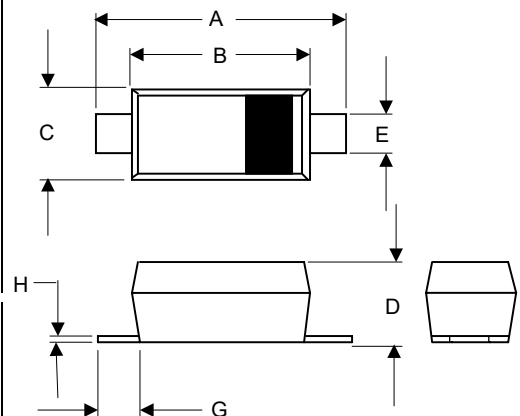


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.140	.152	3.55	3.85	
B	.100	.122	2.55	3.10	
C	.055	.075	1.40	1.90	
D	.035	.053	0.90	1.35	
E	.020	.041	0.50	1.05	
G	.010	-----	0.25	-----	
H	-----	.010	-----	.25	

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
V_F	Forward Voltage (@ $I_F=1A$) SM5817PL	---	---	0.45	V
	(@ $I_F=1A$) SM5818PL~5819PL	---	---	0.53	
	(@ $I_F=0.1A$) SM5818PL~5819PL	---	---	0.375	
	(@ $I_F=0.5A$) SM5818PL~5819PL	---	---	0.45	
I_R	Leakage Current@VR @ $T_A=25^{\circ}C$	---	---	0.1	mA
	@ $T_A=100^{\circ}C$	---	---	9.0	
	(@VR=15V) SM5818PL~5819PL	---	---	20	
C_j	Typical Junction Capacitance @ $f=1.0MHz, V_r=4V$	---	50	---	pF

Note: 1. High Temperature Solder Exemptions Applied, see EU Directive Anne 7a
2. Thermal Resistance : PC Board Mounted on 0.2"0.2"(5*5mm) copper pad area.

SUGGESTED SOLDER PAD LAYOUT

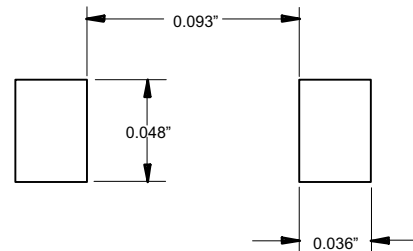

SM5817PL-SM5819PL

FIG1: TYPICAL FORWARD CURRENT

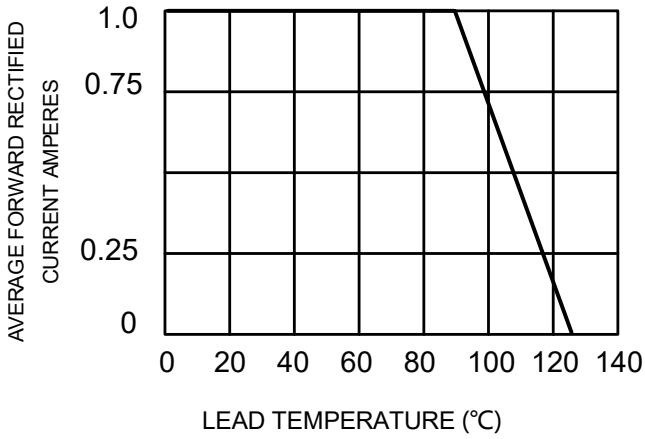


FIG2: Surge Forward Current Capability

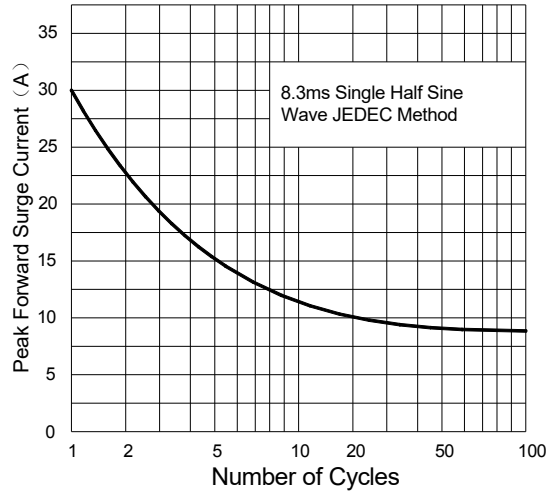


FIG3: Instantaneous Forward Voltage


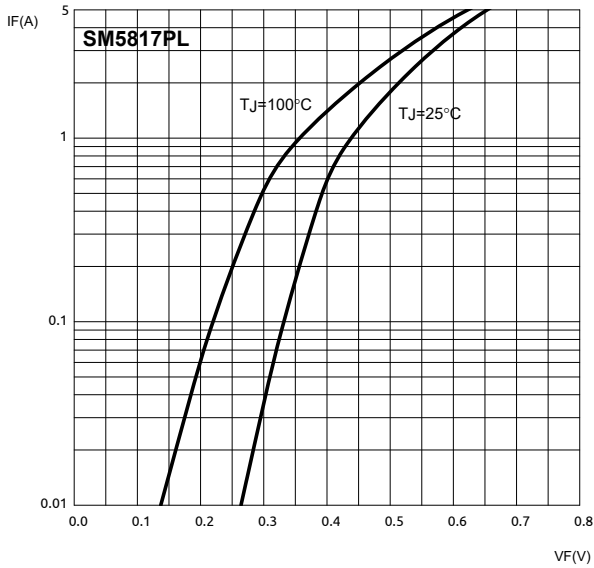


FIG4: Instantaneous Forward Voltage

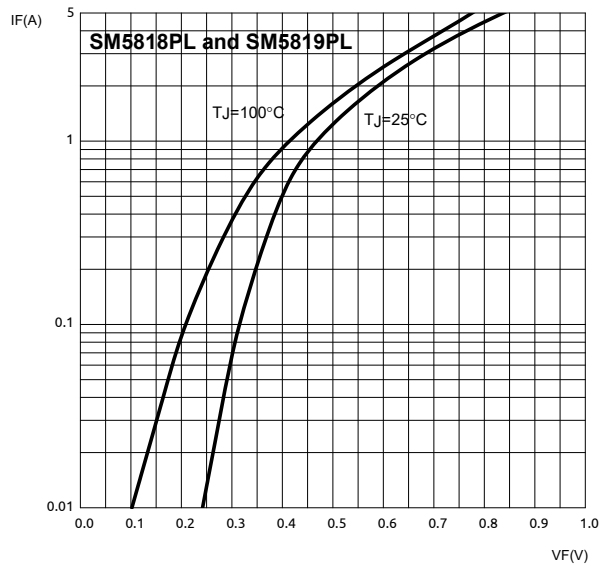

SM5817PL-SM5819PL

FIG.5: TYPICAL REVERSE CHARACTERISTICS


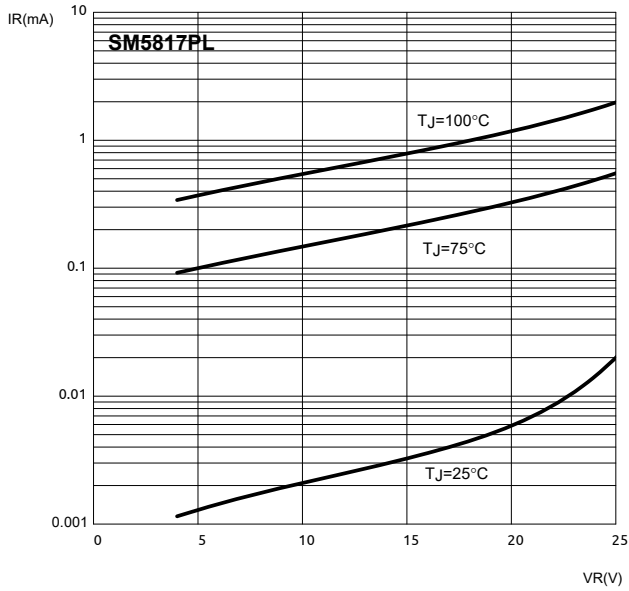


FIG.6: TYPICAL REVERSE CHARACTERISTICS



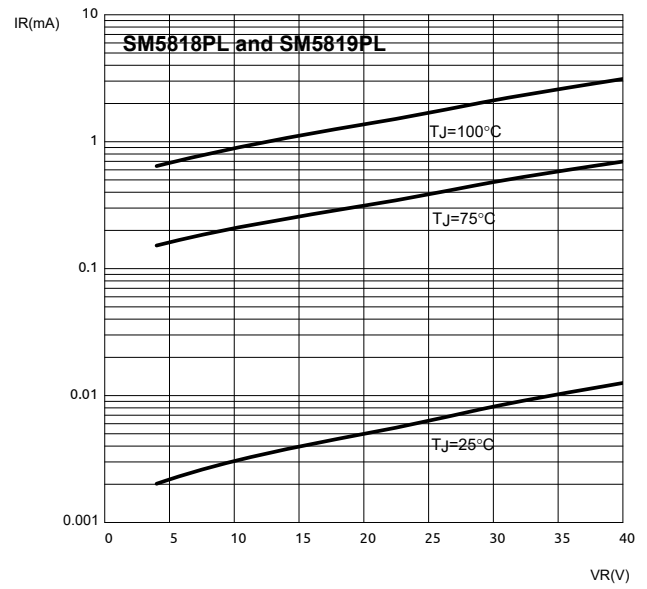

Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 2.5Kpcs/Reel

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

www.mccsemi.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.