
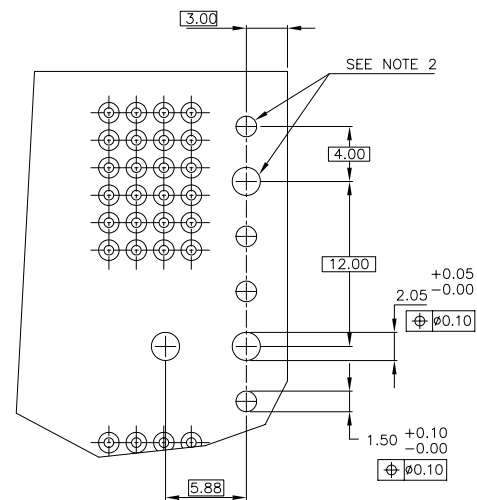
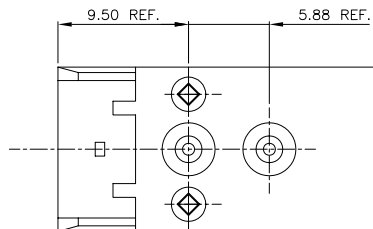

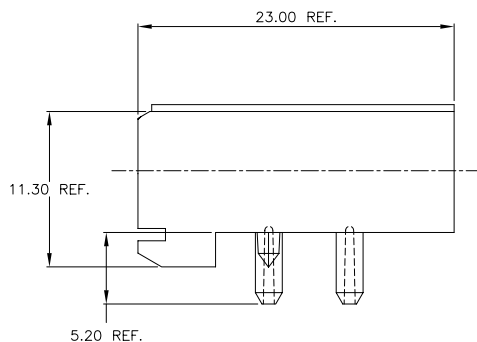


PRODUCT NUMBER	DESCRIPTION
88917-101 & -101LF	HEAT STAKE VERSION

FRONT VIEW



REQUIRED PC BOARD LAYOUT COMPONENT SIDE

NOTE:

- HOUSING MATERIAL: LCP, 30% GLASS FILLED
FLAME RETARDANT PER UL 94V-0.
COLOR: NATURAL
- INDICATED HOLES ARE UNPLATED
- PART NUMBER WITH "LF" SUFFIX AT THE END ARE LEAD FREE OPTION
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20
SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW
OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.





mat'l. code				surface		tolerance	projection	product family	
SEE NOTES				ISO 1302		ISO 406 ISO 1101		METRAL ACC.	
ltr	ecr	no	dr	date	tolerances unless otherwise specified			title	
F	C80040	MDF		7/23/98	angles	linear	xx ±.01/.3	mm	
G	H80473	MDF		7/23/98			xxx ±.005/.13		
H	V02701	JWS		10/19/00	0°±2'		xxxx ±.0020/.050	scale 1:1	
J	V11668	LSS		6/13/01	dr	S. STONER	9/30/93	FCI	
K	V12868	CGD		1/02/02	enr	R. DOUTRICH	9/30/93		
L	M05-0262	MHT		12/20/05	chr	S. STONER	9/30/93		
M	M06-0286	MNR		7/27/06	appd	S. STONER	9/30/93		
sheet	revision	M	M	M	M	M		type	
index	sheet	1	2	3	4			Product Customer Drawing	

RECEPTACLE GUIDE
MODULE, 4 ROW

dwg no 88917 sheet 1 of 4 size A3

PRODUCT NUMBER	DESCRIPTION
88917-201 & -201LF	PRESS-PEG VERSION

FRONT VIEW

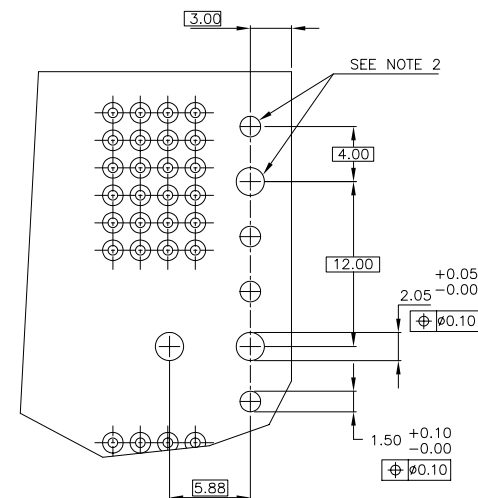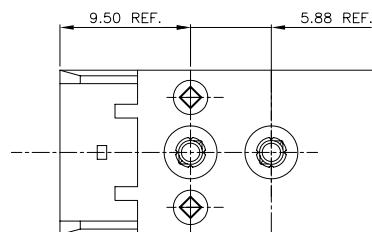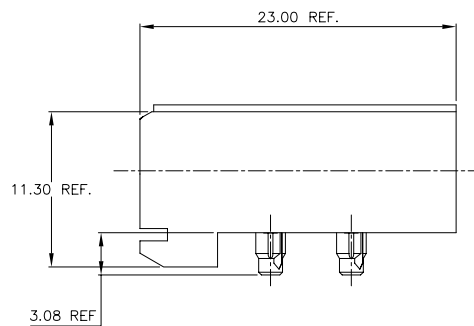


REQUIRED PC BOARD LAYOUT
COMPONENT SIDE





NOTE:

- HOUSING MATERIAL: LCP, 30% GLASS FILLED
FLAME RETARDANT PER UL 94V-0.
COLOR: NATURAL
- INDICATED HOLES ARE UNPLATED
- PART NUMBER WITH "LF" SUFFIX AT THE END ARE LEAD FREE OPTION
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20
SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW
OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family METRAL ACC.
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
M					angles	linear	RECEPTACLE GUIDE MODULE, 4 ROW
					0°±2'	xxx ±.01/.3 xxx ±.005/.13 xxxx ±.0020/.050	mm
					dr	S. STONER 9/30/93	scale 1:1
					enr	R. DOUTRICH 9/30/93	FCI
					chr	S. STONER 9/30/93	dwg no 88917 sheet 2 of 4 size A3
					appd	S. STONER 9/30/93	type Product Customer Drawing
sheet index	revision sheet						

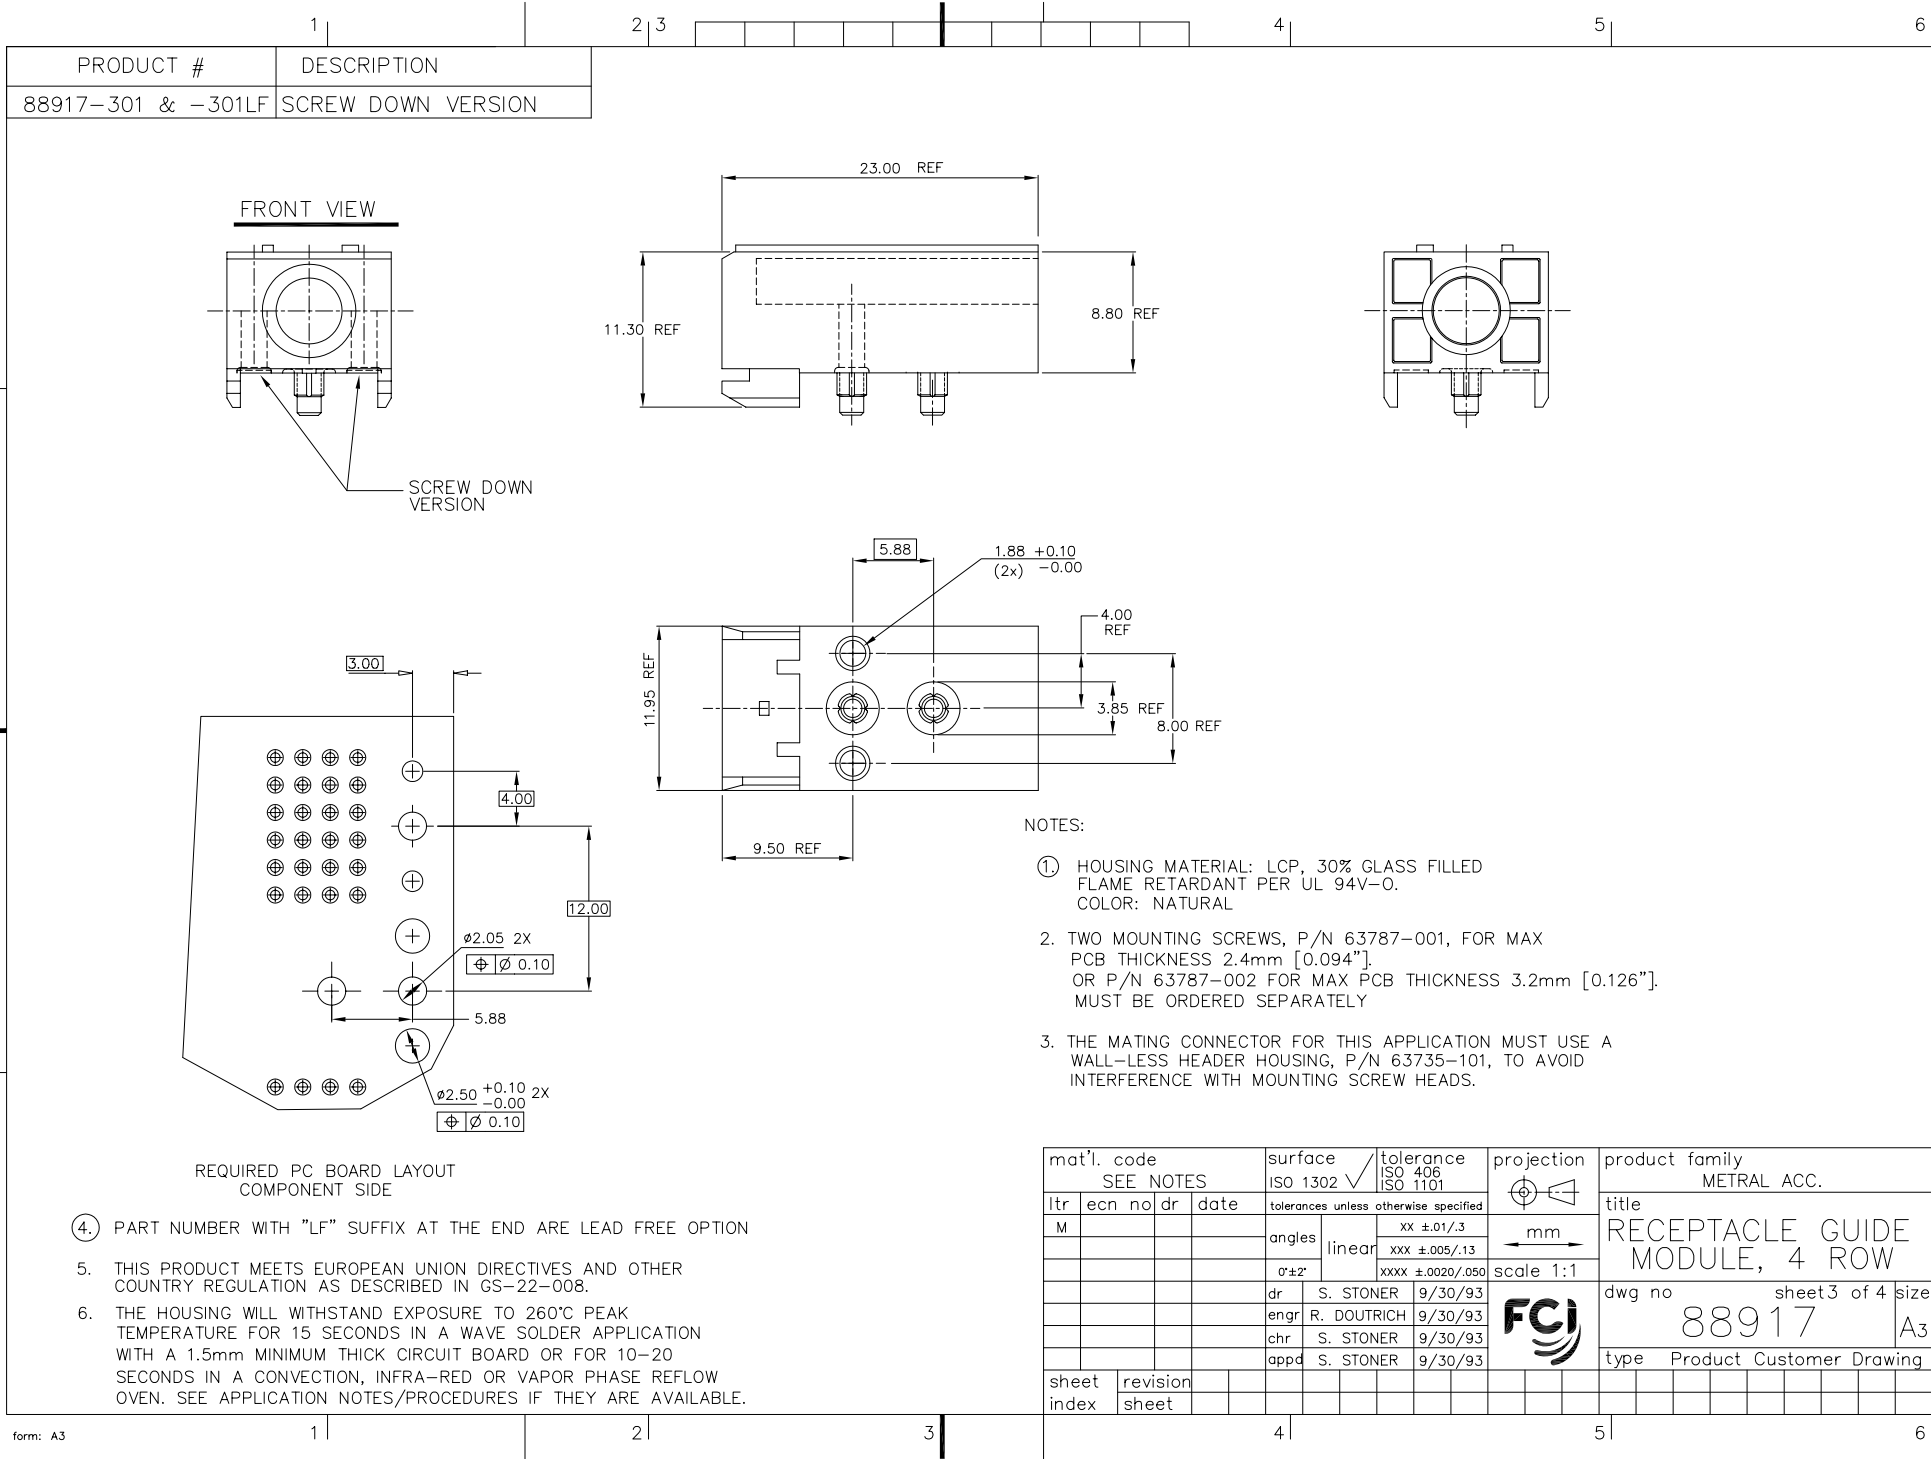

PRODUCT #	DESCRIPTION
88917-401 & -401LF	CLAW RETENTION VERSION

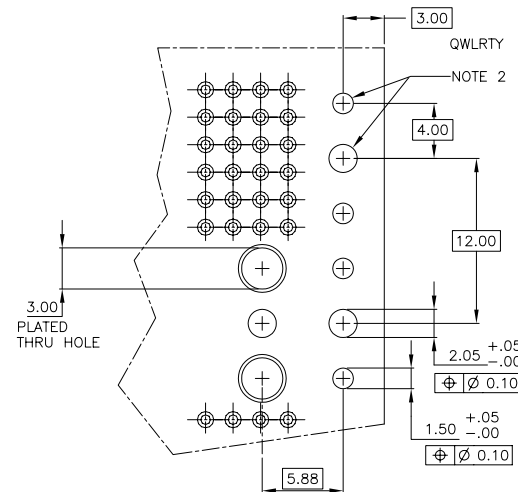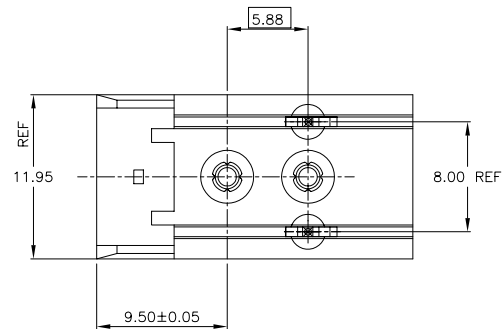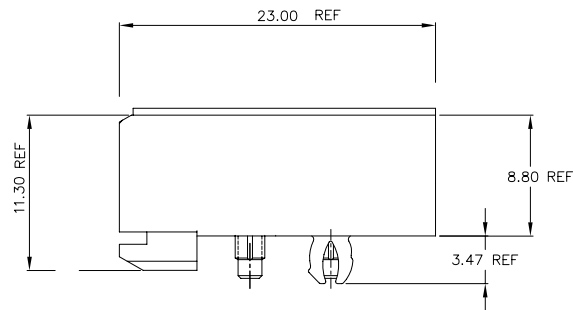

REQUIRED P.C. BOARD LAYOUT
COMPONENT SIDE

NOTES:

- HOUSING MATERIAL: LCP, 30% GLASS FILLED
FLAME RETARDANT PER UL 94V-0.
COLOR: NATURAL
- INDICATED HOLES ARE UNPLATED.

③ PART NUMBER WITH "LF" SUFFIX AT THE END ARE LEAD FREE OPTION

- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD OR FOR 10-20 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.

mat'l. code SEE NOTES				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection mm	product family METRAL ACC.
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title
M					angles	linear	RECEPTACLE GUIDE MODULE, 4 ROW
					0°±2'	xxx ±.01/.3 xxx ±.005/.13 xxxx ±.0020/.050	mm
					dr	S. STONER 9/30/93	scale 1:1
					enr	R. DOUTRICH 9/30/93	FCI
					chr	S. STONER 9/30/93	dwg no
					appd	S. STONER 9/30/93	88917
sheet	revision						type Product Customer Drawing
index	sheet						sheet 4 of 4 size A3



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.