

**380kHz, 3A Asynchronous DC - DC Buck Converter****AP3203****General Description**

The AP3203 is a 380kHz fixed frequency, current mode, PWM buck (step-down) DC-DC converter, capable of driving a 3A load with high efficiency, excellent line and load regulation. The device integrates N-channel power MOSFET switch with low on-resistance. The current mode control provides fast transient response and cycle-by-cycle current limit.

A standard series of inductors are available from several different manufacturers optimized for use with the AP3203. This feature greatly simplifies the design of switch-mode power supplies.

This IC is available in PSOP-8 package.

**Features**

- Input Voltage Range: 4.75V to 18V
- Fixed 380kHz Frequency
- High Efficiency: up to 93%
- Output Current: 3A
- Current Mode Control
- Built-in Over Current Protection
- Built-in Thermal Shutdown Function
- Built-in UVLO Function
- Built-in Over Voltage Protection
- Programmable Soft-start

**Applications**

- Portable DVD
- DPF
- LCD-TV
- STB



Figure 1. Package Type of AP3203

## Pin Configuration

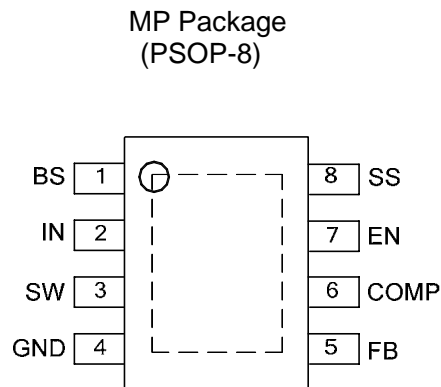


Figure 2. Pin Configuration of AP3203 (Top View)

## Pin Description

Pin Number	Pin Name	Function
1	BS	Bootstrap pin. A bootstrap capacitor is connected between the BS pin and SW pin. The voltage across the bootstrap capacitor drives the internal high-side NMOS switch
2	IN	Supply input pin. A capacitor should be connected between the IN pin and GND pin to keep the DC input voltage constant
3	SW	Power switch output pin. This pin is connected to the inductor and bootstrap capacitor
4	GND	Ground pin
5	FB	Feedback pin. This pin is connected to an external resistor divider to program the system output voltage. When the FB pin voltage exceeds 20% of the nominal regulation value of 1.222V, the over voltage protection is triggered. When the FB pin voltage is below 0.6V, the oscillator frequency is lowered to realize short circuit protection
6	COMP	Compensation pin. This pin is the output of the transconductance error amplifier and the input to the current comparator. It is used to compensate the control loop. Connect a series RC network from this pin to GND. In some cases, an additional capacitor from this pin to GND pin is required
7	EN	Control input pin. Forcing this pin above 1.5V or set this pin floating enables the IC. Forcing this pin below 0.5V shuts down the IC. When the IC is in shutdown mode, all functions are disabled to decrease the supply current below 1 $\mu$ A
8	SS	Soft-start control input. SS controls the soft-start period. Connect a capacitor from SS to GND to set the soft-start period. A 0.1 $\mu$ F capacitor sets the soft-start period to 10ms. To disable the soft-start feature, leave SS disconnected

**380kHz, 3A Asynchronous DC - DC Buck Converter**

**AP3203**

**Functional Block Diagram**


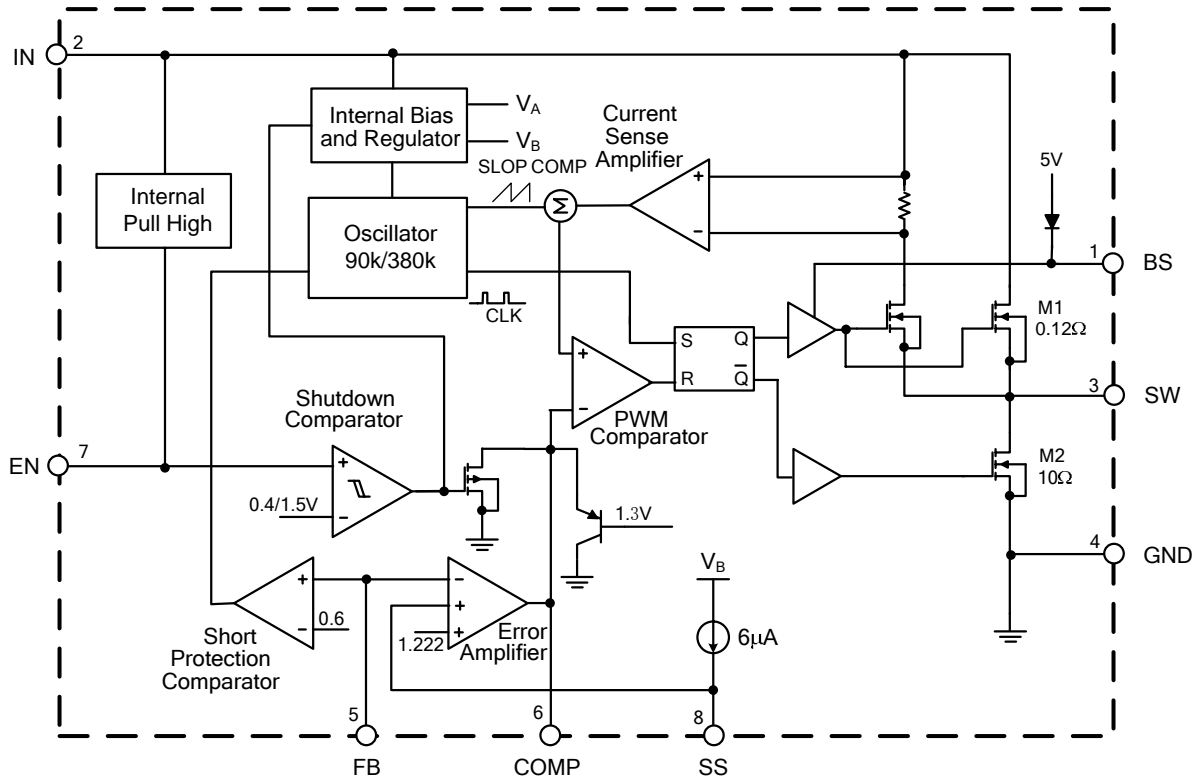


Figure 3. Functional Block Diagram of AP3203

**Ordering Information**

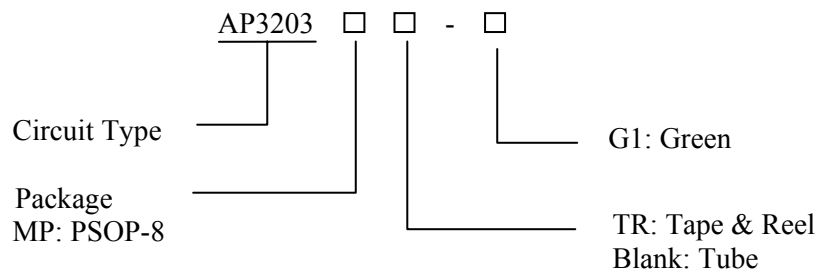

Package	Temperature Range	Part Number	Marking ID	Packing Type
PSOP-8	-40 to 85°C	AP3203MP-G1	3203MP-G1	Tube
		AP3203MPTR-G1	3203MP-G1	Tape & Reel

BCD Semiconductor's Pb-free products, as designated with "G1" suffix in the part number, are RoHS compliant and green.

**380kHz, 3A Asynchronous DC - DC Buck Converter****AP3203****Absolute Maximum Ratings (Note 1)**

Parameter	Symbol	Value	Unit
IN Pin Voltage	$V_{IN}$	-0.3 to 20	V
EN Pin Voltage	$V_{EN}$	-0.3 to $V_{IN}$	V
SW Pin Voltage	$V_{SW}$	21	V
BS Pin Voltage	$V_{BS}$	-0.3 to $V_{SW}+6$	V
FB Pin Voltage	$V_{FB}$	-0.3 to 6	V
COMP Pin Voltage	$V_{COMP}$	-0.3 to 6	V
SS Pin Voltage	$V_{SS}$	-0.3 to 6	V
Thermal Resistance	$\theta_{JA}$	105	°C/W
Operating Junction Temperature	$T_J$	150	°C
Storage Temperature	$T_{STG}$	-65 to 150	°C
Lead Temperature (Soldering, 10sec)	$T_{LEAD}$	260	°C
ESD (Machine Model)		200	V
ESD (Human Body Model)		2000	V

Note 1: Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” is not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.

**Recommended Operating Conditions**

Parameter	Symbol	Min	Max	Unit
Input Voltage	$V_{IN}$	4.75	18	V
Maximum Output Current	$I_{OUT} (Max)$	3		A
Operating Ambient Temperature	$T_A$	-40	85	°C



**380kHz, 3A Asynchronous DC - DC Buck Converter**

**AP3203**

**Electrical Characteristics**

$V_{IN}=V_{EN}=12V$ ,  $V_{OUT}=3.3V$ ,  $T_A=25^{\circ}C$ , unless otherwise specified. And those in **boldface type** apply over the full operating temperature rang ( $T_A=-40^{\circ}C$  to  $+85^{\circ}C$ ).

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Input Voltage	$V_{IN}$		4.75		18	V
Quiescent Current	$I_Q$	$V_{EN}=2V$ , $V_{FB}=1.35V$		1.0	1.5	mA
Shutdown Supply Current	$I_{SHDN}$	$V_{EN}=0V$		1	10	$\mu A$
Feedback Voltage	$V_{FB}$		<b>1.185</b>	<b>1.222</b>	<b>1.258</b>	V
Feedback Over Voltage Threshold	$V_{FBOV}$			1.48		V
Feedback SCP Voltage Threshold	$V_{FB\_SCP}$			0.6		V
Feedback Bias Current	$I_{FB}$	$V_{FB}=1V$	-0.1		0.1	$\mu A$
Upper Switch On-resistance	$R_{DSONH}$	$I_{SW}=0.5A$		0.12		$\Omega$
Lower Switch On-resistance	$R_{DSONL}$	$I_{SW}=0.05A$		10		$\Omega$
High-side Switch Leakage Current	$I_{LEAKH}$	$V_{IN}=18V$ , $V_{EN}=0V$ $V_{SW}=0V$		0.1	10	$\mu A$
High-side Switch Current Limit	$I_{LIMH}$		4	5.2		A
Low-side Switch Current Limit	$I_{LIML}$	From Drain to Source		0.15		A
EN Pin Threshold	$V_{ENH}$		1.5			V
	$V_{ENL}$				0.5	V
EN Pull-up Current	$I_{EN\_PH}$	$V_{EN}=0V$		1.0		$\mu A$
Input UVLO Threshold	$V_{UVLO}$	$V_{IN}$ Rising	3.55	3.85	4.15	V
Input UVLO Hysteresis	$V_{HYS}$			0.3		V
Oscillator Frequency	$f_{OSC1}$			380		kHz
Short Circuit Oscillator Frequency	$f_{OSC2}$			80		kHz
Maximum Duty Cycle	$D_{MAX}$	$V_{FB}=1.0V$		90		%
Minimum Duty Cycle	$D_{MIN}$	$V_{FB}=1.35V$			0	%
Error Amplifier Voltage Gain (Note 3)	$A_{EA}$			400		V/V
Error Amplifier Transconductance	$G_{EA}$		700	950	1200	$\mu A/V$
COMP to Current Sense Transconductance	$G_{CS}$			5.4		A/V
Thermal Shutdown (Note 3)	$T_{OTSD}$			160		$^{\circ}C$
Thermal Shutdown Hysteresis (Note 3)	$T_{HYS}$			30		$^{\circ}C$
Soft-start Time (Note 3)	$t_{SS}$	$C4=0.1\mu F$ , $I_{OUT}=500mA$		10		ms
Soft-start Current	$I_{SS}$			6		$\mu A$



**380kHz, 3A Asynchronous DC - DC Buck Converter**

**AP3203**

Note 2:  $R_{DS(ON)} = \frac{V_{SW1} - V_{SW2}}{I_{SW1} - I_{SW2}}$

Note 3: Not tested, guaranteed by design.

**Typical Performance Characteristics**

T<sub>A</sub>=25°C, V<sub>IN</sub>=12V, V<sub>OUT</sub>=3.3V, unless otherwise noted.

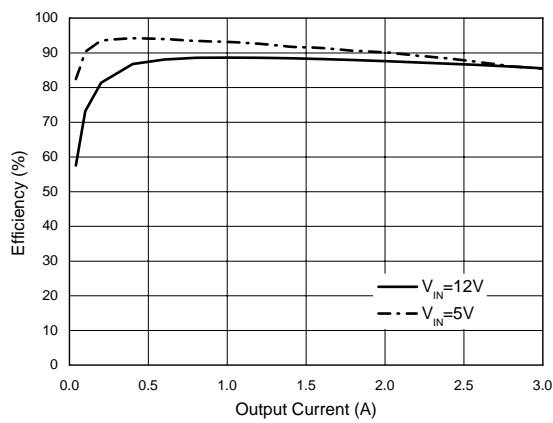


Figure 4. Efficiency vs. Output Current

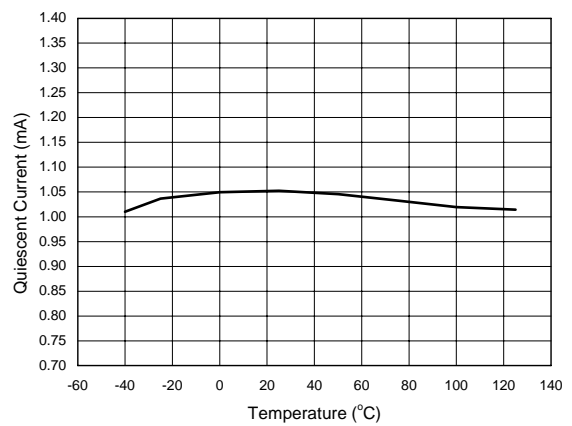


Figure 5. Quiescent Current vs. Temperature

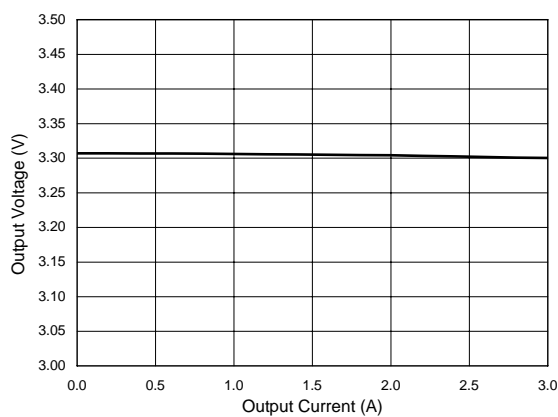


Figure 6. Output Voltage vs. Output Current

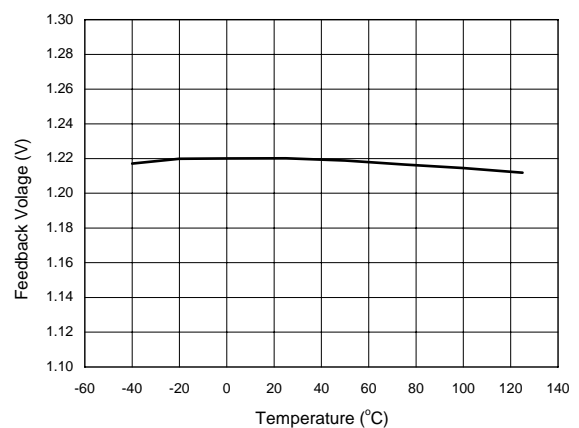


Figure 7. Feedback Voltage vs. Temperature

**380kHz, 3A Asynchronous DC - DC Buck Converter**

**AP3203**

**Typical Performance Characteristics (Continued)**

$T_A=25^{\circ}\text{C}$ ,  $V_{IN}=12\text{V}$ ,  $V_{OUT}=3.3\text{V}$ , unless otherwise noted.

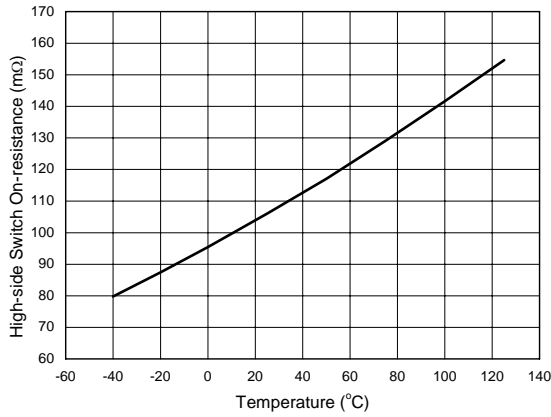


Figure 8.  $R_{DS\text{ON}H}$  vs. Temperature

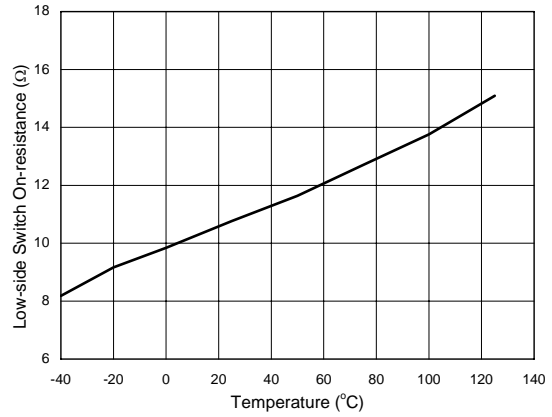


Figure 9.  $R_{DS\text{ON}L}$  vs. Temperature

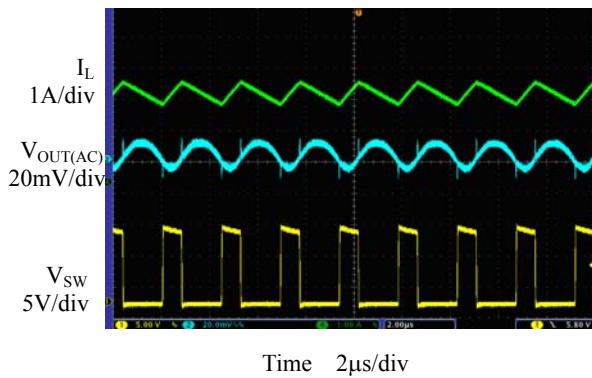


Figure 10. Output Ripple  
( $V_{IN}=12\text{V}$ ,  $V_{OUT}=3.3\text{V}$ ,  $I_{OUT}=3\text{A}$ )

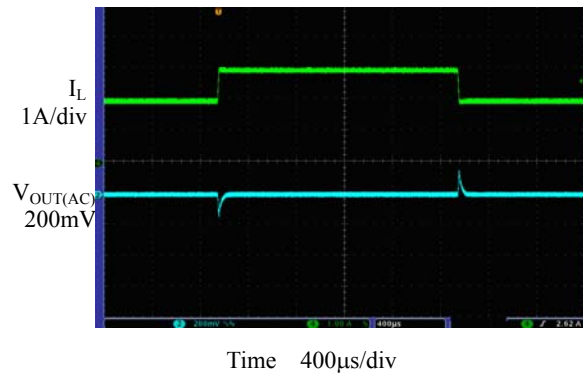


Figure 11. Load Transient  
( $V_{IN}=12\text{V}$ ,  $V_{OUT}=3.3\text{V}$ ,  $I_{OUT}=2\text{A}$  to  $3\text{A}$ )

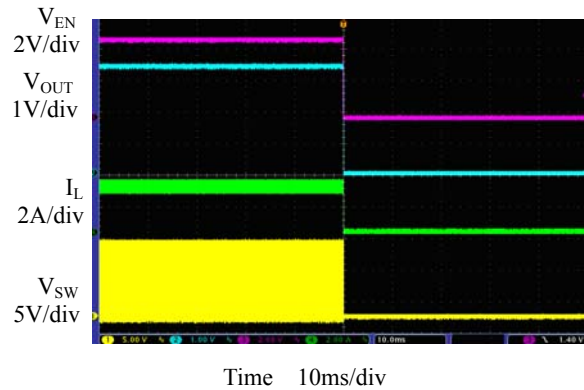
**Typical Performance Characteristics (Continued)**
 $T_A=25^\circ\text{C}$ ,  $V_{IN}=12\text{V}$ ,  $V_{OUT}=3.3\text{V}$ , unless otherwise noted.


Figure 12. Enable Turn Off  
 ( $V_{IN}=12\text{V}$ ,  $V_{OUT}=3.3\text{V}$ ,  $I_{OUT}=3\text{A}$ , with Resister load)

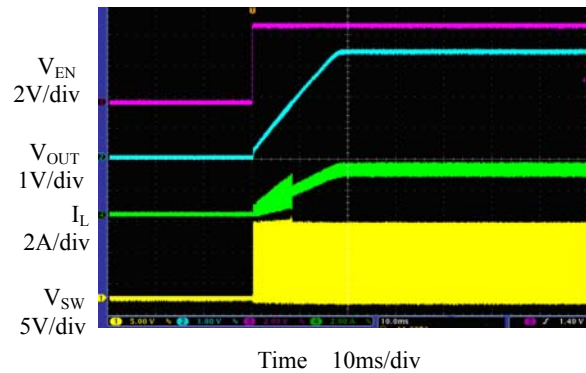


Figure 13. Enable Turn On  
 ( $V_{IN}=12\text{V}$ ,  $V_{OUT}=3.3\text{V}$ ,  $I_{OUT}=3\text{A}$ , with Resistance Load)

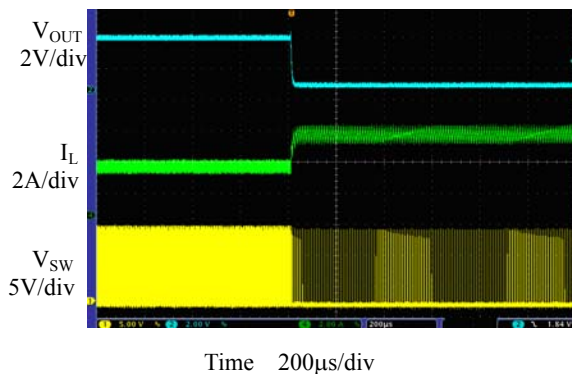


Figure 14. Short Circuit Protection  
 ( $V_{IN}=12\text{V}$ ,  $V_{OUT}=3.3\text{V}$ ,  $I_{OUT}=3\text{A}$ )

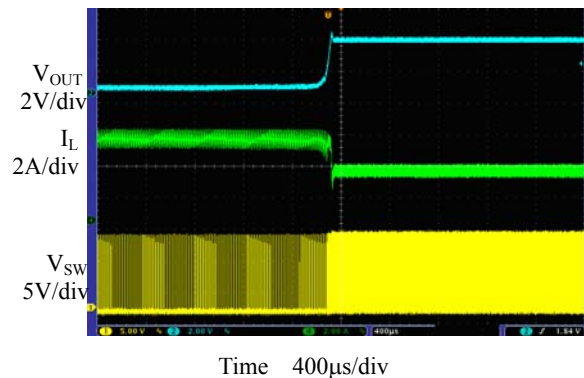


Figure 15. Short Circuit Recovery  
 ( $V_{IN}=12\text{V}$ ,  $V_{OUT}=3.3\text{V}$ ,  $I_{OUT}=3\text{A}$ )





**Typical Application**


Figure 8. Typical Application of AP3203

**Mechanical Dimensions**

**PSOP-8**

**Unit: mm(inch)**

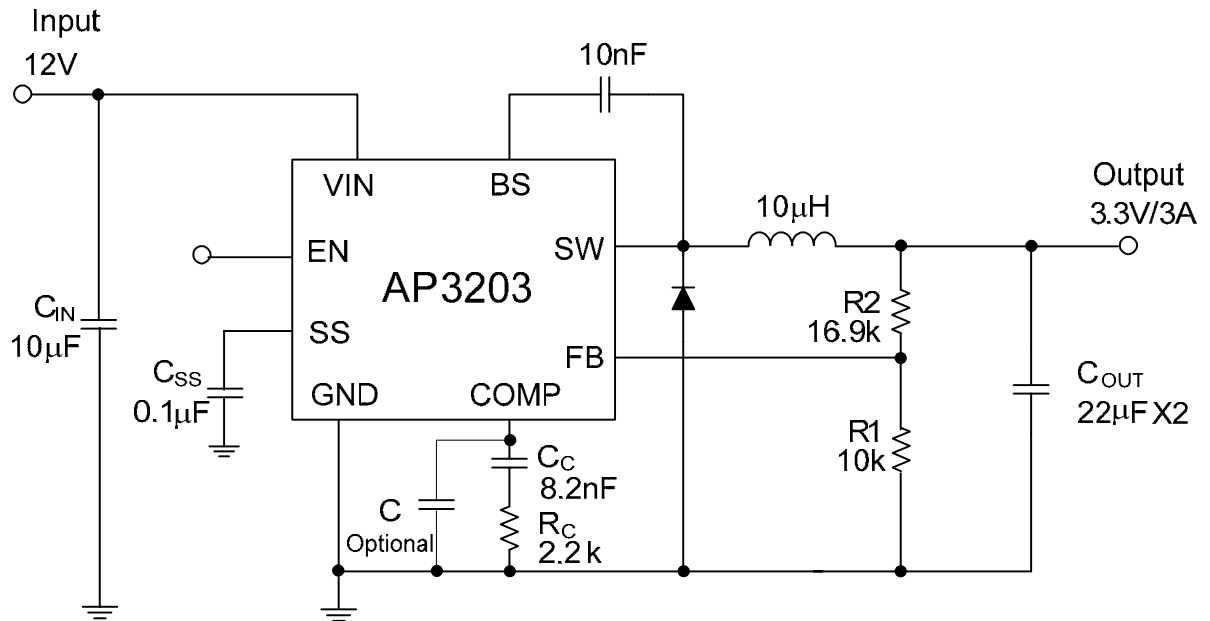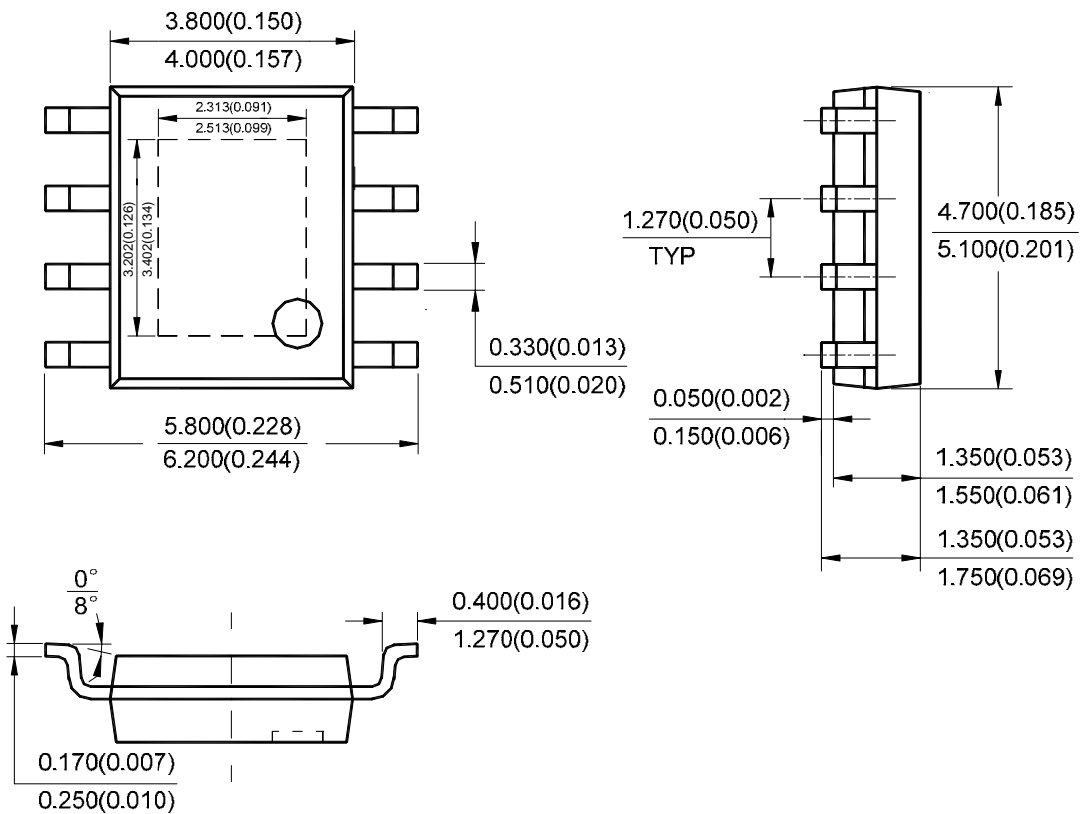

Note: Eject hole, oriented hole and mold mark is optional.



## **BCD Semiconductor Manufacturing Limited**

<http://www.bcdsemi.com>

### **IMPORTANT NOTICE**

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

---

#### **MAIN SITE**

##### **- Headquarters**

##### **BCD Semiconductor Manufacturing Limited**

No. 1600, Zi Xing Road, Shanghai Zizhu Science-based Industrial Park, 200241, China  
Tel: +86-21-24162266, Fax: +86-21-24162277

##### **- Wafer Fab**

##### **Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.**

800 Yi Shan Road, Shanghai 200233, China  
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

#### **REGIONAL SALES OFFICE**

##### **Shenzhen Office**

##### **Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office**

Unit A Room 1203, Skyworth Bldg., Gaoxin Ave. 1.S., Nanshan District, Shenzhen, China  
Tel: +86-755-8826 7951  
Fax: +86-755-8826 7865

##### **Taiwan Office**

##### **BCD Semiconductor (Taiwan) Company Limited**

4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan  
Tel: +886-2-2656 2808  
Fax: +886-2-2656 2806

##### **USA Office**

##### **BCD Semiconductor Corp.**

30920 Huntwood Ave. Hayward, CA 94544, USA  
Tel : +1-510-324-2988  
Fax: +1-510-324-2788



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.