


### Features

- Guard Ring Die Construction for Transient Protection
- Ideally Suited for Automatic Assembly
- Low Power Loss, High Efficiency
- Surge Overload Rating to 100A Peak
- For Use in Low Voltage, High Frequency Inverters, Free Wheeling, and Polarity Protection Application

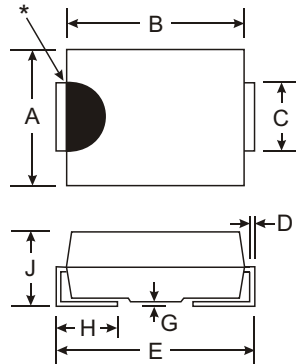

Dim	SMA		SMB		SMC	
	Min	Max	Min	Max	Min	Max
A	2.29	2.92	3.30	3.94	5.59	6.22
B	4.00	4.60	4.06	4.57	6.60	7.11
C	1.27	1.63	1.96	2.21	2.75	3.18
D	0.15	0.31	0.15	0.31	0.15	0.31
E	4.80	5.59	5.00	5.59	7.75	8.13
G	0.10	0.20	0.10	0.20	0.10	0.20
H	0.76	1.52	0.76	1.52	0.76	1.52
J	2.01	2.62	2.00	2.62	2.00	2.62
All Dimensions in mm						

### Mechanical Data

- Case: Molded Plastic
- Plastic Material - UL Flammability Classification 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solder Plated Terminal - Solderable per MIL-STD-202, Method 208
- Also Available in Lead Free Plating (Matte Tin Finish). Please See Ordering Information, Note 5, on Page 3
- Polarity: Cathode Band
- Approx. Weight: SMA 0.064 grams  
SMB 0.093 grams  
SMC 0.21 grams
- Marking: Type Number (See Page 3)

"A" Suffix Designates SMA Package

"B" Suffix Designates SMB Package

No Suffix Designates SMC Package


\*: Note: Device may have a semicircular indentation/notch on one side of the device (as shown).

### Maximum Ratings and Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified


Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

Characteristic	Symbol	B320/A/B	B330/A/B	B340/A/B	B350/A/B	B360/A/B	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	20	30	40	50	60	V
RMS Reverse Voltage	V <sub>R(RMS)</sub>	14	21	28	35	42	V
Average Rectified Output Current @ T <sub>T</sub> = 100°C	I <sub>O</sub>	3.0					A
Non-Repetitive Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	100					A
Forward Voltage (Note 3) @ I <sub>F</sub> = 3.0A	V <sub>FM</sub>	0.50		0.70			V
Peak Reverse Current @ T <sub>A</sub> = 25°C at Rated DC Blocking Voltage (Note 3) @ T <sub>A</sub> = 100°C	I <sub>RM</sub>	0.5			20		mA
Typical Capacitance (Note 2)	C <sub>T</sub>	250					pF
Typical Thermal Resistance, Junction to Terminal (Note 1)	R <sub>θJT</sub>	10					°C/W
Typical Thermal Resistance, Junction to Ambient	R <sub>θJA</sub>	50					°C/W
Operating Temperature Range	T <sub>j</sub>	-55 to +125					°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150					°C


- Notes:
1. Thermal Resistance: Junction to terminal, unit mounted on PC board with 5.0 mm<sup>2</sup> 0.013 mm thick) copper pad as heat sink.
  2. Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.
  3. Short duration test pulse used to minimize self-heating effect.

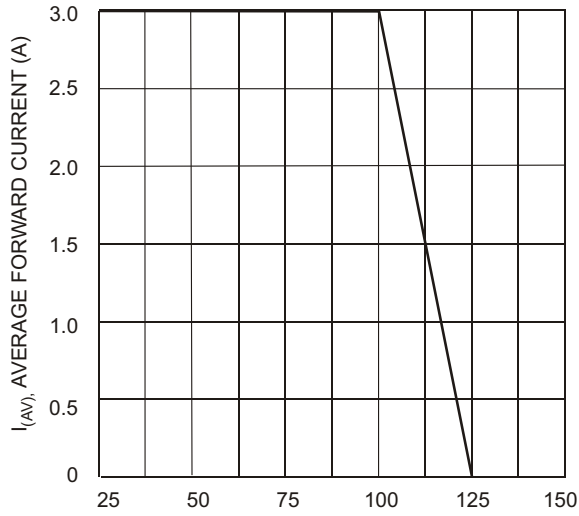

$T_T$ , TERMINAL TEMPERATURE ( $^{\circ}\text{C}$ )  
Fig. 1 Forward Current Derating Curve

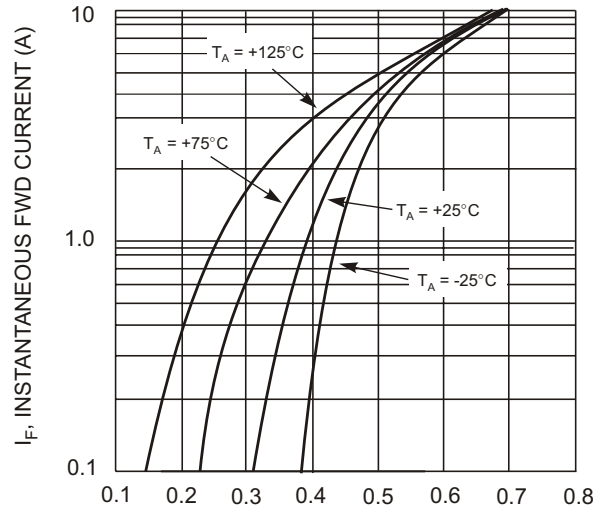

$V_F$ , INSTANTANEOUS FORWARD VOLTAGE (V)  
Fig. 2 Typical Forward Characteristics - B320/A/B thru B340/A/B

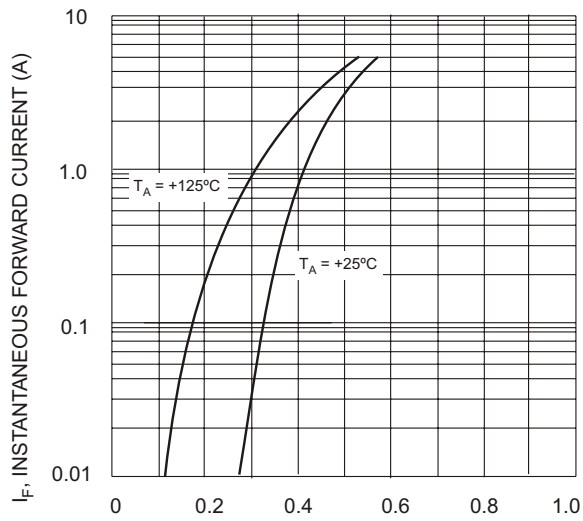

$V_F$ , INSTANTANEOUS FORWARD VOLTAGE (V)  
Fig. 3 Typ. Forward Characteristics - B350/A/B thru B360/A/B



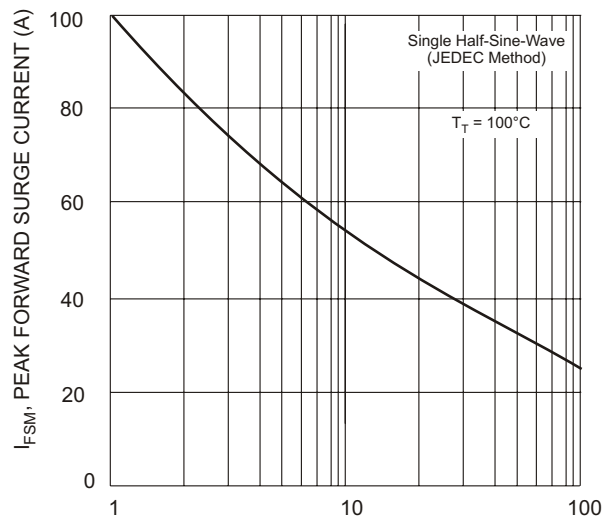



Fig. 4 Max Non-Repetitive Peak Fwd Surge Current

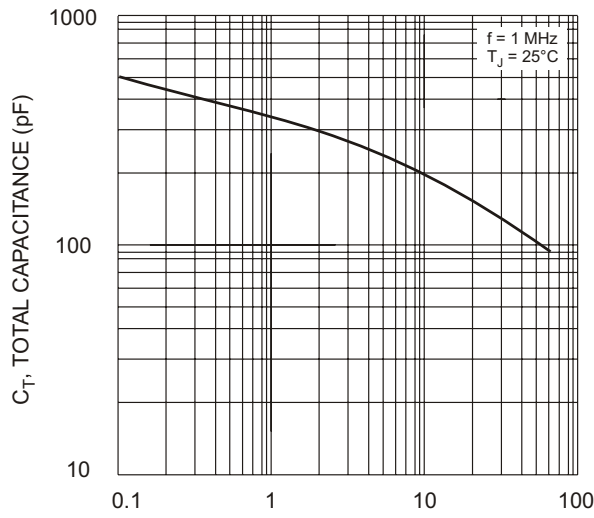

$V_R$ , REVERSE VOLTAGE (V)  
Fig. 5 Typical Capacitance

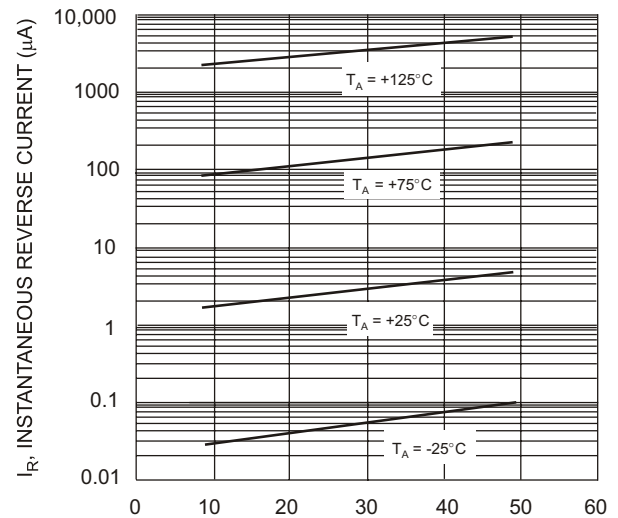


$V_R$ , INSTANTANEOUS REVERSE VOLTAGE (V)  
Fig. 6 Typical Reverse Characteristics, B320/A/B thru B340/A/B

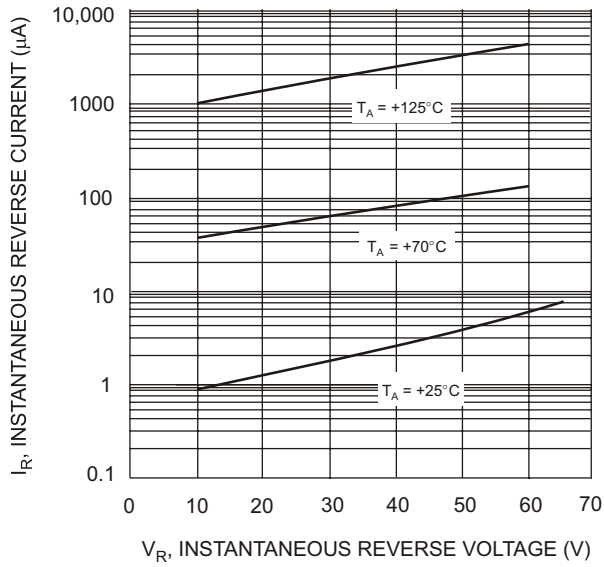

**Ordering Information** (Note 4 & 5)

Device*	Packaging	Shipping
B3XXA-13	SMA	5000/Tape & Reel
B3XXB-13	SMB	3000/Tape & Reel
B3XX-13	SMC	3000/Tape & Reel

- Notes:
4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.
  - \* xx = Device type, e.g. B320A-13 (SMA package); B320B-13 (SMB package); B320-13 (SMC Package).
  5. For lead free terminal plating part number, please add "-F" suffix to part number above. Example: B320A-13-F.



BXXX = Product type marking code, ex: B320 (SMC package)  
 BXXXX = Product type marking code, ex: B320A (SMA package)  
 D = Manufacturers' code marking  
 YWW = Date code marking  
 Y = Last digit of year ex: 2 for 2002  
 WW = Week code 01 to 52

Note: Device has a cathode band (as shown above) and may also have a cathode notch (as shown on Page 1).



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.